

Technical Information Bulletin


LED Lamps



Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 66972
 Description: LED/A19/9.8W/40K/STD 4P
 UPC: 69549669727
 Case quantity: 12 x 4 pack

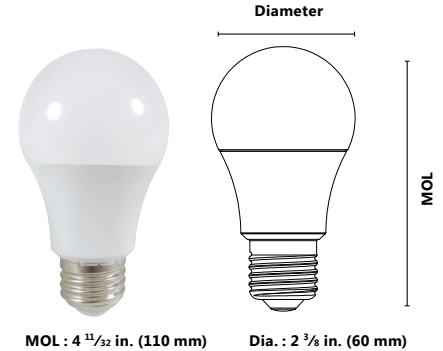

PERFORMANCE DATA PER LAMP

Shape: A19 4 pack
 Base: E26
 Wattage (W): 9.8
 Lamp voltage (VAC): 120
 Colour temperature (K)**: 4 000
 Average life (L70 hours): 25 000
 Initial lumens (lm)*: 874
 Initial lumens per watt (lm/W): 89
 CRI: 86
 Beam angle (°): 220
 Power factor: 0.98
 Operating temperature range: -20 °C to 40 °C (-4 °F to 104 °F)

*Initial lumens range: +/- 10 % **Typical colour temperature range: +/- 5 %

COMPATIBLE DIMMERS

Cooper	AAL06, DAL06P, SLC03P
Leviton	6615, 6674, DSM10-1LZ, IPL06
Lutron	DVCL-253P, DVELV-300P, MACL-153P



CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Added weight of the device may cause instability of a freestanding portable luminaire. Use in portable table lamps in which the distance from the bottom of the base to the top of the lamp holder does not exceed three (3) times the minimum base diameter.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- For complete dimmer and warranty information visit www.standardpro.com.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.