



# LED General Purpose Lamps

Combining a comfortable, pleasing atmosphere with energy efficiency is now possible with STANDARD's smooth dimming LED lamps. Choose from our large selection of lamp shapes and create your own style while saving on energy and maintenance costs.

From Omni lamps to small halogen replacements, these lamps deliver a brighter look and provide the same even, crisp and comfortable lighting as traditional lamps. A wide selection of colour temperatures is offered to obtain the desired lighting effect and can be adapted to all applications.



Order code	Description	Watts (W)	Base	Volts (VAC)	Colour temp. (K)	Finish	CRI	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Dimming capability (Yes/No)	Case qty (Inner/master)
<b>A19 Omni</b>												
<b>40 W equivalent</b>												
64809	LED/OMNI/S3/5.5W/27K/STD	5.5	E26	120	2 700	Frost	81	25 000	455	40	Yes	1/60
66177	LED/A19/S4/6W/30K/STD	6	E26	120	3 000	Frost	84	25 000	533	40	Yes	6/48
64811	LED/OMNI/S3/5.5W/40K/STD	5.5	E26	120	4 000	Frost	83	25 000	563	40	Yes	1/60
64812	LED/OMNI/S3/5.5W/50K/STD	5.5	E26	120	5 000	Frost	86	25 000	545	40	Yes	1/60
<b>60 W equivalent</b>												
66180	LED/A19/S4/9.8W/27K/STD	9.8	E26	120	2 700	Frost	83	25 000	814	60	Yes	6/48
66181	LED/A19/S4/9.8W/30K/STD	9.8	E26	120	3 000	Frost	83	25 000	848	60	Yes	6/48
66182	LED/A19/S4/9.8W/40K/STD	9.8	E26	120	4 000	Frost	86	25 000	874	60	Yes	6/48
66183	LED/A19/S4/9.8W/50K/STD	9.8	E26	120	5 000	Frost	85	25 000	858	60	Yes	6/48
<b>60 W equivalent - GU24</b>												
66275	A19/9.8W/27K/GU24/PRO/STD	9.8	GU24	120	2 700	Frost	83	25 000	814	60	Yes	6/48
66276	A19/9.8W/30K/GU24/PRO/STD	9.8	GU24	120	3 000	Frost	82	25 000	887	60	Yes	6/48
64961	LED/OMNI/S2/9.5W/40K/GU24/STD	9.5	GU24	120	4 000	Frost	83	25 000	866	60	Yes	6/48
<b>75 W equivalent</b>												
65411	LED/OMNI/S3/11W/27K/STD	11	E26	120	2 700	Frost	82	15 000	1 112	75	Yes	1/60
65412	LED/OMNI/S3/11W/30K/STD	11	E26	120	3 000	Frost	82	15 000	1 190	75	Yes	1/60
66186	LED/A19/S4/11W/40K/STD	11	E26	120	4 000	Frost	85	25 000	1 196	75	Yes	6/48
66187	LED/A19/S4/11W/50K/STD	11	E26	120	5 000	Frost	86	25 000	1 178	75	Yes	6/48
<b>100 W equivalent</b>												
65415	LED/A21/S3/16W/27K/STD	16	E26	120	2 700	Frost	83	15 000	1 600	100	Yes	1/60
66189	LED/A19/S4/15W/30K/STD	15	E26	120	3 000	Frost	81	25 000	1 630	100	Yes	6/48
66190	LED/A19/S4/15W/40K/STD	15	E26	120	4 000	Frost	85	25 000	1 692	100	Yes	6/48
66191	LED/A19/S4/15W/50K/STD	15	E26	120	5 000	Frost	85	25 000	1 725	100	Yes	6/48
<b>Trilight</b>												
65613	LED/A19/S2/12W/27K/3WAY/STD	3	E26	120	2 700	Frost	81	25 000	280	30	No	6/24
		9							950	70		
		12							1 200	100		
65614	LED/A19/S2/12W/30K/3WAY/STD	3	E26	120	3 000	Frost	83	25 000	280	30	No	6/24
		9							950	70		
		12							1 200	100		



DAMP

ENCLOSED  
FIXTUREBEAM  
SPREAD3  
YEARS  
WARRANTY

UL US




ENERGY STAR

Lumen values are derived from photometric testing.  
For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)



A15

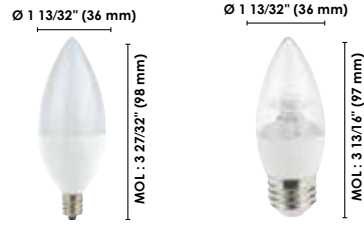

C12



G16.5



G25

Order code	Description	Watts (W)	Base	Volts (VAC)	Colour temp. (K)	Finish	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (inner/master)
<b>A15</b>										
63745	LED/A15/5W/27K/STD	5	E26	120	2 700	Clear	25 000	300	40	6/48
63744	LED/A15/5W/27K/F/STD	5	E26	120	2 700	Frost	25 000	300	40	6/48
63731	LED/A15/5W/40K/F/STD	5	E26	120	4 000	Frost	25 000	300	40	6/48
66758 <sup>1</sup>	A15/S2/6W/27K/CL/STD	6	E26	120	2 700	Clear	15 000	450	60	24/48
63734	LED/A15/7W/27K/F/STD	7	E26	120	2 700	Frost	25 000	507	60	6/48
63735	LED/A15/7W/30K/F/STD	7	E26	120	3 000	Frost	25 000	514	60	6/48
63732	LED/A15/7W/40K/F/STD	7	E26	120	4 000	Frost	25 000	505	60	6/48
<b>C12</b>										
63742	LED/C12/3W/27K/STD	3	E26	120	2 700	Clear	25 000	200	25	6/48
63741	LED/C12/3W/27K/E12/STD	3	E12	120	2 700	Clear	25 000	200	25	6/48
63739	LED/C12/3W/27K/F/E12/STD	3	E12	120	2 700	Frost	25 000	200	25	6/48
63743	LED/C12/5W/27K/STD	5	E26	120	2 700	Clear	25 000	316	40	6/48
66765 <sup>1</sup>	C12/S2/4.5W/27K/E12/FR/STD	4.5	E12	120	2 700	Frost	15 000	331	40	24/48
<b>G16.5</b>										
63736	LED/G16.5/3W/27K/E12/STD	3	E12	120	2 700	Clear	25 000	200	25	6/48
66766 <sup>1</sup>	G16.5/S2/5W/27K/E12/CL/STD	5	E12	120	2 700	Clear	15 000	365	40	24/48
63738	LED/G16.5/5W/27K/E12/F/STD	5	E12	120	2 700	Frost	25 000	375	40	6/48
<b>G25</b>										
63622	LED/G25/6W/30K/F/STD	6	E26	120	3 000	Frost	25 000	470	40	6/24



Lumen values are derived from photometric testing. For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com). <sup>1</sup> Available May 2018



02

Order code	Description	Watts (W)	Base	Volts (VAC)	Colour temp. (K)	Finish	Life L70 (hrs)	Lumen output (lm)	Beam angle (°)	Traditional equivalent (W)	Dimming capability (Yes/No)	Case qty (inner/master)
<b>G9</b>												
63618	LED/G9/2.5W/27K/STD	2.5	G9	120	2 700	Frost	20 000	190	300	20	Yes	50/200
63619	LED/G9/2.5W/30K/STD	2.5	G9	120	3 000	Frost	20 000	200	300	20	Yes	50/200
63620	LED/G9/2.5W/40K/STD	2.5	G9	120	4 000	Frost	20 000	210	300	20	Yes	50/200
63444 <sup>2</sup>	LED/G9/3.5W/27K/STD	3.5	G9	120	2 700	Frost	30 000	210	300	20	Yes	50/500
63445 <sup>2</sup>	LED/G9/3.5W/30K/STD	3.5	G9	120	3 000	Frost	30 000	225	300	20	Yes	50/500
63446 <sup>2</sup>	LED/G9/3.5W/40K/STD	3.5	G9	120	4 000	Frost	30 000	245	300	20	Yes	50/500
66692	G9HO/S2/4W/27K/FR/STD	4	G9	120	2 700	Frost	10 000	430	330	40	Yes	50/200
66690	G9HO/S2/4W/30K/CL/STD	4	G9	120	3 000	Clear	10 000	480	330	40	Yes	50/200
66693	G9HO/S2/4W/30K/FR/STD	4	G9	120	3 000	Frost	10 000	450	330	40	Yes	50/200
66694	G9HO/S2/4W/40K/FR/STD	4	G9	120	4 000	Frost	10 000	450	330	40	Yes	50/200
66691	G9HO/S2/4W/50K/CL/STD	4	G9	120	5 000	Clear	10 000	480	330	40	Yes	50/200
<b>T3-R7S</b>												
64466 <sup>1</sup>	LED/R7S/5W/30K/78/ND/STD	5	R7S	120	3 000	Clear	15 000	450	360	50	No	50/200
64467 <sup>1</sup>	LED/R7S/8W/30K/118/ND/STD	8	R7S	120	3 000	Clear	15 000	650	360	100	No	50/200

Lumen values are derived from photometric testing. For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)

