


ORDERING INFORMATION

Order code: 10068
 Description: BMH0070/TRITAP/F/HX/H/STD
 UPC: 69549100688



SPECIFICATIONS

Ballast type: Magnetic metal halide
 Ballast style: F-can
 Circuit type: HX-HPF
 ANSI code: M98
 Input voltage (V): 120/277/347
 Input frequency (Hz): 60
 Line volt regulation: $\pm 5\%$
 Line watt regulation: $\pm 10\%$
 Insulation class: A (105°)

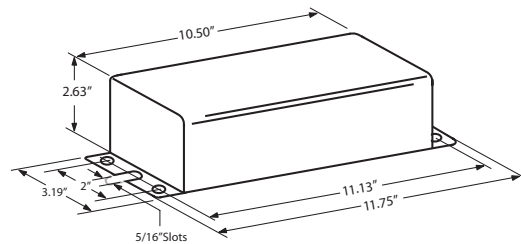

Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
120	0.85	1.95	0.65	70	94	250	84	A	5	0.47 - 0.66	0.90	-20°F / -30°C
277	0.37	0.85	0.30	70	94	250	194	A	2	0.20 - 0.30	0.90	-20°F / -30°C
347	0.30	0.70	0.25	70	94	250	242	A	2	0.16 - 0.23	0.90	-20°F / -30°C

HIGH POTENTIAL TEST (V)


1 minute:	2 000
2 seconds:	2 500
OCV test:	220 - 280
Short circuit:	0.95 - 1.20

BALLAST DIMENSIONS

Lead Lengths:	12.00"
Weight (lbs):	11.50

WIRING DIAGRAM

Ground ballast core

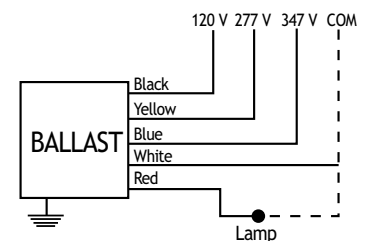

ADDITIONAL INFORMATION

Sound rating : B
 Ignitor included as part of potted assembly
 Ballast to lamp distance (BTL) : 50 feet
 Temp.rating : 90°C