


ORDERING INFORMATION

Order code: 10071
 Description: BMH0175/TRITAP/F/CWA/H/STD
 UPC: 69549100718



SPECIFICATIONS

Ballast type: Magnetic metal halide
 Ballast style: F-can
 Circuit type: CWA
 ANSI code: M57 or H39
 Input voltage (V): 120/277/347
 Input frequency (Hz): 60
 Line volt regulation: $\pm 10\%$
 Line watt regulation: $\pm 10\%$
 Insulation class: A (105°)

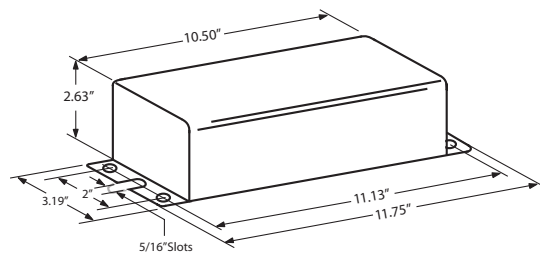

Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
120	1.75	1.75	1.09	175	205	310	66	A	5	0.70 - 1.15	0.90	-20°F / -30°C
277	0.75	0.75	0.48	175	205	310	152	A	3	0.30 - 0.50	0.90	-20°F / -30°C
347	0.62	0.62	0.38	175	205	310	192	A	2	0.20 - 0.40	0.90	-20°F / -30°C

HIGH POTENTIAL TEST (V)


1 minute:	2 000
2 seconds:	2 500
OCV test:	280 - 340
Short circuit:	1.50 - 1.80

BALLAST DIMENSIONS

Lead Lengths:	12.00"
Weight (lbs):	13.00

WIRING DIAGRAM

Ground ballast core

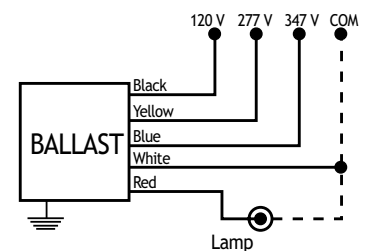

ADDITIONAL INFORMATION

Sound rating : B