


ORDERING INFORMATION

Order code: 10072
 Description: BMH0250/TRITAP/F/CWA/H/STD
 UPC: 69549100725



SPECIFICATIONS

Ballast type: Magnetic metal halide
 Ballast style: F-can
 Circuit type: CWA
 ANSI code: M58 or H37
 Input voltage (V): 120/277/347
 Input frequency (Hz): 60
 Line volt regulation: $\pm 10\%$
 Line watt regulation: $\pm 10\%$
 Insulation class: A (105°)

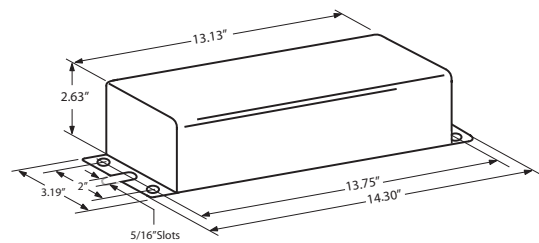

| Input voltage (V) | Operating current (A) | Open circuit current (A) | Starting current (A) | Rated lamp watts (W) | Input watts (W) | OCV (V) | Dropout voltage (V) | UL 1029 code | Fuse rating (A) | Input current (A) | Power factor | Starting temperature |
|-------------------|-----------------------|--------------------------|----------------------|----------------------|-----------------|---------|---------------------|--------------|-----------------|-------------------|--------------|----------------------|
| 120 | 2.60 | 2.40 | 1.50 | 250 | 295 | 310 | 66 | A | 8 | 0.95 - 1.85 | 0.90 | -20°F / -30°C |
| 277 | 1.10 | 1.05 | 0.67 | 250 | 295 | 310 | 155 | A | 4 | 0.40 - 0.80 | 0.90 | -20°F / -30°C |
| 347 | 0.87 | 0.82 | 0.53 | 250 | 295 | 310 | 192 | A | 3 | 0.31 - 0.65 | 0.90 | -20°F / -30°C |

HIGH POTENTIAL TEST (V)


| | |
|----------------|-------------|
| 1 minute: | 2 000 |
| 2 seconds: | 2 500 |
| OCV test: | 280 - 340 |
| Short circuit: | 2.15 - 2.65 |

BALLAST DIMENSIONS

| | |
|---------------|--------|
| Lead Lengths: | 12.00" |
| Weight (lbs): | 15.50 |

WIRING DIAGRAM

Ground ballast core

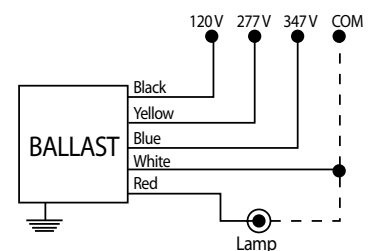

ADDITIONAL INFORMATION

Sound rating : C