

ATK

Single Circuit Extruded Aluminum Track, 2-12 Feet Track & Power Feeds

Job Information	
Project Name	
Type	
Location	
Quantity	
Date	

Description

The ATK series is an extruded aluminum track for use with A-Line track fixtures. Available in 2', 4', 6', 8' and 12' nominal length.

Features

Extrusion

Constructed of 0.06" extruded aluminum with 0.045" PVC bus bar support holding 12 gauge round bus bars. Polarity groove is located on face of track to indicate location of grounding conductor.

Mounting

This track is surface mounted using the supplied mounting hardware. Suspended mounting is available with accessories (ordered separately).

Labels

cULus listed.

Electrical


Single circuit power distribution system designed to supply lighting unit flexibly. Single hot and neutral conductors are rated for max. 20 Amps at 120V. Copper electrical conductors are concealed in thermo-plastic, low-profile track section.

Compatibility

Track system is compatible with all A-Line® and Juno® style track fixtures, accessories and connectors.



Technical Drawings

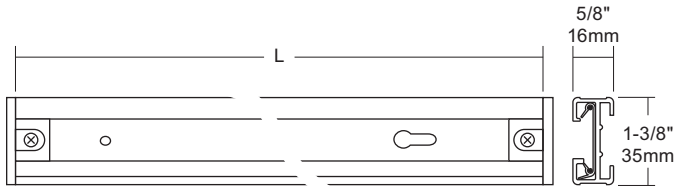

Part No.	Length (Excluding end caps)
ATK02	20 ¹ / ₈ " (511mm)
ATK04	44 ¹ / ₈ " (1121mm)
ATK06	68 ¹ / ₈ " (1730mm)
ATK08	92 ¹ / ₈ " (2340mm)
ATK12	140 ¹ / ₈ " (3559mm)

Ordering Guide

ATK	Length	-	Colour
	02 : 2'		BK : Black
	04 : 4'		BN : Brushed Nickel
	06 : 6'		SL : Silver
	08 : 8'		WH : White
	12 : 12'		

Example: ATK04-BN

Notes:

Accessories should be ordered separately. For additional options please consult your A-Line Lighting representative. Juno is a registered trademark of Juno Lighting Group. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Accessories



ATKC01
Single circuit 'I' connector.



ATKP02
Single circuit 'L' and 'I' power feed connector.



ATKP03
Single circuit 'T' power feed connector.



ATKC05
Single circuit flexible connector.



ATKP06
Single circuit live end conduit feed.



ATKP08
Single circuit center feed.



ATKP09
Single circuit live end power feed.



ATKP10
Single circuit wired end power feed, with 15' plug-in cord.



ATKP11
Single circuit live end power feed with canopy cover.



ATK0-ENDCAP-1C
Single circuit track end cap.



ATKPCL-06-1C
Single circuit live end narrow current limiter, 1-14 amp options



ATKPCL-09-1C
Single circuit dual live end canopy current limiter, 1-14 amp options



ATKPCL-11-1C
Single circuit live end canopy current limiter, 1-14 amp options



ATKXW12
12" Suspension rod system.



ATKXW18
18" Suspension rod system.



ATKXW24
24" Suspension rod system.



ATKXW36
36" Suspension rod system.



ATKXW48
48" Suspension rod system.



ATKA250S
4¾" Sloped ceiling canopy kit.



TDR62
Stem rod kit to suspend track system from ceiling, 6" ~ 72" options.



ATK02-PDW1
2' Precision Pro Channel, ½" drywall, for single circuit track.



ATK02-PDW5
2' Precision Pro Channel, ¾" drywall, for single circuit track.



ATK04-PDW1
4' Precision Pro Channel, ½" drywall, for single circuit track.



ATK04-PDW5
4' Precision Pro Channel, ¾" drywall, for single circuit track.