

**Features**

- Stainless steel mesh is corrosion resistant
- Multiweave grip gives cable arc-of-bend control
- Endless weave provides easy cable/flexible conduit installation

**Ordering Information**

Description	Form Size	Cable	UPC	Catalog Number
Straight Male Thread, F5 Stainless Steel Mesh, Liquidtight		1.000"-1.125" (2.54-2.86)	783585322117	<b>07401030</b>

**Listings**


UL Listed  
CSA Certified

**Specifications**

Strand	Stainless Steel
Body	Aluminum

**Performance**

Environmental	
Flammability	UL 94HB (Strand grip), UL 94V-2(Fitting)
Hazardous Locations	Suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 N.E.C
Operating Temperatures	-30°F to +240°F (-34°C to +115°C)
Wet Locations	Suitable for use in wet locations when used with a listed sealing ring between box and fitting

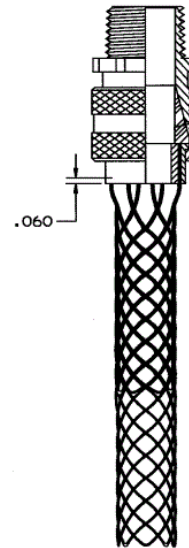

**Related Products**

Locknut	00322005LPK50
Metal Clad Sealing O-Ring	20509005

**Online Resources**

Customer Sales Drawings  
eCatalog  
Installation Instructions