


C-Type Grounding Clamps



T6000465
Bronze body,
Smooth jaws,
Bronze eyescrew
with fine threads,
Tapped for 5/8-11 UNC threaded ferrule
or T6000466,
Drilled for 5/8-11 UNC threaded ferrule




T6000790
Bronze body,
Smooth jaws,
Bronze T-handle/eyescrew
with fine threads,
Tapped for 5/8-11 UNC
threaded ferrule




C6002271
Bronze body,
Smooth jaws,
Bronze eyescrew
with fine threads,
Tapped for 5/8-11 UNC
threaded ferrule



C6001959
Bronze body,
Smooth jaws,
Bronze T-handle/eyescrew
with fine threads,
Tapped for 5/8-11 UNC
threaded ferrule

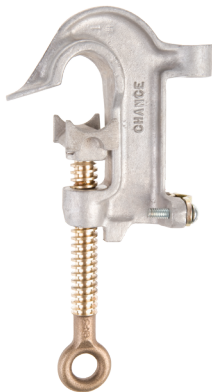


C6001754
Aluminum body,
Smooth jaws,
Bronze eyescrew
with Acme threads,
Tapped for 5/8-11 UNC
threaded ferrule

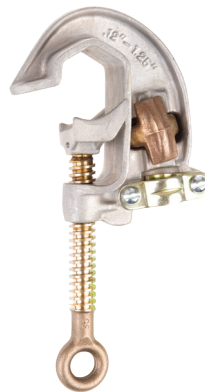

C6002275
Aluminum body,
Smooth jaws,
Bronze eyescrew
with Acme threads,
Bronze pressure-type
terminals



C6002276
Aluminum body,
Serrated jaws,
Bronze eyescrew
with Acme threads,
Bronze pressure-type
terminals

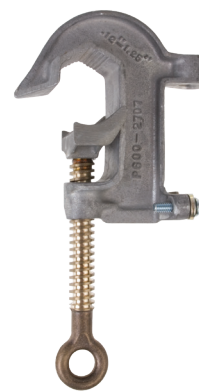

T6002708
Aluminum body,
Serrated jaws,
Bronze eyescrew
with Acme threads,
Tapped for 5/8-11 UNC
threaded ferrule



C6001743
Aluminum body,
Smooth jaws,
Bronze eyescrew
with fine threads,
Tapped for 5/8-11 UNC
threaded ferrule

Catalog Number	C6001959 T6000465 T6000466 T6000790	C6002271	C6001754	C6002275	C6002276	T6002708	C6001743
----------------	--	----------	----------	----------	----------	----------	----------

ELECTRICAL RATINGS

Continuous Current (AMPS)	250	400	350	400	400	400	400
Fault Current - 15 Cycles (AMPS)	21,000	43,000	27,000	43,000	43,000	43,000	43,000
Fault Current - 30 Cycles (AMPS)	15,000	30,000	20,000	30,000	30,000	30,000	30,000

MECHANICAL RATINGS

Recommended Torque (in.-lb.)	200	250	250	250	250	250	250
Main Line Range - Max.	477 kcmil ACSR (0.814")	1033 kcmil ACSR (1.25")	750 kcmil Str. Cu. 636 kcmil ACSR (0.998")	1033 kcmil ACSR (1.25")	1033 kcmil ACSR (1.25")	1033 kcmil ACSR (1.25")	1000 kcmil Cu. 1590 kcmil ACSR (1.50")
Main Line Range - Min.	#6 Sol. Cu. (0.162")	#6 Sol. Cu. (0.162")	#8 Sol. Cu. (0.128")	#8 Sol. Cu. (0.128")	#8 Sol. Cu. (0.128")	#8 Sol. Cu. (0.128")	#6 Sol. Cu. (0.162")
Jumper Range - Max.	1/0 Grd. Cable	4/0 Grd. Cable	2/0 Grd. Cable	4/0 Grd. Cable	4/0 Grd. Cable	4/0 Grd. Cable	4/0 Grd. Cable
Jumper Range - Min.	#2 Grd. Cable	#2 Grd. Cable	#2 Grd. Cable	#2 Grd. Cable	#2 Grd. Cable	#2 Grd. Cable	#2 Grd. Cable
Weight Each	1 1/2 lb. / 0.7 kg.	2 lb. / 0.9 kg.	1 lb. / 0.5 kg.	1 1/4 lb. / 0.6 kg.	1 1/4 lb. / 0.6 kg.	1 1/4 lb. / 0.6 kg.	1 1/2 lb. / 0.7 kg.
ASTM Designation	Type I Class A Grade 2	Type I Class A Grade 5	Type I Class A Grade 3	Type I Class A Grade 5	Type I Class B Grade 5	Type I Class B Grade 5	Type I Class A Grade 5
IEC Ratings							
Jaws	Smooth	Smooth	Smooth	Smooth	Serrated	Serrated	Smooth
Ferrule	Threaded	Threaded	Threaded	Plain Plug	Plain Plug	Threaded	Threaded