

SCREW-IN  
RETROFITS



## SUPERFLEX BOLLARD



SUPERflex →  
switch  
between  
wattages  
& color  
temps

- Switch between 12W, 18W & 24W replacing up to 150W HID.
- Change color temps with a flip of a switch.
- 360° design. Use base up, down or sideways without affecting performance.
- Pretested & potted drivers are burnt in 3x prior to shipping and protected against vibration & moisture.
- Engineered to work efficiently in enclosed fixtures & damp environments, while protecting against insects & dust.
- Dual stage MOV protection.
- USA designed & specified LED driver.
- Lamps dim to XX% by adjusting the wattage switch on the side of the lamp only” (The dimming % is a rounded number of the lowest lumens divided by the highest lumens.)
- Field adjustable light output.

									
	ALSO WORKS ON 208V & 240V	INSTALL METHOD	MEDIUM + MOGUL BASE	MOUNTING	CRI	OPERATING TEMP	DIMMABLE	SURGE PROTECTION	50,000hrs RATED LIFE

PART #	UPC	REPLACES	WATTAGE	LUMENS	FLEXCOLOR	BASE
LED-8029E345-A-FW	84400606067	70W-100W-150W	12W-18W-24W	1550-3360	3000K/4000K/5000K	E26
LED-8029M345-A-FW	84400606068	70W-100W-150W	12W-18W-24W	1550-3360	3000K/4000K/5000K	EX39

🇨🇦 347 VOLT OPTIONS FOR CANADA 🇨🇦

PART #	UPC	REPLACES	WATTAGE	LUMENS	FLEXCOLOR	BASE
LED-8029E345C-A-FW	84400606069	70W-100W-150W	12W-18W-24W	1550-3360	3000K/4000K/5000K	E26
LED-8029M345C-A-FW	84400606070	70W-100W-150W	12W-18W-24W	1550-3360	3000K/4000K/5000K	EX39




LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013  
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949  
 847.380.3540 • led-llc.com

02.23.22 Information is subject to change without notice.



# SUPERFLEX BOLLARD

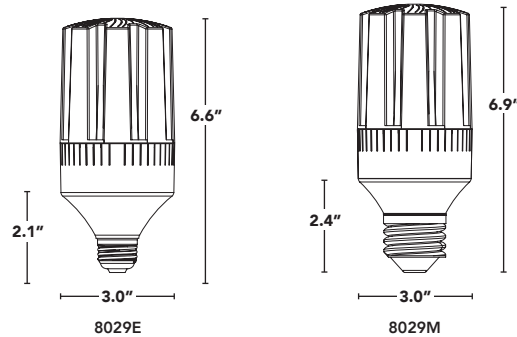

PART #	UPC	REPLACES	WATTAGE	FLEXCOLOR	BASE
LED-8029E345-A-FW	84400606067	70W-100W-150W	12W-18W-24W	3000K/4000K/5000K	E26
LED-8029M345-A-FW	84400606068	70W-100W-150W	12W-18W-24W	3000K/4000K/5000K	EX39

🇨🇦 347 VOLT OPTIONS FOR CANADA 🇨🇦

PART #	UPC	REPLACES	WATTAGE	FLEXCOLOR	BASE
LED-8029E345C-A-FW	84400606069	70W-100W-150W	12W-18W-24W	3000K/4000K/5000K	E26
LED-8029M345C-A-FW	84400606070	70W-100W-150W	12W-18W-24W	3000K/4000K/5000K	EX39

LED-8029E345-A-FW

WATTAGE	CCT	LUMENS
12W	3000K	1550
12W	4000K	1610
12W	5000K	1650
18W	3000K	2450
18W	4000K	2560
18W	5000K	2610
24W	3000K	3170
24W	4000K	3330
24W	5000K	3360

LED-8029M345-A-FW

WATTAGE	CCT	LUMENS
12W	3000K	1550
12W	4000K	1610
12W	5000K	1650
18W	3000K	2450
18W	4000K	2560
18W	5000K	2610
24W	3000K	3170
24W	4000K	3330
24W	5000K	3360