



# T8

## 14.5T8/COR/48-830/MF20/G 10/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.

### Product data

General Information	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
Technical Type	14.5-32W
Light Technical	
Color Code	830 [ CCT of 3000K]
Beam Angle (Nom)	240 °
Luminous Flux (Nom)	2000 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	137.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz

Power (Nom)	14.5 W
Lamp Current (Max)	124 mA
Lamp Current (Min)	58 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
UL Type	Type B - bypass the ballast
Power Factor (Nom)	0.9
Voltage (Nom)	120-277 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	70 °C
Controls and Dimming	
Dimmable	Limited

# T8

## Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1200 mm
Bulb Shape	Tube, double-ended


## Approval and Application

Energy Efficiency Label (EEL)	Not applicable
Energy Saving Product	Yes
Approval Marks	RoHS compliance UL certificate DLC compliance
Energy Consumption kWh/1000 h	- kWh

## Product Data

Order product name	14.5T8/COR/48-830/MF20/G 10/1
EAN/UPC - Product	046677563523
Order code	929002484404
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002484404
Net Weight (Piece)	0.215 kg
Model Number	9290024844


## Dimensional drawing

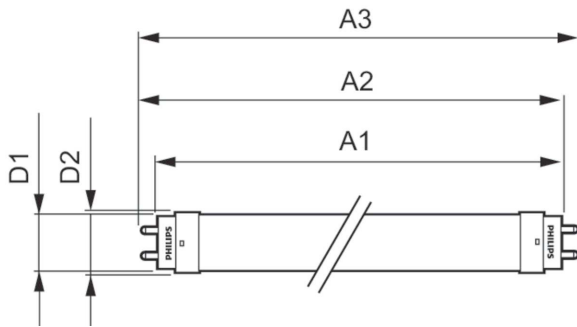


TLED T8 120-277V 14.5-32W 2000lm 3000K

Product	D1	D2	A1	A2	A3
14.5T8/COR/48-830/MF20/G 10/1	25.7 mm	28 mm	1198.2 mm	1205.3 mm	1212.4 mm

## Photometric data

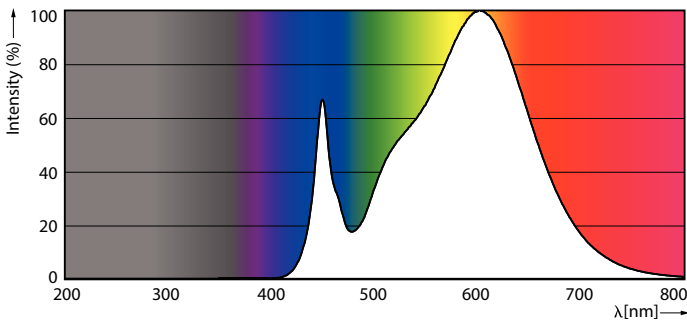


LEDtube COR 12W G13 1700lm 830

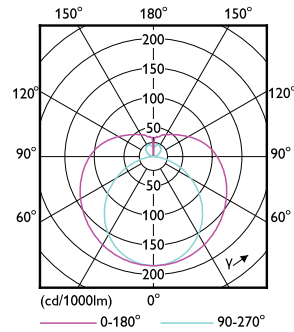

LEDtube COR 9,9W G13 1550lm


Photometric data



© 2021 Philips Lighting B.V. Page 11


LEDtube COR 14,5W G13 2000lm 830

Lifetime

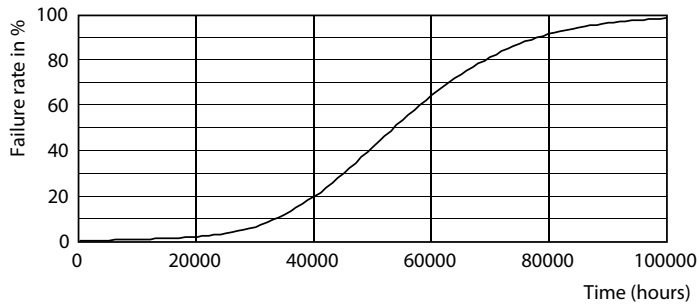

LEDtube 50K-LED

LEDtube 50K FailureRate-LED

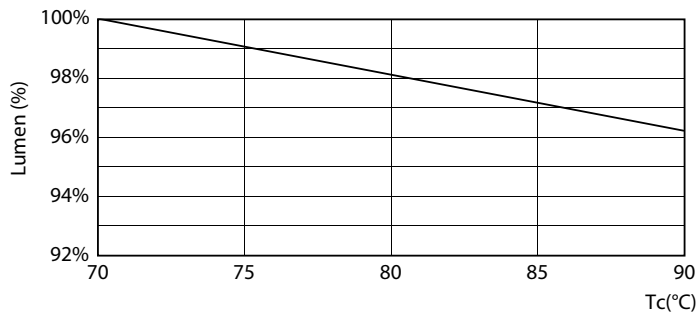

LEDtube COR 9,9W 50K LumenVsTc

LEDtube 50K-LMP

Lifetime



LEDtube 50K LifetimeVsTc-LED

