

T8

14.5T8/COR/48-840/MF21/G 10/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.

Product data

General Information		Power (Nom)	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Power (Nom)	14.5 W
EU RoHS compliant	Yes	Lamp Current (Max)	124 mA
Nominal Lifetime (Nom)	50000 h	Lamp Current (Min)	58 mA
Switching Cycle	50000X	Starting Time (Nom)	0.5 s
Technical Type	14.5-32W	Warm Up Time to 60% Light (Nom)	0.5 s
Light Technical		UL Type	Type B - bypass the ballast
Color Code	840 [CCT of 4000K]	Power Factor (Nom)	0.9
Beam Angle (Nom)	240 °	Voltage (Nom)	120-277 V
Luminous Flux (Nom)	2100 lm	Temperature	
Color Designation	Cool White (CW)	T-Ambient (Max)	45 °C
Correlated Color Temperature (Nom)	4000 K	T-Ambient (Min)	-20 °C
Luminous Efficacy (rated) (Nom)	144.00 lm/W	T-Storage (Max)	65 °C
Color Consistency	<6	T-Storage (Min)	-40 °C
Color Rendering Index (Nom)	80	T-Case Maximum (Nom)	70 °C
LLMF At End Of Nominal Lifetime (Nom)	70 %	Controls and Dimming	
Operating and Electrical		Dimmable	Limited
Input Frequency	50 to 60 Hz		

T8

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1200 mm
Bulb Shape	Tube, double-ended


Approval and Application

Energy Efficiency Label (EEL)	Not applicable
Energy Saving Product	Yes
Approval Marks	RoHS compliance UL certificate DLC compliance
Energy Consumption kWh/1000 h	- kWh

Product Data

Order product name	14.5T8/COR/48-840/MF21/G 10/1
EAN/UPC - Product	046677563547
Order code	929002484604
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002484604
Net Weight (Piece)	0.215 kg
Model Number	9290024846


Dimensional drawing

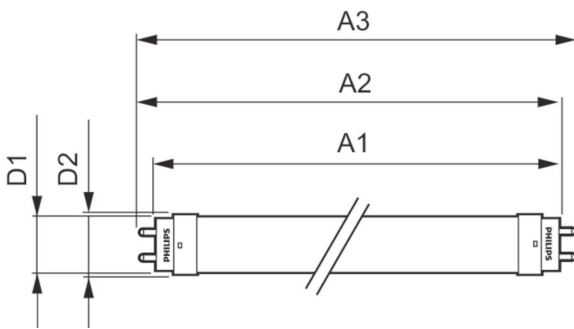


TLED T8 120-277V 14.5-32W 2100lm 4000K

Product	D1	D2	A1	A2	A3
14.5T8/COR/48-840/MF21/G 10/1	25.7 mm	28 mm	1198.2 mm	1205.3 mm	1212.4 mm

Photometric data




LEDtube COR 14,5W G13 2100lm 840




LEDtube COR 9,9W G13 1550lm

Photometric data

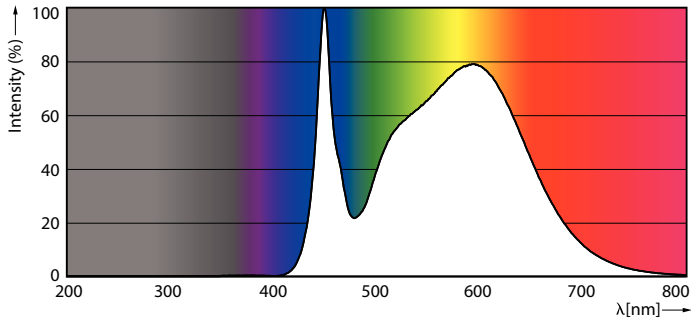

LEDtube COR 9,9W G13 1600lm 840


Lifetime

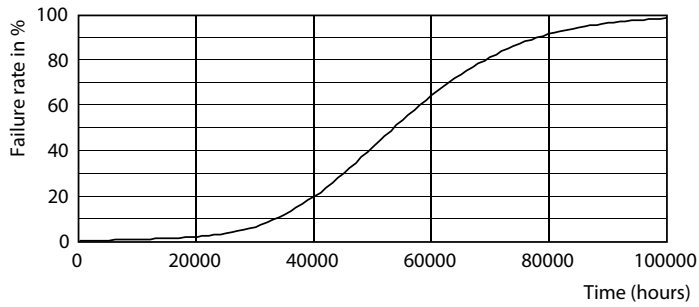

LEDtube 50K-LED



LEDtube 50K FailureRate-LED

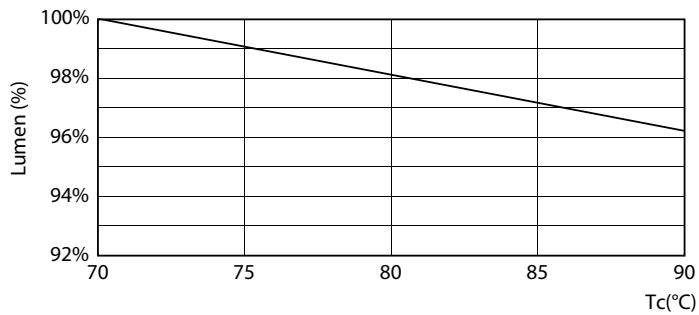

LEDtube COR 9,9W 50K LumenVsTc



LEDtube 50K-LMP

Lifetime



LEDtube 50K LifetimeVsTc-LED

