


LED BACKLIT PANEL



Specification:


Model No.:	Size	Wattage (W)	Efficacy (lm/W)	Color Temp (K)	CRI	Dim solution	Voltage
VO-22W40-120-3Way-B-PX	2x2 ft	40-30-25W	125	3500K 4000K 5000K changeable	Ra>80	1-10V	120-277V
VO-14W40-120-3Way-B-PX	1x4 ft	40-30-25W					
VO-24W50-120-3Way-B-PX	2x4 ft	50-40-30W					
VO-22W40-120-40-B-PX	2x2 ft	40W	125	4000K- 5000K	Ra>80	1-10V	120-277V
VO-14W40-120-40-B-PX	1x4 ft	40W					
VO-24W50-120-50-B-PX	2x4 ft	50W					
VO-22W40-347-3Way-B-PX	2x2 ft	40-30-25W	125	3500K 4000K 5000K changeable	Ra>80	1-10V	120-347V
VO-14W40-347-3Way-B-PX	1x4 ft	40-30-25W					
VO-24W50-347-3Way-B-PX	2x4 ft	50-40-30W					
VO-22W40-347-40-B-PX	2x2 ft	40W	125	4000K- 5000K	Ra>80	1-10V	120-347V
VO-14W40-347-40-B-PX	1x4 ft	40W					
VO-24W50-347-50-B-PX	2x4 ft	50W					

For Model No.

"3Way" represent the selectable power 40W/30W/25W (2x2, 1x4), 50W /40W/30W (2x4) and selectable CCT is 5000K/4000K/3500K


Features:

- No LGP , never yellowing.
- High efficacy up to 125 lm/w, meet DLC 5.1 premium
- 5 Years warranty
- Fast start, no flickering

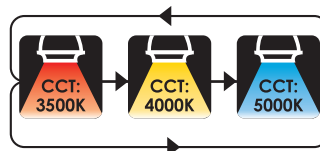

Applications:

- Power Factor: >0.9
- CRI:>80
- Warranty : 5 years




PMMA LENS



SDCM<5



UGR<22




Flicker free




Thicker cooper foil


Dimensions:

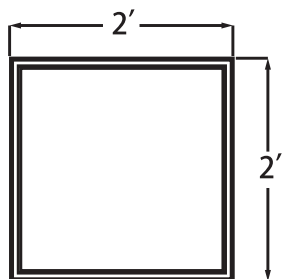

602*602mm

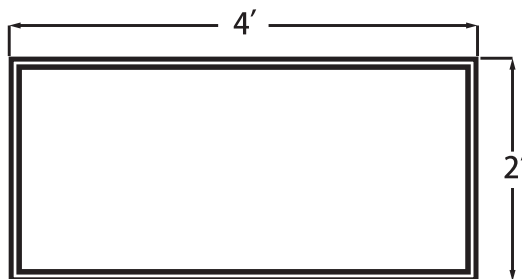

602*1209mm

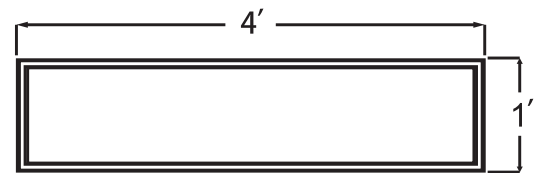

298*1209mm

Installation Accessories:



- Spring Clip



- Suspended Kit



- Surface Mounted Frame