

CONDUIT BODIES • COVERS • GASKETS

Aluminum Die Cast Threaded LB Conduit Bodies for Rigid • IMC conduit



Applications

To provide access to conductors for pulling, splicing and maintenance

Features

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet location

Standard Materials


- Die cast aluminum
- Copper free
- Covers - Stamped aluminum
- Gasket - Neoprene rubber

Applicable Third Party Standards


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA: FB-1
- UL Listed File # E208392



ALBKON



ALB-CGKON



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	INNER PACK	MASTER PACK	WEIGHT PER C
Aluminum Die Cast Threaded LB Conduit Bodies							
ALB1KON	1/2"	4.313	1.313	2.188	10	100	24.3
ALB2KON	3/4"	5.063	1.563	2.438	10	50	37.2
ALB3KON	1"	5.875	1.750	2.750	5	25	46.3
ALB4KON	1-1/4"	7.813	2.500	3.438	2	10	97.7
ALB5KON	1-1/2"	7.813	2.500	3.438	2	10	90.9
ALB6KON	2"	10.063	3.125	4.313	1	5	221.6
ALB7KON	2-1/2"	12.813	4.500	5.313	-	1	365.7
ALB8KON	3"	12.813	4.500	5.813	-	1	429.7
ALB9KON	3-1/2"	15.625	5.563	7.063	-	1	936.9
ALB10KON	4"	15.625	5.563	7.063	-	1	851.4
Aluminum Die Cast Threaded LB Conduit Bodies with Stamped Aluminum Cover & Neoprene Gasket							
ALB1CGKON	1/2"	4.313	1.313	2.438	10	100	30.5
ALB2CGKON	3/4"	5.063	1.563	2.688	10	50	44.6
ALB3CGKON	1"	5.875	1.750	3.000	5	25	56.3
ALB4CGKON	1-1/4"	7.813	2.500	3.688	2	10	116.8
ALB5CGKON	1-1/2"	7.813	2.500	3.688	2	10	110.0
ALB6CGKON	2"	10.063	3.125	4.563	1	5	253.9
ALB7CGKON	2-1/2"	12.813	4.500	5.563	-	1	427.4
ALB8CGKON	3"	12.813	4.500	6.188	-	1	491.4
ALB9CGKON	3-1/2"	15.625	5.563	7.313	-	1	1060.1
ALB10CGKON	4"	15.625	5.563	7.313	-	1	974.6

CONDUIT BODIES • COVERS • GASKETS

Aluminum Die Cast Threaded C Conduit Bodies for Rigid • IMC conduit



Applications

To provide access to conductors for pulling, splicing and maintenance

Features


- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet location

Standard Materials



- Die cast aluminum
- Copper free
- Covers - Stamped aluminum
- Gasket - Neoprene rubber

Applicable Third Party Standards

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA: FB-1
- UL Listed File # E208392



ACKON

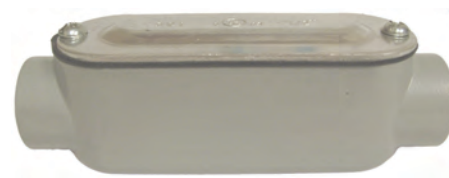

AC-CGKON

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	INNER PACK	MASTER PACK	WEIGHT PER C
Aluminum Die Cast Threaded C Conduit Bodies							
AC1KON	1/2"	4.688	1.375	1.313	10	100	21.3
AC2KON	3/4"	5.500	1.563	1.625	10	50	33.1
AC3KON	1"	6.438	1.750	1.875	5	25	46.3
AC4KON	1-1/4"	8.313	2.500	2.500	2	10	81.9
AC5KON	1-1/2"	8.313	2.500	2.500	2	10	85.0
AC6KON	2"	10.313	3.188	3.375	1	5	187.5
AC7KON	2-1/2"	13.125	4.500	4.000	-	1	325.0
AC8KON	3"	13.188	4.563	4.563	-	1	398.8
AC9KON	3-1/2"	16.125	5.688	5.625	-	1	975.0
AC10KON	4"	16.125	5.688	5.625	-	1	875.0
Aluminum Die Cast Threaded C Conduit Bodies with Stamped Aluminum Cover & Neoprene Gasket							
AC1CGKON	1/2"	4.688	1.375	1.563	10	100	27.5
AC2CGKON	3/4"	5.500	1.563	1.750	10	50	40.5
AC3CGKON	1"	6.063	1.750	2.125	5	25	56.3
AC4CGKON	1-1/4"	8.313	2.500	2.750	2	10	101.0
AC5CGKON	1-1/2"	8.375	2.500	2.750	2	10	104.1
AC6CGKON	2"	10.313	3.188	3.625	1	5	219.8
AC7CGKON	2-1/2"	13.125	4.500	4.250	-	1	386.7
AC8CGKON	3"	13.188	4.563	1.813	-	1	460.5
AC9CGKON	3-1/2"	16.125	5.688	6.000	-	1	1098.2
AC10CGKON	4"	16.125	5.688	6.000	-	1	998.2

CONDUIT BODIES • COVERS • GASKETS

Aluminum Die Cast Threaded LL Conduit Bodies for Rigid • IMC conduit



Applications

To provide access to conductors for pulling, splicing and maintenance

Features


- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet Location

Standard Materials


- Die cast aluminum
- Copper free
- Covers - Stamped aluminum
- Gasket - Neoprene rubber

Applicable Third Party Standards

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA: FB-1
- UL Listed File # E208392



ALLKON



ALL-CGKON

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MASTER PACK	WEIGHT PER C
Aluminum Die Cast Threaded LL Conduit Body for Rigid						
ALL1KON	1/2"	4.313	2.063	1.375	100	24.5
ALL2KON	3/4"	5.063	2.250	1.625	50	36.8
ALL3KON	1"	5.875	2.625	1.875	25	45.2
ALL4KON	1-1/4"	7.813	3.625	2.5	10	97.9
ALL5KON	1-1/2"	7.813	3.625	2.5	10	91.9
ALL6KON	2"	10.603	4.438	3.375	5	245.0
ALL7KON	2-1/2"	12.813	5.750	4	1	387.6
ALL8KON	3"	12.813	5.750	4.5	1	439.2
ALL9KON	3-1/2"	15.625	7.688	5.625	1	923.7
ALL10KON	4"	15.625	7.688	5.625	1	881.8
Aluminum Die Cast Threaded LL Conduit Body with Flat Cover & Gasket						
ALL1CGKON	1/2"	4.313	2.063	1.625	100	30.7
ALL2CGKON	3/4"	5.063	2.250	1.875	50	44.2
ALL3CGKON	1"	5.875	2.625	2.125	25	55.2
ALL4CGKON	1-1/4"	7.813	3.625	2.750	10	117.0
ALL5CGKON	1-1/2"	7.813	3.625	2.750	10	111.0
ALL6CGKON	2"	10.603	4.438	3.625	5	277.3
ALL7CGKON	2-1/2"	12.813	5.750	4.250	1	419.9
ALL8CGKON	3"	12.813	5.750	4.750	1	500.9
ALL9CGKON	3-1/2"	15.625	7.688	5.875	1	1046.9
ALL10CGKON	4"	15.625	7.688	5.875	1	1005.0

CONDUIT BODIES • COVERS • GASKETS

Aluminum Die Cast Threaded LR Conduit Bodies for Rigid • IMC conduit



Applications

To provide access to conductors for pulling, splicing and maintenance

Features


- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet location

Standard Materials


- Die cast aluminum
- Copper free
- Covers - Stamped aluminum
- Gasket - Neoprene rubber

Applicable Third Party Standards

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA: FB-1
- UL Listed File # E208392



ALRKON



ALR-CGKON

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	INNER PACK	MASTER PACK	WEIGHT PER C
Aluminum Die Cast Threaded LR Conduit Bodies for Rigid • IMC conduit							
ALR1KON	1/2"	4.313	2.063	13.375	10	100	22.7
ALR2KON	3/4"	5.063	2.250	1.625	10	50	37.5
ALR3KON	1"	5.875	2.625	1.875	5	25	48.7
ALR4KON	1-1/4"	7.813	3.625	2.500	2	10	98.1
ALR5KON	1-1/2"	7.813	3.625	2.500	2	10	93.9
ALR6KON	2"	10.063	4.438	3.375	1	5	253.5
ALR7KON	2-1/2"	12.813	5.750	4.000	-	1	366.2
ALR8KON	3"	12.813	5.750	4.500	-	1	406.3
ALR9KON	3-1/2"	15.625	7.688	5.625	-	1	928.1
ALR10KON	4"	15.625	7.688	5.625	-	1	901.7
Aluminum Die Cast Threaded LR Conduit Bodies with Stamped Aluminum Cover & Neoprene Gasket							
ALR1CGKON	1/2"	4.313	2.063	1.625	10	100	28.9
ALR2CGKON	3/4"	5.063	2.250	1.875	10	50	44.9
ALR3CGKON	1"	5.875	2.625	2.125	5	25	58.7
ALR4CGKON	1-1/4"	7.938	3.625	2.750	2	10	117.2
ALR5CGKON	1-1/2"	7.938	3.625	2.750	2	10	113.0
ALR6CGKON	2"	10.063	4.438	3.625	1	5	285.8
ALR7CGKON	2-1/2"	12.813	5.750	4.250	-	1	427.9
ALR8CGKON	3"	12.813	5.750	4.750	-	1	468.0
ALR9CGKON	3-1/2"	15.625	7.688	5.875	-	1	1051.3
ALR10CGKON	4"	15.625	7.688	5.875	-	1	1024.9

CONDUIT BODIES • COVERS • GASKETS

Aluminum Die Cast Threaded T Conduit Bodies for Rigid • IMC conduit



Applications

To provide access to conductors for pulling, splicing and maintenance

Features


- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet Location

Standard Materials


Die cast aluminum
Copper free
Covers - Stamped aluminum
Gasket - Neoprene rubber

Applicable Third Party Standards

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA: FB-1
- UL Listed File # E208392

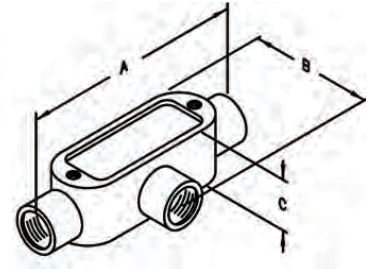

ATKON

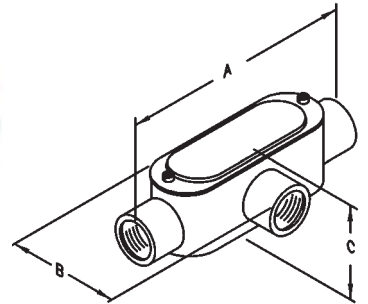

AT-CGKON

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	INNER PACK	MASTER PACK	WEIGHT PER C
Aluminum Die Cast Threaded T Conduit Bodies							
AT1KON	1/2"	4.750	2.063	1.375	10	100	23.2
AT2KON	3/4"	5.563	2.250	1.625	10	50	37.5
AT3KON	1"	6.438	2.625	1.875	5	25	53.3
AT4KON	1-1/4"	8.250	3.563	2.500	2	10	99.9
AT5KON	1-1/2"	8.375	3.563	2.500	2	10	97.6
AT6KON	2"	11.688	4.375	3.125	1	5	264.5
AT7KON	2-1/2"	13.250	5.750	4.000	-	1	374.8
AT8KON	3"	13.250	5.750	4.500	-	1	444.2
AT9KON	3-1/2"	16.125	7.688	5.625	-	1	1146.4
AT10KON	4"	16.125	7.688	5.625	-	1	1079.2
Aluminum Die Cast Threaded T Conduit Bodies with Stamped Aluminum Cover & Neoprene Gasket							
AT1CGKON	1/2"	4.750	2.063	1.625	10	100	29.4
AT2CGKON	3/4"	5.563	2.250	1.875	10	50	44.9
AT3CGKON	1"	6.438	2.625	2.125	5	25	63.3
AT4CGKON	1-1/4"	8.250	3.563	2.750	2	10	119.0
AT5CGKON	1-1/2"	8.375	3.563	2.750	2	10	116.7
AT6CGKON	2"	11.688	4.375	3.625	1	5	296.8
AT7CGKON	2-1/2"	13.250	5.750	4.250	-	1	436.5
AT8CGKON	3"	13.250	5.750	4.750	-	1	505.9
AT9CGKON	3-1/2"	16.125	7.688	5.875	-	1	1269.6
AT10CGKON	4"	16.125	7.688	5.875	-	1	1202.4

CONDUIT BODIES • COVERS • GASKETS

Aluminum Die Cast Threaded TB Conduit Bodies for Rigid • IMC conduit



Applications

To provide access to conductors for pulling, splicing and maintenance

Features

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet Location

Standard Materials

Die cast aluminum

Copper free

Covers - Stamped aluminum


Gasket - Neoprene rubber

Applicable Third Party Standards


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA: FB-1
- UL Listed File # E208392



ATBKON



ATB-CGKON



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	INNER PACK	MASTER PACK	WEIGHT PER C
Aluminum Die Cast Threaded TB Conduit Bodies							
ATB1KON	1/2	4.750	1.375	2.125	10	100	29.1
ATB2KON	3/4"	5.500	1.563	2.675	10	50	42.3
ATB3KON	1"	6.500	1.813	2.750	5	25	58.2
ATB4KON	1-1/4"	8.250	2.438	3.500	2	10	110.3
ATB5KON	1-1/2"	8.250	2.438	3.500	2	10	108.8
ATB6KON	2"	10.500	3.188	4.500	1	5	192.2
Aluminum Die Cast Threaded TB Conduit Bodies with Stamped Aluminum Cover & Neoprene Gasket							
ATB1CGKON	1/2"	4.750	1.375	2.375	10	100	34.8
ATB2CGKON	3/4"	5.500	1.563	2.625	10	50	49.2
ATB3CGKON	1"	6.500	1.813	3.000	5	25	67.7
ATB4CGKON	1-1/4"	8.250	2.438	3.750	2	10	128.4
ATB5CGKON	1-1/2"	8.250	2.438	3.750	2	10	126.9
ATB6CGKON	2"	10.500	3.188	4.750	1	5	222.5

CONDUIT BODIES • COVERS • GASKETS

Aluminum Die Cast Threaded X Conduit Bodies for Rigid • IMC conduit



Applications

To provide access to conductors for pulling, splicing and maintenance

Features

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet Location

Standard Materials


Die cast aluminum
Copper free
Covers - Stamped aluminum
Gasket - Neoprene rubber

Applicable Third Party Standards


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA: FB-1
- UL Listed File # E208392



AXKON



AX-CGKON



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	INNER PACK	MASTER PACK	WEIGHT PER C
Aluminum Die Cast Threaded X Conduit Bodies							
AX1KON	1/2"	4.750	2.688	1.375	10	100	31.4
AX2KON	3/4"	5.500	3.000	1.625	10	50	47.1
AX3KON	1"	6.500	3.500	1.875	5	25	61.9
AX4KON	1-1/4"	8.250	4.500	2.500	2	10	117.7
AX5KON	1-1/2"	8.250	4.500	2.500	2	10	117.9
AX6KON	2"	10.500	5.375	3.375	1	5	212.5
Aluminum Die Cast Threaded X Conduit Bodies with Stamped Aluminum Cover & Neoprene Gasket							
AX1CGKON	1/2"	4.750	2.688	1.625	10	100	37.1
AX2CGKON	3/4"	5.500	3.000	1.875	10	50	54.0
AX3CGKON	1"	6.500	3.500	2.125	5	25	71.4
AX4CGKON	1-1/4"	8.250	4.500	2.750	2	10	135.8
AX5CGKON	1-1/2"	8.250	4.500	2.750	2	10	136.0
AX6CGKON	2"	10.500	5.375	3.625	1	5	242.8

CONDUIT BODIES • COVERS • GASKETS

Aluminum Die Cast Threaded LL and LR Conduit Bodies for Rigid • IMC conduit



Application

To provide access to conductors for pulling, splicing and maintenance

Features


- Tapered threaded hubs - NPT
- Suitable for use in concrete

Standard Materials


Die cast aluminum
Copper free
Steel screws

Applicable Third Party Standards

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA: FB-1
- UL Listed File # E208392

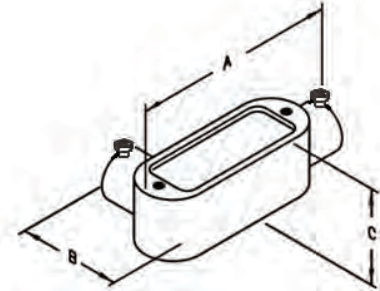

ACLLKON

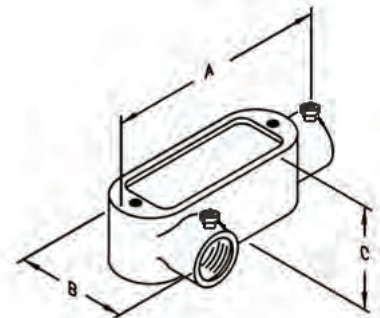

ACLRKON

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	INNER PACK	MASTER PACK	WEIGHT PER C
Aluminum Die Cast Threaded LL Conduit Bodies							
ACLL1KON	1/2"	4.313	2.063	1.375	10	100	24.5
ACLL2KON	3/4"	5.063	2.250	1.625	10	50	36.8
ACLL3KON	1"	5.875	2.625	1.875	5	25	45.2
ACLL4KON	1 1/4"	7.438	3.625	2.500	2	10	97.9
ACLL5KON	1 1/2"	7.813	3.625	2.500	2	10	91.9
ACLL6KON	2"	10.063	4.438	3.375	1	5	245.0

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	INNER PACK	MASTER PACK	WEIGHT PER C
Aluminum Die Cast Threaded LR Conduit Bodies							
ACLR1KON	1/2"	4.313	2.063	1.375	10	100	22.7
ACLR2KON	3/4"	5.063	2.250	1.625	10	50	37.5
ACLR3KON	1"	5.875	2.625	1.875	5	25	48.7
ACLR4KON	1-1/4"	7.813	3.625	2.500	2	10	98.1
ACLR5KON	1-1/2"	7.813	3.625	2.500	2	10	93.9
ACLR6KON	2"	10.063	4.438	3.375	1	5	253.5