

# Rittal – The System.

Faster – better – everywhere.

## **Conductor Terminals** **– SV 3451.500**

Date : May 24, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# Conductor Terminals – SV 3451.500

created: 24.05.2018 build on [www.rittal.com/us-en](http://www.rittal.com/us-en)

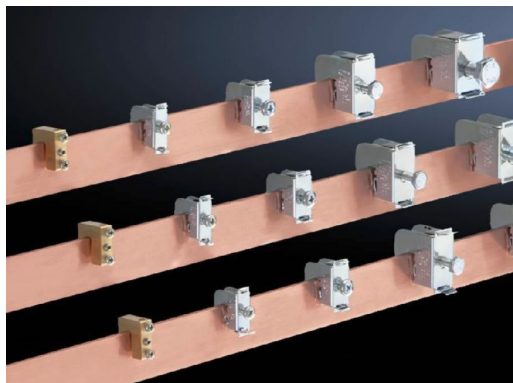

## Product description

**Description:** For connecting round conductors and laminated copper bars.

**Material:** Carbon steel

**Surface finish:** Zinc-plated, passivated

**Note:** Wire end ferrules should be used with fine stranded wire conductors.

## Product features

**Suitable for busbars:** Cross-section (thickness): 5 mm

**Clamping area for laminated copper bars:** Height: 8 mm  
Width: 8 mm (0.31 ")

**Connection for round conductor cross-sections:** 2,5 mm<sup>2</sup> - 16 mm<sup>2</sup>

**Packaging unit:** 15 pc(s).

**Weight/packaging unit:** 0.42 kg (0.9 lb.)

**EAN:** 4028177042681

**Customs tariff number:** 85369010

**ETIM 6.0:** EC000001

<b>ETIM 5.0:</b>	EC000001
<b>eCl@ss 8.0/8.1:</b>	27141146
<b>eCl@ss 7.0/7.1:</b>	27141146
<b>eCl@ss 6.0/6.1:</b>	27141146
<b>eCl@ss 5.1/5.1.4:</b>	27370302
<b>Product description (long):</b>	SV Conductor connection clamp, 2,5-16 mm <sup>2</sup> , clamping area WH: 8x8 mm, for bar thickness 5 mm
<b>Approvals</b>	
<b>Approvals:</b>	C-UR UR
<b>Certificates:</b>	EAC
<b>Declarations:</b>	Declaration of conformity