

Rittal – The System.

Faster – better – everywhere.

Circuit-Breaker Component Adaptors 3-pole – SV 9345.600

Date : May 29, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Circuit-Breaker Component Adaptors 3-pole – SV 9345.600

created: 29.05.2018 build on www.rittal.com/us-en

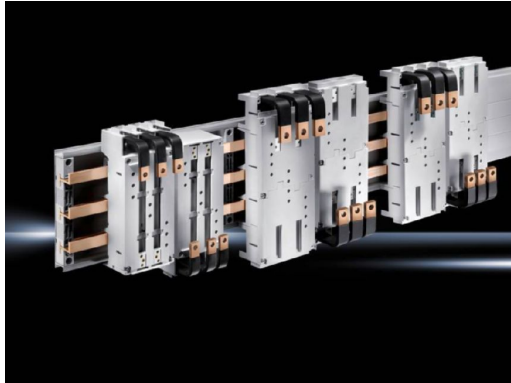

Product description

Material:	Polyamide (PA 6.6) Fire protection corresponding to UL 94-V0
Color:	RAL 7035
Supply includes:	Connection straps Sliding Blocks
Note:	Cable outlet: Switch outlet or as outgoing cable from the switchgear The technical data may vary for UL applications.

Product features

Suitable for busbars:	with cross-section height: 5 mm with cross-section height: 10 mm
Number of poles:	3-pole
For bar systems with center-to-center spacing:	60 mm
Dimensions:	Height: 240 mm (9.4 ") Width: 105 mm (4.1 ")
Rated operating voltage:	690 V, 3~
Rated current (max.):	250 A

Cable outlet:	Top
To fit manufacturer (model):	ABB (S3, T3, T4/320 A, T3 UL, T4 UL, XT3, XT4) Allen Bradley (140 U-J) Eaton (NZM2, NZM2 UL, BZM B2) GE (FE160, FE250, FD160) Legrand (DPX 250) Mitsubishi (NF125-SGW/HGW, NF160-SGW/HGW) OEZ (BD250N, BD250S) Schneider Electric (NS(X)100, NS(X)160, NS(X)250, GV7, NSF150, NSF250) Schrack (MC2) Siemens (VL150(X) UL, VL160(X), VL250, VL250 UL, 3RV10 63, 3RV13 63, 3RV13 64, 3VT2, 3VA12/20/21/22, 3VA52/61/62) Terasaki (H125, L125, H160, L160, S160, E250, H250, L250)
Packaging unit:	1 pc(s).
Weight/packaging unit:	1.51 kg (3.3 lb.)
EAN:	4028177679962
Customs tariff number:	85369095
ETIM 6.0:	EC001531
ETIM 5.0:	EC001531
eCl@ss 8.0/8.1:	27370304
eCl@ss 7.0/7.1:	27400613
eCl@ss 6.0/6.1:	27400613
eCl@ss 5.1/5.1.4:	27370302
Product description (long):	SV Circuit-breaker component adaptor, 250 A, 690 V, 3-pole, cable outlet top, with connection straps
Approvals	
Approvals:	ABS DNV-GL UL + C-UL
Certificates:	EAC
Declarations:	Declaration of conformity