

LED FIXTURE

RIGID Series




LED Backlit Panel RGD-BLP5

Ultra slim LED backlit panel luminaire with the latest options,
Multiple Wattage - Multiple Kelvin, 120-347V auto-sensing driver



5-year limited warranty

Operating temperature range -25 °C ~ +45 °C




For recessed grid ceiling installations, our mounting clips may be used to securely mount the RGD-BLP5 luminaire to the T-Bar frame or as to act as suspension points.

Features & Benefits

- cULus listed, 125lm/W
- Multiple Wattage and Multiple Kelvin (CCT)
- 3 Convenient sizes (1'x4', 2'x4', 2'x2'), no UV & IR emission
- 120-347V auto-sensing driver, PF >0.9
- L70 @ 54,000 Hrs, CRI ≥80
- 0-10V Dimmable
- Aluminum body, 100°+ beam angle
- Damp location / IC rated

Dimensional Drawing

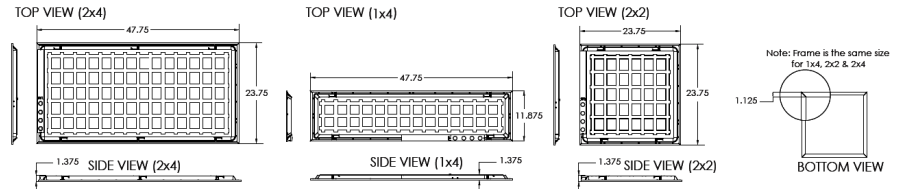

	L	W	H
2'x2'	23.75"	23.75"	1.38"
1'x4'	47.75"	11.88"	1.38"
2'x4'	47.75"	23.75"	1.38"

Ordering Information Example: RGD-BLP5/22/MW/MK/120-347/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable	Option
RGD (Rigid)	BLP5 (LED Backlit panel)	22 (2'x2') 14 (1'x4') 24 (2'x4')	MW (Multiple Wattage)	MK (Multiple Kelvin)	120-347V	D (0-10V dimmable)	S (Sensor) EM (Emergency BU)

Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Beam Angle	Initial Delivered Lumens (Lumen)	CCT (K)	CRI	Damp Location	Case QTY.
3680317	RGD-BLP5/22/MW/MK/120-347/D	36-30-25W	120-347V	54,000	110	4500-3750-3125	35-40-50	>80	Yes	2
3680318	RGD-BLP5/22/S/MW/MK/120-347/D	30-25-21W	120-347V	54,000	110	3750-3125-2625	35-40-50	>80	Yes	2
3680319	RGD-BLP5/14/MW/MK/120-347/D	30-25-21W	120-347V	54,000	110	3750-3125-2625	35-40-50	>80	Yes	2
3680320	RGD-BLP5/24/MW/MK/120-347/D	45-40-36W	120-347V	54,000	110	5625-5000-4500	35-40-50	>80	Yes	2
3660203	RGD-BLP5/EM/RACK	Rigid backlit5 panel EM rack, holds emergency driver and battery packs*								
3660204	RGD-BLP5/EM/DRIVER	Rigid backlit5 panel emergency driver pack*								
3660205	RGD-BLP5/EM/BATTERY	Rigid backlit5 panel emergency battery pack*								
3660148	RGD-BLP/22/FRM/WH	Rigid backlit panel surface mount frame 2x2								
3660149	RGD-BLP/14/FRM/WH	Rigid backlit panel surface mount frame 1x4								
3660150	RGD-BLP/24/FRM/WH	Rigid backlit panel surface mount frame 2x4								
3660151	RGD-BLP/SUSP	Rigid backlit panel suspension kits, (2 10' AC cable hangers per kit)								

* All 3 items required for proper ordering sequence.

