


Eaton D4PR11A

Catalog number: D4PR11A

Eaton D4 Series General Purpose Plug-In Relay, QTY: 1, 120V coil, SPDT contact configuration, 10 A, 250 Vac/30 Vdc resistive load, 7.5A, 250 Vac/5 A, 30 Vdc inductive full load, 380 Vac/125 Vdc max. operating voltage

General specifications

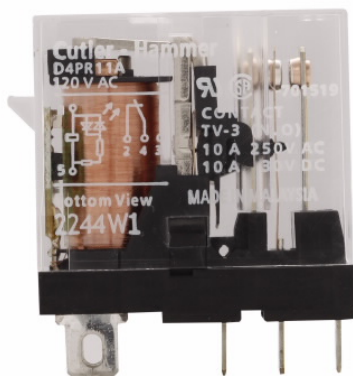

Product Name

Eaton General-purpose relay

Catalog Number

D4PR11A

UPC

782114160213

Product Length/Depth

1.14 in

Product Height

1.14 in

Product Width

.51 in

Product Weight

.05 lb

Warranty

Eaton Selling Policy 25-000, one (1) year from the date of installation of the Product or eighteen (18) months from the date of shipment of the Product, whichever occurs first.

Compliances

CE Marked RoHS Compliant

Certifications

UL Listed file E65657 CSA file No. LR701519 UL Listed file E1491 cRUus

Catalog Notes

Indicator lamp available. Consult sales office or customer support center for additional coil voltages.

defaultTaxonomyAttributeLabel

Contact configuration

SPDT

Coil voltage

120 V

Series

D4

Inductive full load

7.5 A at 250 Vac, 5 A at 30 Vdc

Quantity

1

Amperage Rating

10A

Voltage - max

380 Vac/125 Vdc

Indicators

Indicating light

Resistive load

10 A, 250 Vac, 30 Vdc

Resources

Catalogs

[Eaton's Volume 7—Logic Control, Operator Interface and Connectivity Solutions](#)

Drawings

[D4_R1 2D PDF](#)

[D4_R1 2D Drawing Xchange](#)

[D4_R1 AutoCAD 2D Footprint](#)

[D4_R1 3D Inventor](#)

[D4_R1 3D Model Xchange](#)

[D4_R1 AutoCAD 2D Footprint \(mm\)](#)

Specifications and datasheets

[Eaton Specification Sheet - D4PR11A](#)



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2022 Eaton
All Rights Reserved

Eaton is a registered trademark.

All other trademarks are
property of their respective
owners.



[Eaton.com/socialmedia](https://www.eaton.com/socialmedia)