


Eaton XTCEXFACC22

Catalog number: XTCEXFACC22

Contactor Accessory - Auxiliary Contact, Four-pole, Spring cage terminals, 2NO-2NC contact configuration, 16A conventional thermal rating, 6A at 220/230/240V, 3A at 380/400/415V, 1.5A at 500V rated operational voltage, Front mounting,

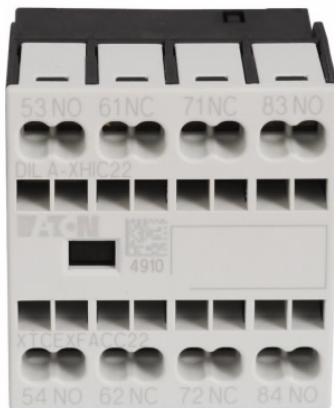

General specifications

Product Name	Catalog Number
Eaton motor control auxiliary contact	XTCEXFACC22
EAN	Product Length/Depth
4015082765323	1.5 in
Product Height	Product Width
1.5 in	2 in
Product Weight	Warranty
.05 lb	Not Applicable
Compliances	Certifications
CE Marked CCC Marked ATEX Compliant	IEC 60947 EN 60947 UL Listed CSA Certified

Catalog Notes

Interlocked opposing contacts, to IEC/EN 60947-5-1 Annex L (positively driven), within the auxiliary contact modules (not NOE and NCL contacts) and between the auxiliary contacts and built-in contacts of the XTRE control relays.

defaultTaxonomyAttributeLabel

Contact configuration

2 NO-2 NC

Type

Contactory Accessory - Auxiliary Contact

Used with

XTRE control relays

Quantity

5

Terminals

Spring cage

Mounting method

Front

Rated operational current

6A at 220/230/240V; 3A at 380/400/415V; 1.5A at 500V

Conventional thermal current

16A

Number Of Poles

Four-pole

Resources

Catalogs

[Eaton's Volume 5—Motor Control and Protection](#)

Specifications and datasheets

[Global Data Sheet - XTCEXFACC22](#)

[Eaton Specification Sheet - XTCEXFACC22](#)



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2022 Eaton
All Rights Reserved

Eaton is a registered trademark.

All other trademarks are
property of their respective
owners.



[Eaton.com/socialmedia](https://www.eaton.com/socialmedia)