

QuickPort® Round Floor Jack Inserts & Assemblies

APPLICATION

Rugged and fully field-configurable, this device provides point-of-use connectivity for a broad range of applications where convenience or building requirements dictate the use of a floor-mounted communications outlet. Each floor plate is made of .06" thick solid brass to hold up under heavy furniture or foot traffic. When not in use, a flush-fitting brass screw cap keeps internal components free from dirt and dust. The two individual ports are configured easily with any combination of QuickPort Snap-in Modules. QuickPort floor jacks will fit standard metal boxes 3" x 2", 3" x 2 1/8" and larger.



FEATURES

- Satin finish on brass floor plate & screw cap
- Flush-fitting brass screw cap keeps internal components free from dirt and dust when not in use
- Accepts all UTP & A/V QuickPort Snap-in Modules

DESIGN CONSIDERATIONS

- Use where a floor-mounted communications outlet is required
- Floor Jack assemblies will fit standard metal boxes 3" x 2", 3" x 2 1/8" and larger
- Durable brass floor plate withstands heavy furniture or foot traffic
- Available in single gang only
- Put blanks (PN# 41084-08*) in unused ports for future expansion

STANDARDS COMPLIANCE

Meets or exceeds all applicable standards: UL Listed; CSA Certified; Complies with NEC® Article 800 and TIA/EIA-568-B; and meets FCC Part 68.

PHYSICAL SPECIFICATIONS

Dimensions: 2.75"W x 4.5"H x 1.66" D (loaded)
Materials: High-impact, fire-retardant plastic rated UL 94V-0
Capacity: 1-2 ports

INSTALLATION NOTES

Detailed installation instructions are included in the carton

WARRANTY INFORMATION


For a copy of Leviton product warranties, visit www.leviton.com.

SPECIFICATION

The floor jack assembly shall be a field configurable NEMA-style housing that mounts flush in standard single gang NEMA boxes. It shall provide 2 ports which are field configurable with a variety of UTP & A/V QuickPort snap-in modules. Shall be constructed of high-impact, fire-retardant plastic rated UL 94V-0, and be UL Listed, CSA Certified, and compliant with FCC Part 68 and TIA/EIA-568-B specifications. Floor plate and screw cap finish shall be satin brass. Inserts shall be ivory in color.

ELECTRONIC FILES

For CAD files, Typical specs, or Dimensional Line Art. (.DXF, .DWG, MS-DOS.eps or .TXT), visit www.leviton.com.

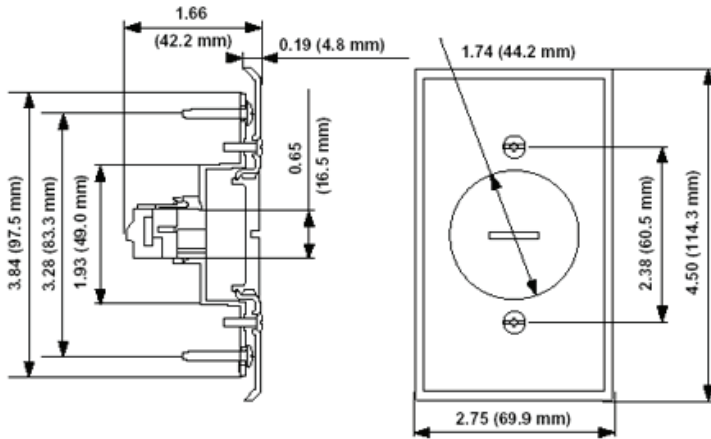

41650-00x 42652-0xx

PART NUMBERS

Description	Part No.
Floor plate assembly with one F-connector, one blank module	41650-00F
Floor plate assembly with one 6P6C connector, one blank module	41650-006
Floor plate assembly with one blank module	41652-000
Floor plate assembly with two 6P6C connector	41652-006
Floor plate assembly with one 6P6C connector, one F-connector	41652-06F



Leviton Network Solutions 2222 - 222nd St. SE Bothell, WA 98021-4416 tel 1-800-824-3005 tel +1-425-486-2222 appeng@leviton.com www.leviton.com	Asia / Pacific T +1.631.812.6228 E infoasean@leviton.com	Canada T +1.514.954.1840 E pcservice@leviton.com	Caribbean T +1.954.593.1896 E infocaribbean@leviton.com	China T +852.2774.9876 E infochina@leviton.com	Colombia T +57.1.743.6045 E infocolombia@leviton.com
	Europe T +44.0.1592.772124 E customerserviceeu@leviton.com	India / SAARC T +971.4.886.4722 E infoindia@leviton.com	Mexico T +52.55.5082.1040 E lsamarketing@leviton.com	Middle East & Africa T +971.4.886.4722 E lmeinfo@leviton.com	South Korea T +82.2.3273.9963 E infokorea@leviton.com