

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

TRADITIONAL RECESSED

ORDERING INFORMATION

Order code: 63232
Model number: RF4in/REMOD/IC/E26/STD
UPC: 069549632325
Case quantity: 6
Remodeler kit: 63474 K/RF4/PAR20/GMB/WH/LED/STD

PHYSICAL DATA

Type: Remodeler IC¹/Non-IC²
Housing material: Industrial-strength galvanized steel
Can diameter in. (mm): 4 (102)
Opening diameter in. (mm): 4 1/4 (108)
Socket: E26

PERFORMANCE DATA

Compatible lamp: PAR20, PAR16 MR16
Volts (V): 120
Thermal protection: Yes
Junction box: Yes
Push-in connectors: Yes

INSTALLATION

- Screw-in mounting system
- Permits the installation in ceilings up to 1 1/4 in. in thickness
- Suitable for double drywall application
- Wire to wire connectors
- Clamp behind the knock-outs secures the residential cable safely in place which means there is no need for a grommet.

CAUTIONS

- Turn power off before inspection, installation, or removal
- Risk of electric shock – do not use where directly exposed to water or weather
- Risk of fire. Blinking light of this thermally protected fixture may indicate overheating
- Minimum 90 °C supply conductor
- If used with halogen lamp: do not install insulation within 3 in. (76 mm) of any part of the fixture
- May be interconnected using the same circuit
- Use with STANDARD trims only
- Not to be used with blow-in type insulation

In addition to the regular CSA certification for use in non-insulated ceilings (non-IC) applications, this model has been CSA certified to be installed in insulated ceilings (IC) applications when used with an appropriate LED lamp.
 This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Max. of 4 no. 12 AWG through branch circuit conductor suitable for 90°C permitted in box.
 For complete warranty information please visit www.standardpro.com



1
yr
warranty

**quick
ship**

**6
damp
location**

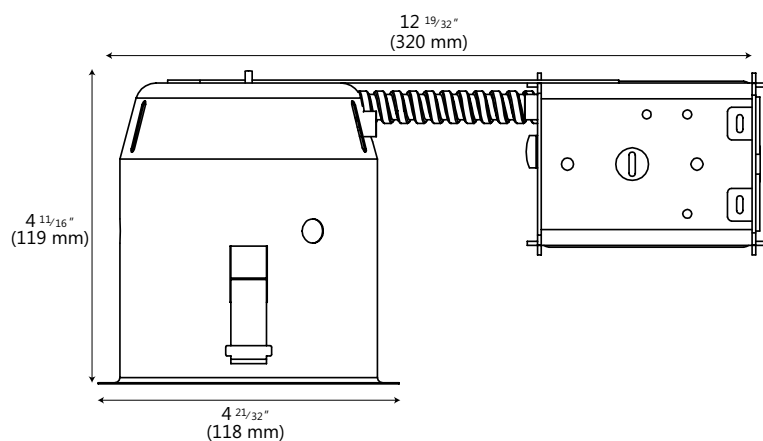
9w
maximum
per lamp

50w
maximum
per lamp



COMPATIBLE LAMPS AND TRIMS

Compatible lamps	Max Wattage (W)	Compatible STANPRO trims
Halogen or LED PAR20	35	62737, 62739, 62741
	50	62705, 62709, 62713, 62717, 62721, 62742, 62743, 62744, 62749, 62750, 62751, 62752, 62753
Halogen or LED PAR16 MR16 (E26)	35	62730, 62731, 62732, 62733, 62734, 62735, 62736, 62738, 62740
	50	62704, 62706, 62708, 62712, 62716, 62718, 62720, 62722, 62723, 62724, 62725, 62754, 62755, 62756

DIMENSIONS


Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.