

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# LED TAPE

## LOW VOLTAGE TAPE

### 24 V

### ORDERING INFORMATION

**Order code:** 65893  
**Description:** TAPE/16.4'/2.9W/30K/24V/IP67/120/8MM/STD  
**UPC:** 069549658936  
**Case quantity:** 25

### PHYSICAL DATA

**Reel Total Length:** 16.4 ft. (5 m)  
**Jacketed or Unjacketed:** Jacketed  
**Wire gauge:** 22 AWG  
**Number of LEDs:** 120 LEDs per meter  
 37 LEDs per foot  
**Cuttable length:** 2 in. (50 mm) or every 6 LED chips  
**Maximum run length:** 33 ft. (10 m)  
**Operating Temperature:** -25°C / -13°F to 40°C / 104°F

### PERFORMANCE DATA

**Volts (V):** 24  
**Color temperature (K):** 3 000 (Neutral white)  
**Watts per length:** 48 W per reel  
 9.6 W per meter  
 0.24 W per inch  
**Light output per length:** 3 045 lm per reel  
 609 lm per meter  
 15 lm per inch  
**Efficacy (lm/W):** 63  
**CRI:** 90+  
**Life (hrs):** 50 000  
**Beam angle (°):** 120

<sup>1</sup> Typical Color temperature range: +/- 5 %

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 5 %

<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

Extrusions, drivers and accessories are available (sold separately).  
 This LED Tape is also available in IP22.



**3<sup>yrs</sup>**  
**warranty**

  
 dimmable


  
 IP  
 67

  
 wet  
 location

  
 LISTED

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
 Data is based upon tests performed in a controlled environment.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

## DIMENSIONS

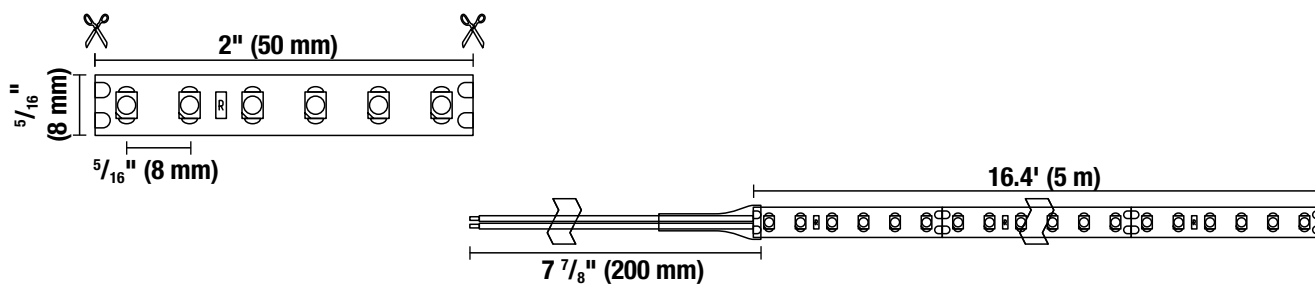

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.