

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LED TAPE

LOW VOLTAGE TAPE

12 V

ORDERING INFORMATION

Order code: 65895
Model number: TAPE/16.4'/1.5W/30K/12V/IP22/60/8MM/STD
UPC: 069549658950
Case quantity: 25

PHYSICAL DATA

Reel Total Length: 16.4 ft. (5 m)
Jacketed or Unjacketed: Unjacketed
Wire gauge: 22 AWG
Number of LEDs: 60 LEDs per meter
 18 LEDs per foot
Cuttable length: 2 in. (50 mm) or every 3 LED chips
Maximum run length: 41 ft. (13 m)
Operating Temperature: -25°C / -13°F to 40°C / 104°F

PERFORMANCE DATA


Volts (V): 12
Color temperature (K): 3 000 (Neutral white)
Watts per length: 24 W per reel
 4.8 W per meter
 0.12 W per inch
Light output per length: 1 800 lm per reel
 360 lm per meter
 9 lm per inch
Efficacy (lm/W): 75
CRI: 90+
Life (hrs): 50 000
Beam angle (°): 120

¹ Typical Color temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 5 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

Extrusions, drivers and accessories are available (sold separately).
 Custom lengths available upon request. Ask your sales representative for more information.

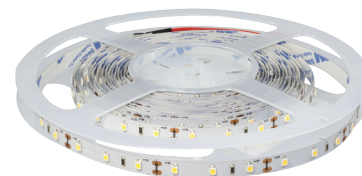

3_{yrs}
warranty




dimmable



dry
 location



DIMENSIONS

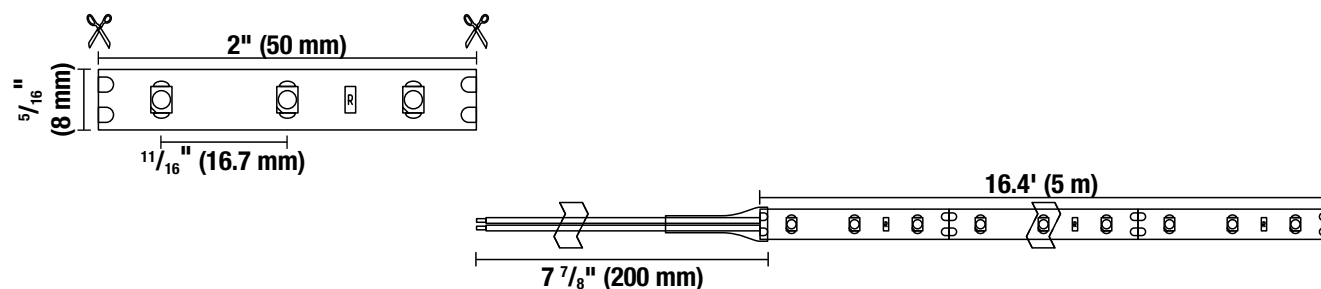

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.