

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

PFL

LED BATTERY POWERED FLOOD LIGHT

USB Outlet for Smartphone Charging

3 Pre-Set Light Intensities

ORDERING INFORMATION

Order code: 67021
Model number: PFL/BTRY/100-240/20W/CW/YL/STD
UPC: 069549670211
Case quantity: 8

PHYSICAL DATA

Housing color: Yellow
Housing material: Aluminum

PERFORMANCE DATA

Watts (W): 20
Volts (V AC): 100-240
Color temperature (K)¹: Cool White
Lumen output (lm)²: 1 100
Efficacy (lm/W): 55
CRI: 70
Battery working time (h):
 20% Brightness: 12
 50% Brightness: 6
 100% Brightness: 3
Battery charging time (h): 5
Beam angle (°): 120
Amperage (A): 4.4
Battery specifications: 7.4 V 4.4 AH
Operating temp. range: -10°C to 40°C (14°F to 104°F)
Dimming: 3 pre-set light Intensities

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

ACCESSORIES (order separately)

Order code	Type
67024	20 W replacement battery
67025	Tripod
67026	20 W replacement battery charger



3
 yrs
 warranty


**quick
 ship**

**LED
 fixture**

**dry
 location**

IK10

DIMENSIONS AND WEIGHT

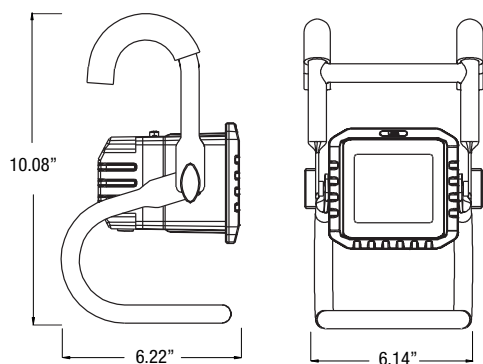

Net weight (lbs)	4.85
------------------	------

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.