

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

WPS GEN 4

CLASSIC WALL PACK

Selectable color temperature (3 000/4 000/5 000 K)

Power selectable

Integrated Photocell

Multi-Voltage (120-347 V)

ORDERING INFORMATION

Order code: 68314
Model number: WPS-PS40-Q-3C
UPC: 069549007307
DLC unique ID: PLW61NEJG50K
Case quantity: 1

PHYSICAL DATA

Dimensions: 14.37" x 9.33" x 7.36" (365 mm x 237 mm x 187 mm)
Housing material: Aluminium die-cast
Lens Material: Prismatic tempered glass lens
Photocell: Some of the configurations comes with a button type photocell that can be turned off by using the internal switch if needed

PERFORMANCE DATA

Watts (W): 25/30/40
Volts (VAC): 120 - 347
Colour temperature (K)¹: 3 000/4 000/5 000
Lumen output (lm)²: 3 580 - 5 606
Efficiency (lm/W): 140 - 150
CRI: >80
Finish: Bronze
Photocell: Yes
Dimming (Yes/No): Yes
LED current (mA) 850
Power factor: 0.90
THD (%): 20
Operating temp. range: -40°C to 50°C

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %


COMPATIBLE ACCESSORIES

Order code	Description
68370	18" Bronze metal backplate
68371	Bronze glareshield
68372	Stainless Steel wireguard




Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.

DIMENSIONS

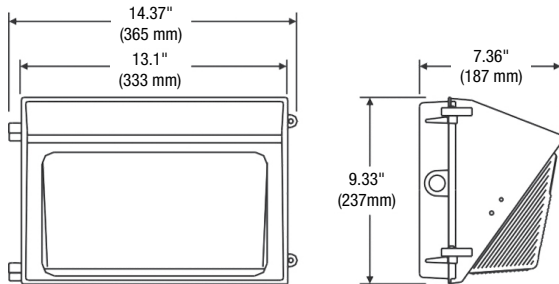


SELECTABLE COLOR TEMPERATURE AND ON/OFF INTEGRATED PHOTOCELL

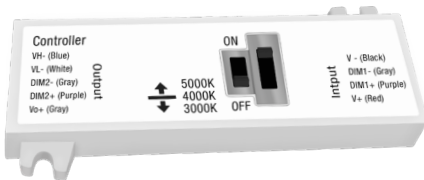

POWER SELECTABLE


Power Selection	Order code	
	68314	68315
1	25 W	60 W
2	30 W	80 W
3	40 W	100 W



PHOTOMETRIC DATA¹

68314 • WPS-PS40-Q-3C • 5 403.5 lm

Polar candela distribution

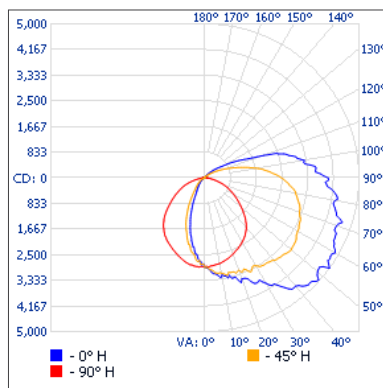

Zonal lumen summary

Zone	Lumens	% Lamp
0-30	820.9	15.2%
0-40	1 349.6	25%
0-60	2 629.8	48.7%
60-90	1 784.2	33%
70-100	1 564.6	29%
90-120	874.9	16.2%
0-90	4 414.1	81.7%
90-180	989.5	18.3%
0-180	5 403.5	100%

Illuminance at a distance

Center beam fc		Beam width	
8.3'	16.2	25.7'	22.2'
16.7'	4.00	51.8'	44.7'
25.0'	1.79	77.5'	66.9'
33.3'	1.01	103.2'	89.1'
41.7'	0.64	129.2'	111.6'
50.0'	0.45	155.0'	133.8'

■ Vert. spread: 114.3°
■ Horiz. spread: 106.4°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.