



DVAKSX-LED14

Ceiling Mount LED Vapourproof



IDEAL APPLICATIONS

- ✓ Entrances
- ✓ Stairways
- ✓ Elevator Shafts
- ✓ Restaurants
- ✓ Tunnels
- ✓ Service Areas

DESCRIPTION:

The DVAKSX-LED14 is a versatile fixture that can be used in industrial and architectural applications. The fixture is available in custom colors and has a variety of globe and guard accessories.

FEATURES:

- Sleek, modern look with the same ruggedness as the original DVAKS fixture.
- 10 minute retrofit. Ret ofits o existing 4" round/octagon boxes.
- Polycarbonate lens can be easily replaced with glass globe and guard to provide a different look.
- Precision die cast aluminum housing with powder coat paint finish for industrial and a chitectural applications.
- Grey polyester powder coat paint finish for p otection against oxidization
- Five 1/2" NPS conduit entries.

Note: Not for use in hazardous locations.

SPECIFICATIONS

DVAKSX-LED14

Watts	13.6W
Lumens	1644 Lm
Efficacy	120.5 Lm/W
Voltage	120-277V
Replaces Up To	100W Incandescent / 36W CFL Vaporproof Fixture
Colour Temp	3000K, 4000K, 5000K*
Dimming	0-10V Dim to Off
PF*	0.96
CRI	83
LED Life (L70)	>54000 Hours
Housing Material	Aluminum
Lens	Frosted Polycarbonate Lens
Mounting	Ceiling Mount
Certifications	ETL, Wet Locations, DLC

Note: Specs shown are for 5000K, 120V



ACCESSORIES

RAB Design carries a diverse line of durable and cost efficient glass globes. They come in various finishes, which include impregnated colors.

GLASS GLOBES OPTIONS (SOLD SEPARATELY)



GL100
CLEAR GLASS



GL100HR
HEAT RESISTANT



GL100RIB
RIBBED GLASS



GL100SB
SANDBLASTED



RGL100A
AMBER



RGL100B
BLUE




RGL100G
GREEN



RGL100R
RED

GD100CGS CAST GUARD (SOLD SEPARATELY)

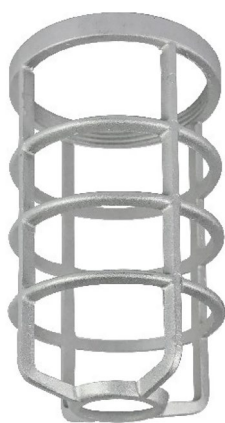

FEATURES

- Heavy duty raw/painted cast guard for use with RAB Design Vapourproof fixtures.
- Machined threads for smooth fit to RAB Design fixtures.
- Set screw to lock guard securely to fixture.



DVAKSX-LED14 shown with GD100CGS Cast Guard and GL100SB Sandblasted Globe.


SPECIFICATIONS

Model Number	Voltage (V)	Power (W)	Light Output (lm)	Efficacy (lm/W)	THD (%)	PF	CCT (K)	CRI
DVAKSX-LED14-B-3K-DGY-DIM-FR-CM	120-277	13.51	1590	117.7	11.3	0.95	3000	84
DVAKSX-LED14-B-4K-DGY-DIM-FR-CM	120-277	13.58	1617	119.1	10.2	0.96	4000	84

LEGEND

B - 120-277V
 3K - 3000K, 4K-4000K
 DGY - Dove Gray
 DIM - 0-10V Dimming
 FR - Frosted Lens
 CM - Ceiling Mount

DIMENSIONS

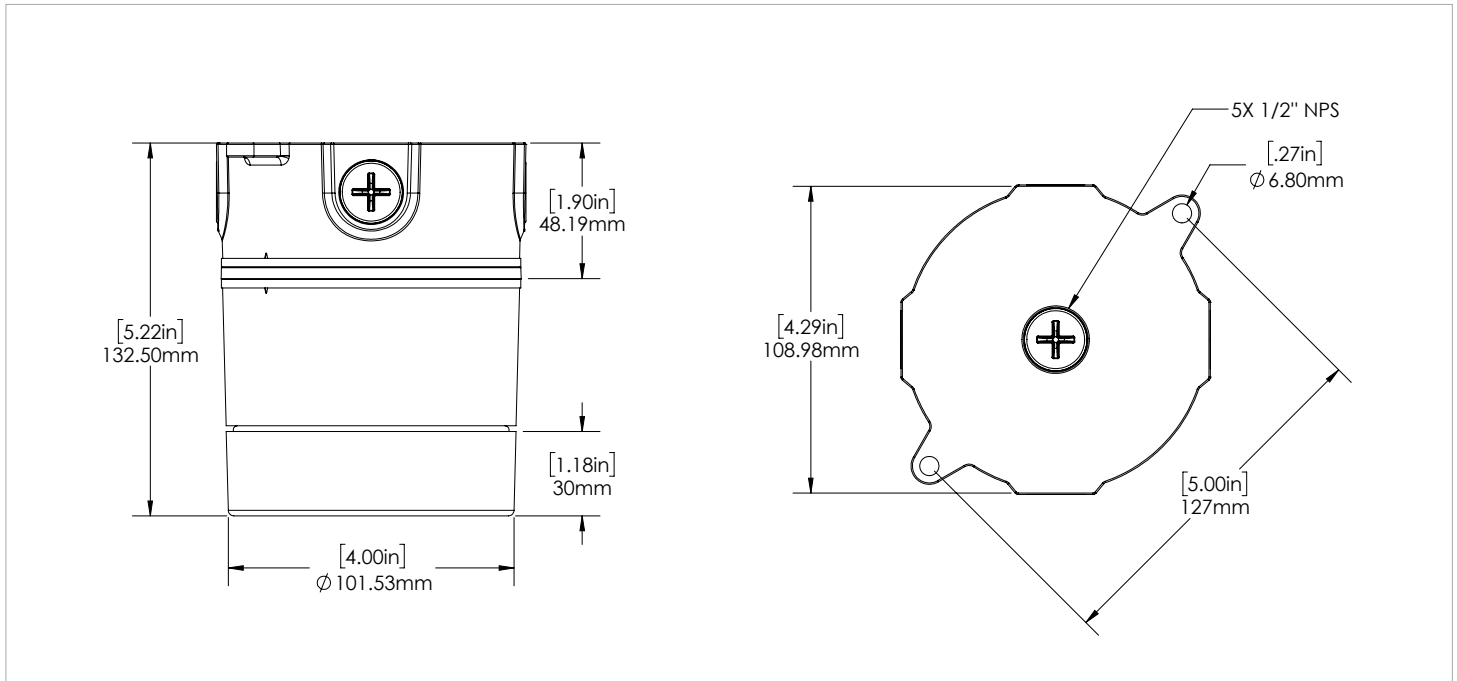

MOUNTING OPTIONS

This fixture series is also available in **wall mount** or **pendant mount**.



ORDERING GUIDE:

DVAKSX	LED14	B			DIM	FR	CM
Fixture	Wattage	Voltage	Color Temp.	Finish	Dimming	Lens	Mounting
	LED14	B - 120-277V	5K - 5000K* 4K - 4000K 3K - 3000K	DGY - Dove Grey* CC - Custom Colours	DIM - 0-10V Dimming	FR - Frosted Lens	CM - Ceiling Mount

* Standard Configuration

FIELD INSTALLED ACCESSORIES:

CHECK THE ACCESSORIES YOU WISH TO ORDER:



Cast Guard - Raw Finish
GD100CGS



Cast Guard - Dove Gray Finish
GD100CGS-DGY



GL100
Clear Glass



GL100HR
Heat Resistant



GL100RIB
Ribbed Glass



GL100SB
Sandblasted



RGL100A
Amber



RGL100B
Blue



RGL100G
Green



RGL100R
Red