

Mini Wall Pack

20W | 4000K | 120-277V



Powerful performance in a compact, attractive package. Ideal for security lighting, commercial entrances, stairways, perimeter areas, and more

1/2" NPT Plugs for Conduit or Controls

Built-in Photocell can be Bypassed with Quick Connect Plug



Polyester Powder Coat Finished
bronze

Low Glare, Frosted Polycarbonate Lens

Quick Installation With or Without Octagon Box

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	2,794 lm
Efficacy	144 lm/W
CCT	4000K
CRI	80
Beam Angle	100°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	S-V2KCPF

ISOCANDELA PLOT

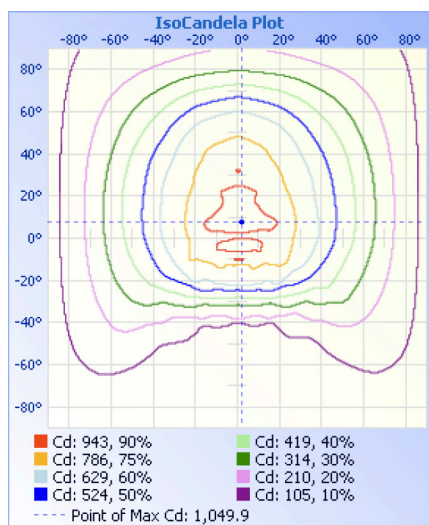

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	3.27 fc	35.0 ft	35.3 ft
34.0ft	0.82 fc	69.9 ft	70.7 ft
51.0ft	0.36 fc	104.9 ft	106.0 ft
68.0ft	0.20 fc	139.8 ft	141.3 ft
85.0ft	0.13 fc	174.8 ft	176.7 ft
102.0ft	0.09 fc	209.8 ft	212.0 ft

■ Vert. Spread: 91.6°
■ Horiz. Spread: 92.2°

ELECTRICAL

Wattage	20W
Voltage	120-277V
Surge Protection	2.5kV
Power Factor	0.9
THD	15%
Operating Temp	-40 to 45°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Polycarbonate
Finish	Powder coated
Finish Colour	Bronze
IP Rating	IP65
Net Weight	1.04 kg
Gross Weight	1.20 kg
Carton Qty	10
Carton Dimensions	460 x 325 x 245 mm

DIMENSIONAL DRAWINGS

