

## Series Spec Sheet

# PRMPN-2N

## PLASTIC COMBO RUNNING MAN STANDALONE LED 120-347 VAC Input

The PRMPN-2N commercial plastic combination running man sign is designed using durable and lightweight high impact thermoplastic. Combination sign with a canopy quick snap for a decorative look or a flush mount for rigid installation.

### FEATURES AND SPECIFICATIONS

#### • Circuitry

- LED ultra bright light source
- 120-347 VAC Input
- 120-347 V/0.32 A/4.5 W max power consumption
- Dry or damp location
- Ambient temperature 10°C to 35°C
- 120 minutes emergency power duration standard
- Two 2 W LED heads
- Push button test switch
- Diagnostic/pilot LED for AC ON
- Fully automatic, current limited charger
- Solid state design and construction with brownout and short circuit protection
- Temperature compensated
- Maintenance free, Ni-Cad battery

#### • Mechanical

- High impact, UV stabilized, thermoplastic construction
- Quick snap faceplates and universal canopy for rapid and simple installation
- Universal faces
- Universal mounting
- White colour is standard
- Fully adjustable, high impact thermoplastic round LED heads are standard

#### • Compliances

- CSA Certified to C22.2 #141-15, C860
- Meets requirements of ICES-005



**quick  
ship**



**ICES  
005**



Energy Verified  
Énergie Vérifiée

For complete warranty details, please see our terms and conditions on our website.

**QUICK SHIP AND TECHNICAL SPECIFICATION TABLE**

Part number	DC Volts (VDC)	Watts (W)	Nbr of faces	Nbr of heads	Head	Lamp (W)	Light source	Input Volts (VAC)	Color
PRMPN-2N	N/A	N/A	Universal	2	N/A	2	DEL	120-347	White


**QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

**ACCESSORIES (order separately)**

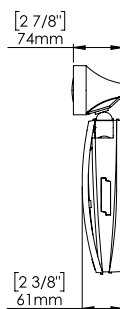
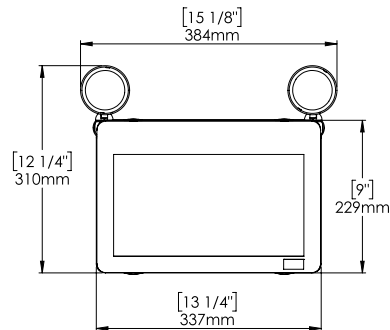
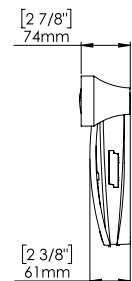
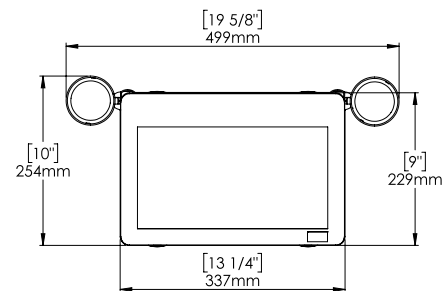
Part number	Type
FIBER-RMPN-CG	Running man fiber no arrow

**ACCESSORIES**

Flush wall mount backplate. Use for direct wall mount (no canopy required)  
Spider knock-out for wall-mount



Universal canopy


**DIMENSIONS**
**FLUSH MOUNT**

**TAPERED MOUNT**

**CONFIGURATIONS**


Comes standard with three pictogram legends for direction selection.



For double face no arrow options, please order the RMPN along with the following fiber: FIBER-RMPN-CG

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.