## 200A Incoming, 200A per Position



## Now Available as Right Entry!


Our single phase, three wire, 4 jaw meter sockets now come in a new version, to facilitate both overhead utility entry, and underground utility right side entry (the old product was left entry only, limiting the applications of use). They are available in two styles; Compression lugs (2K2RE), and 1/2" Stud type (2KU2CLXRE) for underground only. Bottom, and side KO's can accommodate up to 3" Conduit.

## 2K2RE shown


Description	Catalogue Number	
	2K2RE	2KU2CLXRE
Voltage (V)	120/240V	120/240V
UPC	621037001923	621037001930
Amperes (A)	200 in, 200A per position	200A in, 200A per position
Poles	1PH 3 Wire	1PH 3 Wire
Frequency (Hz)	60	60
CSA Listed	Yes	Yes
Enclosure	Type 3R (outdoor)	Type 3R (outdoor)
Туре	OH/UG Compression	UG 1/2" Stud
Size (Inches)	26.185 x 15.125 x 5.512	26.185 x 15.125 x 5.512



## **Dimensions 2K2RE**

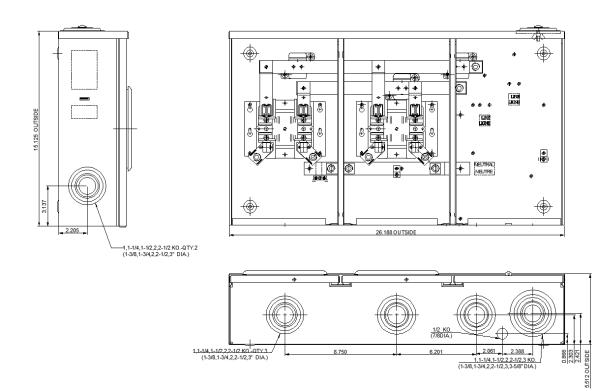

**Dimensions 2KU2CLXRE** 

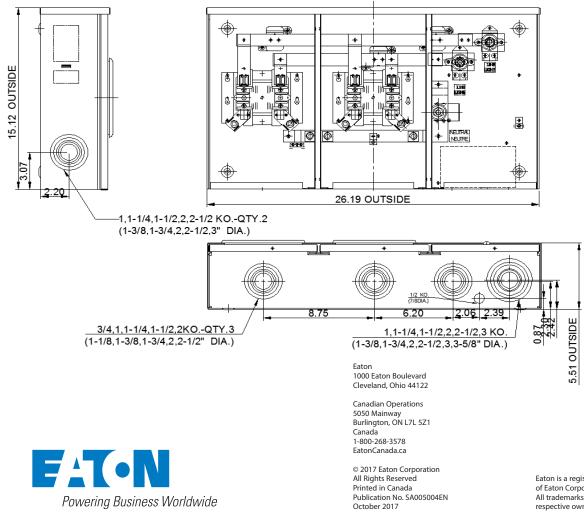

Eaton is a registered trademark of Eaton Corporation. All trademarks are property of their respective owners.