
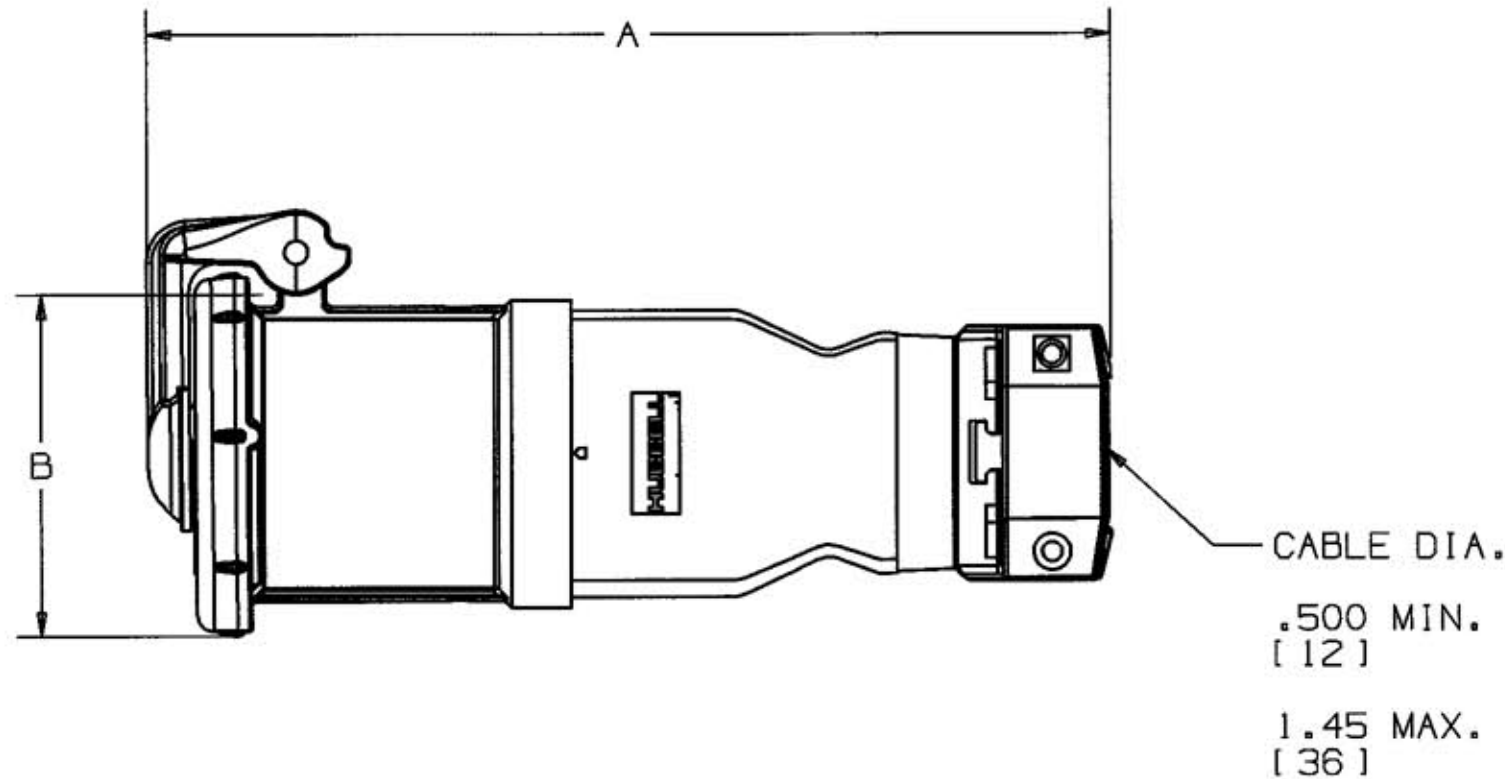


M-7862 3

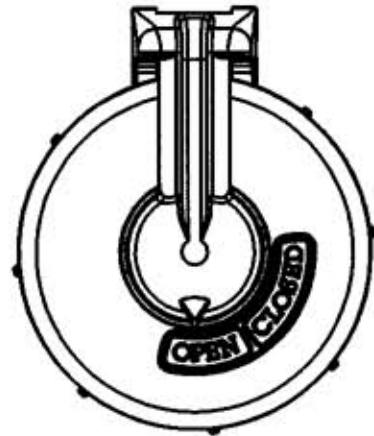

NOTES: (UNLESS OTHERWISE SPECIFIED)
 1) DIMENSION FORMAT IS: INCHES
 [mm]

TABLE									
AMPS	MAX VOLTAGE AC/DC	CONNECTOR CATALOG NUMBER	CONNECTOR			DIM "A"		DIM "B"	
			STYLE	POLE	WIRE	INS.	mm	INS.	mm
60	600/250	HBL360CS1W	S1	2P	3W	9.9	251	3.5	89
60	600/250	HBL460CS1W	S1	3P	4W				
60	600/250	HBL360CS2W	S2	2P	3W				
60	600/250	HBL560CS1W	S1	4P	5W	10.1	256	3.8	96
60	600/250	HBL460CS2W	S2	3P	4W				

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BOX TERMINAL	STEEL	NICKEL PLATE
GROUND STANDOFF	BRASS	
GROUND BRACKET	COPPER ALLOY	NICKEL PLATE
HINGE BUSHING	ALUMINUM	
SPRING GUIDE	STAIN STEEL	
LID SPRING	STAIN STEEL	
LID	ALUMINUM	GRAY EPOXY
LID LIFTER	ALUMINUM	GRAY EPOXY
O-RING	RUBBER	
LID GASKET	RUBBER	
CLAMP NUT	BRASS	NICKEL PLATE
GLAND	RUBBER	
SPRING WASHER	STAIN STEEL	
WAVE SPRING	STAIN STEEL	
RIVET	ALUMINUM	
CONNECTOR	ALUMINUM	
SET SCREW	STAIN STEEL	
SCREWS	STAIN STEEL	
PIN SPRING	COPPER ALLOY	SILVER COATED
INTERIOR	THERMOSET POLYESTER	
PLUG BODY	THERMOPLASTIC POLYESTER	
PINS	BRASS	

3	ADDED COLUMNS "AMPS", "MAX VOLTAGE AC/DC", & "CONNECTOR CATALOG NUMBER" TO TABLE, "SEE TABLE", AND NOTE 1; DRAWING TITLE WAS "60A PIN & SLEEVE CONNECTOR ASSEMBLY STYLES 1 & 2"; REMOVED "mm" FROM DIMENSIONS; PER DCN #8695. JMN	TCM	1/23/02
2	DCN 5807-B 2/10/99 UPDATED LIST OF PARTS		
1	RELEASED PER DCN 5841 12/18/97 B.C.	RDK	12/20/97
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE 60A INSULGRIP
 PIN & SLEEVE CONNECTOR
 STYLE 1 & 2

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS ± 1/64	DR. BY B.C.	APP. BY RDK
3 DECIMALS ± .005	TR. BY	SCALE .5
ANGLES ± 2°	CHK'D BY RDK	DATE 12/18/97
2 DECIMALS ± .01		

DIMENSION SHEET FOR CAT. NO. SEE TABLE
 REPAIRABLE NON-REPAIRABLE
 B
 M-7862
 3