
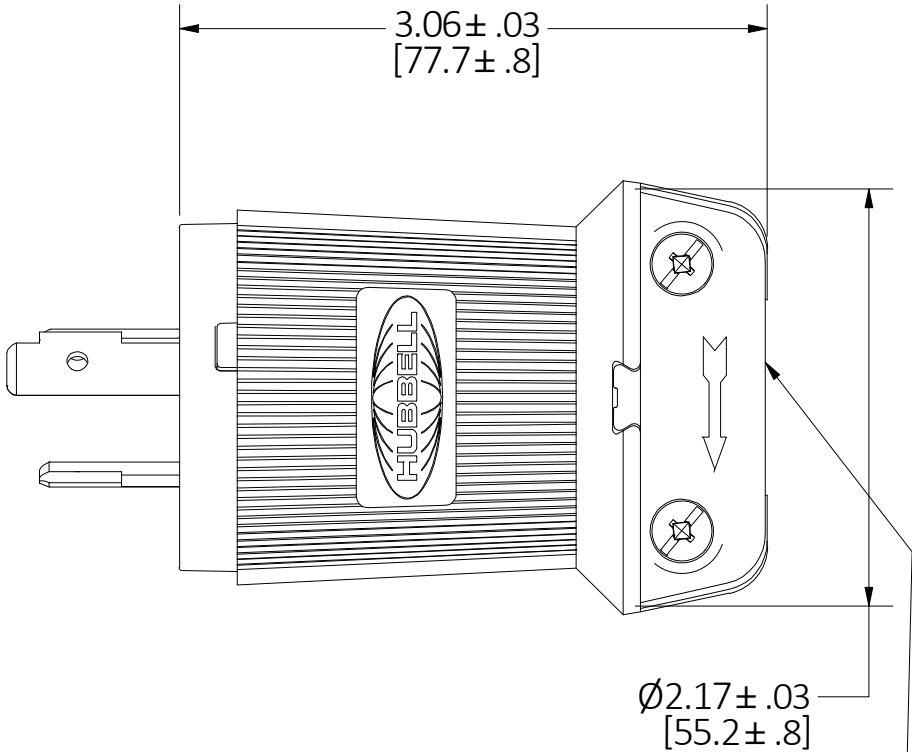
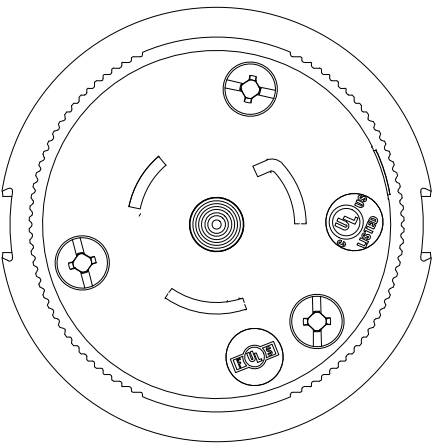


M-14324

1

CAT. NO. & RATING PRINTED
ON BLADE HOLDER, COLOR
CODE BY VOLTAGE

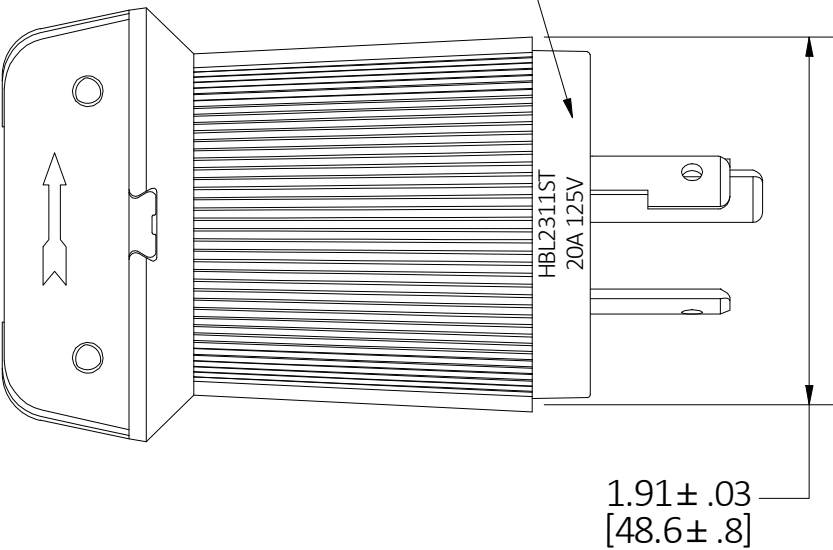

CORD CLAMP RANGE:
CORD: 14/3 - 8/3 TYPE S
14/3 - 12/3 TYPE SJ


NEMA NO.	RATING	POLE/WIRE	CAT. NO.	BLADE CONFIGURATION	VOLTAGE COLOR CODE
L5-20P	125V	2P/3W GROUNDING	HBL2311ST		YELLOW
L6-20P	250V	2P/3W GROUNDING	HBL2321ST		BLUE
L7-20P	277VAC	2P/3W GROUNDING	HBL2331ST		GRAY
L8-20P	480VAC	2P/3W GROUNDING	HBL2341ST		RED

NOTES (UNLESS OTHERWISE SPECIFIED):

- DIMENSIONS ARE IN INCHES [mm].
- ALL DEVICES ARE cULus LISTED & FED SPEC.
- CORD TYPES: S & SJ
- CORD CLAMP RANGE: 0.35 [9 mm] - 0.93 [24 mm].
- WIRING TERMINAL ACCOMMODATION: 14 AWG - 8 AWG STRANDED COPPER WIRE ONLY.
- ASSEMBLY SCREWS ARE PHILLIPS/SLOTTED/ROBERTSON HEAD.
- CATALOG NUMBERS & RATING ARE PAD PRINTED ON THE SIDE OF THE DEVICE, COLOR CODED BY VOLTAGE.

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
COVER	NYLON	BLACK
CORD CLAMP	NYLON	NATURAL
BLADE HOLDER	NYLON	NATURAL
RETAINER	NYLON	BLACK
BLADES	COPPER ALLOY	
SPRING	STAINLESS STEEL	
PLUNGER	NYLON	
ASSEMBLY FASTENERS	STEEL	ZINC PLATE
CORD CLAMP INSERTS	NYLON	BLACK
DUST SHIELD	TPE	BLACK



CAT. NO. HBL2311ST
(NOT SHOWN TO SCALE)

1	INITIAL RELEASE PER DCN 220401018715 AM	MAM	05/18/22
REV	DESCRIPTION	APP	DATE
THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].			
TITLE 20A 3-WIRE TWIST-LOCK® EDGE SCREWLESS TERMINATION PLUG			
		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLE TOL. ±2°		DR. BY AM CHK. BY MAM	SCALE 1 : 1 DATE 05/31/21