

# Cable, Cord and Hose Reels



## Features and Benefits

### Commercial Cord Reels

- Durable steel construction for commercial and general purpose applications
- Compact size, flexible mounting options for ceiling, wall or bench
- Automatic ratchet lock holds cord at desired length and provides easy, smooth retraction of cord
- Attached plug for power cord requires no wiring



### Commercial Cord Reels

- Durable light weight non-metallic housing
- Removable bracket allows reel to be dis-engaged from mount providing portability
- 40 Ft. of #12/3 cord for greater current carrying capacity
- Triple tap outlet with supplemental over current protection

### Commercial Cord Reels

Description	Amps	Volts AC	Cable Length Feet (m)	Cable Type	Watts (Max)	Weight Lbs. (kg)	Catalog Number
Black Reel with triple tap outlet.	15	125	40 (12.2)	#12/3 SJTW	1,875	13.8 (6.3)	<b>HBLC40123TT</b>
Black Reel with wire leads.	15	125	40 (12.2)	#12/3 SJTW	1,875	13.8 (6.3)	<b>HBLC40123</b>
White Reel with triple tap outlet and white cord.	10	125	30 (9.1)	#16/3 SJT	1,250	8.5 (3.9)	<b>HBLC30163TT</b>
White Reel with single connector and white cord.	15	125	20 (6.1)	#14/3 SJT	1,875	8.5 (3.9)	<b>HBLC20143C</b>
Yellow Reel with Hubbell HBL5969VBLK connector.	10	125	25 (7.6)	#16/3 SJT	1,250	8.5 (3.9)	<b>HBLC25163C</b>
Yellow Reel with wire leads.	10	125	25 (7.6)	#16/3 SJT	1,250	8.5 (3.9)	<b>HBLC25163**</b>


Note: Reels supplied with 2 ft. power supply cord and molded on straight blade 15A plug.

\*\*UL Listed only.

### Specifications

Listing/Certification	UL 355.
Environment	Dry, indoor, non-hazardous locations.
Incandescent Lamp	75 watt max., auto switch, no receptacle; 100 watt max. bulb, with receptacle.
Fluorescent Lamp	10A/1200W max. with in-line receptacle; 13 watt without receptacle.

### Dimensions

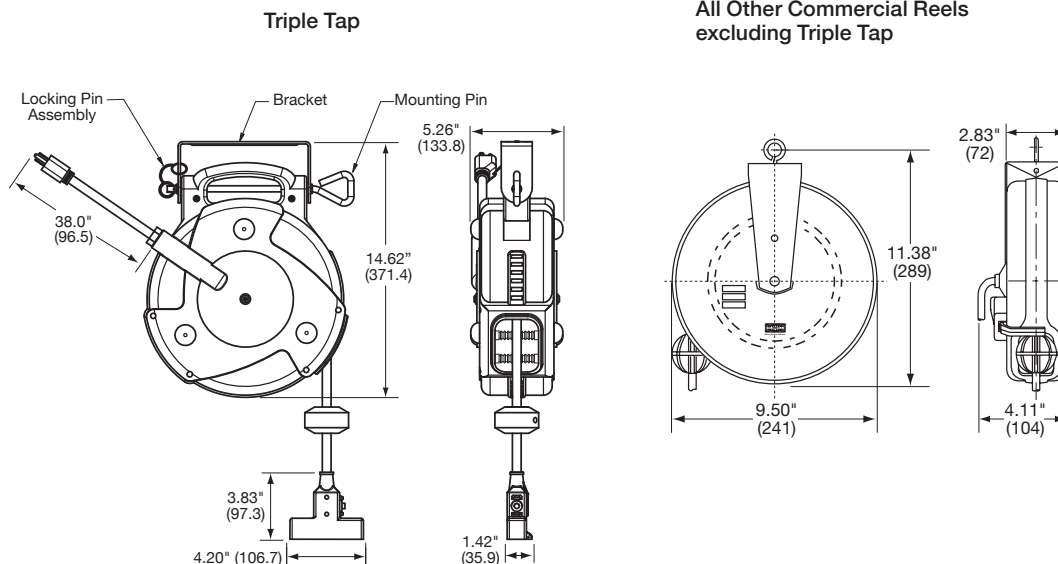

HBLC40123TT



HBLC30163TT



HBLC20143C



HBLC25163C

Dimensions in Inches (mm)