
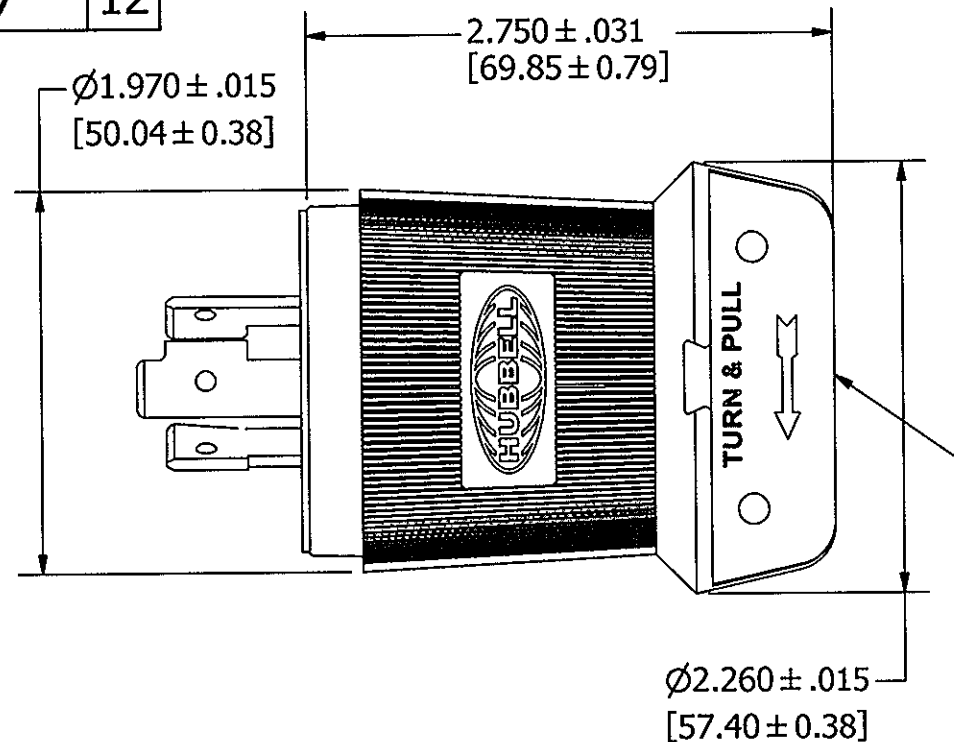
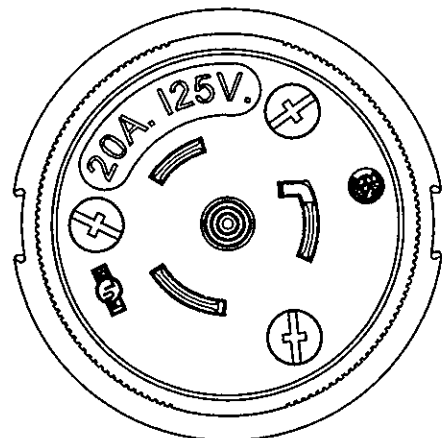


M-7897 12

CAT. NO. & RATING PRINTED ON BLADE HOLDER, COLOR CODE BY VOLTAGE

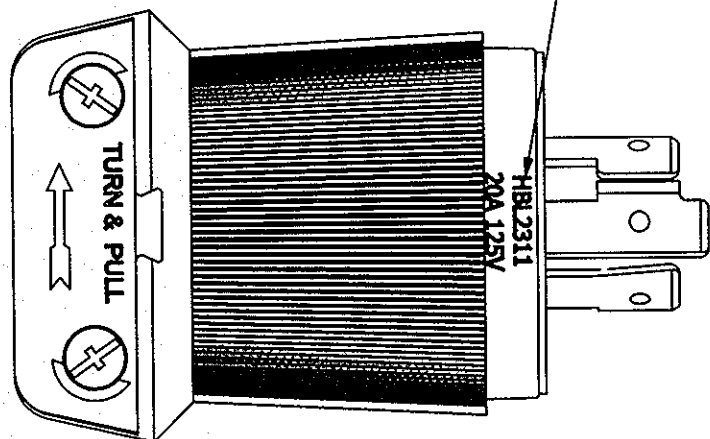

CORD CLAMP RANGE:

CORD: 16/3 - 8/3

TYPE S

14/3 - 10/3

TYPE SJ


DIAMETER RANGE:

Ø.360 - .930

[9.14 - 23.62]

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
COVER	NYLON	BLACK
CORD CLAMP	NYLON	NATURAL
BLADE HOLDER	NYLON	NATURAL
RETAINER	POLYCARBONATE	CLEAR
BLADE	.060 BRASS	
WIRE CLAMP	.080 CRS	NICKEL PLATE
#10 TERMINAL SCREWS	BRASS	[A]
#10 GROUND SCREW	BRASS	GREEN
ASSEMBLY FASTENERS	STEEL	ZINC PLATE
INSERTS	NYLON	BLACK
DUST SHIELD	TPE	BLACK

DIMENSION SHEET FOR CAT. NO. SEE TABLE



CATALOG NO. HBL2311 (NOT SHOWN TO SCALE)

REPAIRABLE

NON-REPAIRABLE

B

M-7897

12

NEMA NO.	RATING	POLE/WIRE	CAT. NO.	CONFIGURATION	VOLTAGE COLOR CODE
L5-20P	125V	2P/3W GROUNDING	HBL2311 HBL23CM11 [B] HBL2311BK [C] HBL2311EBK [D]		YELLOW
L6-20P	250V	2P/3W GROUNDING	HBL2321 HBL23CM21 [B] HBL2321BK [C] HBL2321EBK [D]		BLUE
L7-20P	277VAC	2P/3W GROUNDING	HBL2331		GRAY
L8-20P	480VAC	2P/3W GROUNDING	HBL2341		RED
L9-20P	600VAC	2P/3W GROUNDING	HBL2351		BLACK
L24-20P	347VAC	2P/3W GROUNDING	HBL3721		BLACK

NOTES:

- ALL SCREWS ARE COMBINATION PHILLIPS/SLOTTED/ROBERTSON HEAD.
- ALL DEVICES ARE UL LISTED, CSA CERTIFIED AND FED SPEC.
- COMPONENT FINISHES:
 - [A] WHITE FINISH ON NEUTRAL BLADE WHEN USED.
 - [B] CM DEVICES (CORROSION RESISTANT) SAME AS ABOVE EXCEPT; COVER AND CORD CLAMP - YELLOW
TERMINAL SCREWS & BLADES - NICKEL PLATED
WIRE CLAMPS - BRASS, NICKEL PLATED
ASSEM FASTENERS - STAINLESS STEEL
 - [C] BK DEVICES ARE ALL BLACK.
 - [D] E DEVICES PROVIDED WITH CORD CLAMP INSERTS.

DIMENSIONS ARE IN INCHES [mm].

12	REVISED PER DCN 22024 SPN	DJP	5/19/16
REV	DESCRIPTION	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
20A 3-WIRE TWIST-LOCK PLUG

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLES = ± 2°	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
	DR. BY B.C.	APP. BY JFZ
	TR. BY	SCALE 1:1
	CHK. BY JFZ	DATE 02/12/98