M-6266 | 2



CORD CLAMP TAKES
CORDS FROM .230 TO .421 DIA.

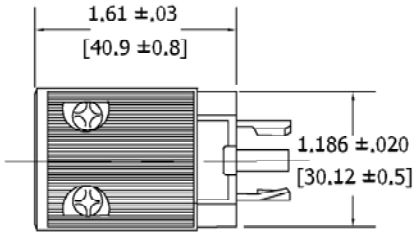



CAT No.	CONFIGURATION	RATING
HBL7485V	NEMA ML-3P	15A 125/250V AC 3-POLE, 3-WIRE
HBL7594V	NEMA ML-2P	15A 125V AC OR DC 2-POLE, 3-WIRE

NOTE: INCHES
[mm]

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	NYLON ZYTEL	BLACK
BLADES	BRASS	
CENTER CONTACT	BRASS	
PAN HEAD SCREWS	STEEL	BLACK OXIDE

SUPERSEDES DRAWING DATED 6-8-81

SYM	DESCRIPTION	APP	DATE
2	UPDATED TO NEW FORMAT, ADDED HBL TO CAT #'S IN TABLE CHANGED DIM'S FROM FRACTIONS TO DECIMAL PER DCN 20311. MYA	DJP	2-6-14

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
15A VALISE MIDGET
TWIST-LOCK PLUG

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

DR. BY	P.M.	APP. BY	DJP
TR. BY	MYA	SCALE	1:1
CHK'D BY	DJP	DATE	2/6/14

DIMENSION SHEET FOR CAT. NO.
SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-6266

2

CODE 74848