Product Bulletin for Medium Bi-Pin & High Output Recessed Double Contact Fluorescent Lampholders



Detter Than Ever... Our Redesigned Pedestal-Type Fluorescent Lampholders

- Slide-On Shallow Base for T-8 and T-12 Lamps
- Now Available Shunted for Use with Instant-Start Applications

Leviton's newly redesigned Pedestal-Type fluorescent lampholders simplify fixture design and increase options for OEMs. The Medium Bi-Pin and High Output 800MA and 1500MA Recessed Double Contact lampholders are molded out of high temperature, arc-resistant thermoplastic with a 94V-0 flammability rating. Adding a new dimension, the previously round plunger area has been reshaped into a rectangle, resulting in smoother travel during lamp insertion. Now available shunted for use with instant-start ballasts, the lampholders fit the same 20-ga. panel openings as previous Leviton models.

Applications:

- Indoor lighting in commercial and industrial facilities
- · Suitable for outdoor applications when properly enclosed

Features and Benefits:


- High temperature, arc-resistant thermoplastic with a 94V-0 flammability rating
- Rectangular plunger area provides smoother travel during lamp insertion
- Available shunted for use with instant-start applications
- Quickwire terminals accept No. 18 or No. 16 AWG solid wire, stripped 3/8" to 1/2"
- Silver-plated contacts
- Fits 20-ga. panel openings, same as previous Leviton models
- Meets proposed UL requirements for instant-start applications

Agency Standards:

- UL Listed (File #E-5833)
- CSA Certified (File #LR-1863)
- NOM Certified 057

Dimensional Drawings:

96 (2.438.4) FOR 96" LAMP BACK TO BACK 1.76 (44.7) 0.64 (16.3) 0.040 (1.02) FOR 20 GA PANEL 1.12 (28.5) 1.06 (26.9) 1.06 (26.9) 0.56 (14.2) 1.09 (27.7) 1.09 (27.7) 1.72 (43.7) 1.17 (29.7) 1.17 (29.7) 0.55 (14.0) 1.12 (28.5) 1.28 (32.5) 1.28 (32.5) 1.44 (36.6) 1.31 (33.3) Cat No. 13550-0NW 1.44 (36.6) Cat No. 13551-0NW

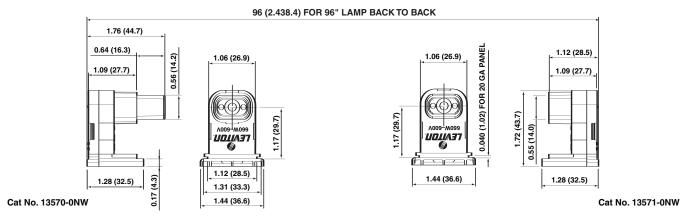

Rating: 660W-600V

Ordering Information:

Cat. No.	Description
13550-0NW (Replaces 13550-00W)	High Output Recessed Double Contact Fluorescent Pedestal Lampholder with slide-on, shallow base for T-8 and T-12 lamps (R17d base). Multiple terminal design accepts jumper leads on stationary end only; plunger style.
13551-0NW (Replaces 13551-00W)	High Output Recessed Double Contact Fluorescent Pedestal Lampholder with slide-on, shallow base for T-8 and T-12 lamps (R17d base). Multiple terminal design accepts jumper leads on stationary end only; stationary style.
23550-0NW	Same as 13550-0NW, except with internal shunt connection for use with instant-start ballasts. Back of lampholder is stamped "S" to identify shunt and help prevent improper applications, and "I" to show compliance with UL instant-start requirements.
23551-0NW	Same as 13551-0NW, except with internal shunt connection for use with instant-start ballasts. Back of lampholder is stamped "S" to identify shunt and help prevent improper applications, and "I" to show compliance with UL instant-start requirements.
13570-0NW (Replaces 13570-00W)	Medium Bi-Pin Fluorescent Pedestal Lampholder with slide-on, shallow base for T-8 and T-12 lamps (G13 base); plunger style.
13571-0NW (Replaces 13571-00W)	Medium Bi-Pin Fluorescent Pedestal Lampholder with slide-on, shallow base for T-8 and T-12 lamps (G13 base); stationary style.
23570-0NW	Same as 13570-0NW, except with internal shunt connection for use with instant-start ballasts. Back of lampholder is stamped "S" to identify shunt and help prevent improper applications, and "I" to show compliance with UL instant-start requirements.
23571-0NW	Same as 13571-0NW, except with internal shunt connection for use with instant-start ballasts. Back of lampholder is stamped "S" to identify shunt and help prevent improper applications, and "I" to show compliance with UL instant-start requirements.

Leviton Manufacturing Co., Inc.

- 59-25 Little Neck Parkway, Little Neck, New York 11362-2591
 Tel: 1-800-833-3532 Tech Line (8:30AM–7:30PM ET, Mon.-Fri.): 1-800-824-3005
- FAX: 1-800-832-9538 Web site: www.leviton.com Email: info@leviton.com

Leviton Manufacturing of Canada, Ltd.

165 Hymus Blvd., Pointe Claire, Quebec H9R 1E9 • Tel: 1-800-469-7890 • FAX: 1-800-563-1853

Because Leviton engages in a continuous program of product improvement, all data in this publication is subject to change without notice.



