



Solid-state contactor 1-phase 3RF2 AC 51 / 20 A / 40 °C 24-230 V / 110-230 V AC screw terminal

|   |  |
|---|--|
| <p><b>product brand name</b></p> <p><b>product designation</b></p> <p><b>design of the product</b></p> <p><b>product type designation</b></p> <p><b>manufacturer's article number</b></p> <ul style="list-style-type: none"> <li>• _1 of the accessories that can be ordered</li> <li>• _4 of the accessories that can be ordered</li> </ul> <p><b>product designation</b></p> <ul style="list-style-type: none"> <li>• _1 of the accessories that can be ordered</li> <li>• _4 of the accessories that can be ordered</li> </ul> | <p>SIRIUS</p> <p>solid-state contactor</p> <p>single-phase</p> <p>3RF23</p> <p><a href="#">3RF2900-3PA88</a></p> <p><a href="#">3RF2920-0GA33</a></p> <p>terminal cover</p> <p>load monitoring</p> |
|---|--|

### General technical data

|   |  |
|---|--|
| <p><b>product function</b></p> <p><b>power loss [W] for rated value of the current</b></p> <ul style="list-style-type: none"> <li>• at AC in hot operating state</li> <li>• at AC in hot operating state per pole</li> <li>• without load current share typical</li> </ul> <p><b>insulation voltage rated value</b></p> <p><b>degree of pollution</b></p> <p>type of voltage of the control supply voltage</p> <p>surge voltage resistance of main circuit rated value</p> <p><b>shock resistance according to IEC 60068-2-27</b></p> <p><b>vibration resistance according to IEC 60068-2-6</b></p> <p><b>reference code according to IEC 81346-2</b></p> <p><b>Substance Prohibitance (Date)</b></p> | <p>zero-point switching</p> <p>20 W</p> <p>20 W</p> <p>3.5 W</p> <p>600 V</p> <p>3</p> <p>AC</p> <p>6 kV</p> <p>15g / 11 ms</p> <p>2g</p> <p>Q</p> <p>05/28/2009</p> |
|---|--|

### Main circuit

|  |  |
|--|--|
| <p><b>number of poles for main current circuit</b></p> <p><b>number of NO contacts for main contacts</b></p> <p><b>number of NC contacts for main contacts</b></p> <p>operating voltage at AC</p> <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul> <p><b>operating frequency rated value</b></p> <p><b>operating range relative to the operating voltage at AC</b></p> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul> <p><b>operational current</b></p> <ul style="list-style-type: none"> <li>• at AC-51 rated value</li> <li>• at AC-51 according to IEC 60947-4-3</li> <li>• according to UL 508 rated value</li> </ul> <p><b>operational current minimum</b></p> <p><b>rate of voltage rise at the thyristor for main contacts</b></p> <p><b>maximum permissible</b></p> | <p>1</p> <p>1</p> <p>0</p> <p>24 ... 230 V</p> <p>24 ... 230 V</p> <p>50 ... 60 Hz</p> <p>20 ... 253 V</p> <p>20 ... 253 V</p> <p>20 A</p> <p>13.2 A</p> <p>17.6 A</p> <p>500 mA</p> <p>1 000 V/μs</p> |
|--|--|

|  |  |
|--|--|
| <b>blocking voltage at the thyristor for main contacts maximum permissible</b> | 800 V  |
| <b>reverse current of the thyristor</b>  | 10 mA  |
| <b>derating temperature</b>  | 40 °C  |
| <b>surge current resistance rated value</b>                                    | 600 A  |
| <b>I<sup>2</sup>t value maximum</b>  | 1 800 A <sup>2</sup> ·s  |
| <b>Control circuit/ Control</b>  |  |
| <b>type of voltage of the control supply voltage</b>                           | AC   |
| <b>control supply voltage 1 at AC</b>  |  |
| • at 50 Hz   | 110 ... 230 V  |
| • at 60 Hz   | 110 ... 230 V  |
| <b>control supply voltage frequency</b>  |  |
| • 1 rated value  | 50 Hz  |
| • 2 rated value  | 60 Hz  |
| <b>control supply voltage at AC</b>  |  |
| • at 50 Hz full-scale value for signal<0> recognition                          | 40 V   |
| • at 60 Hz full-scale value for signal<0> recognition                          | 40 V   |
| <b>control supply voltage</b>  |  |
| • at AC initial value for signal <1> detection                                 | 90 V   |
| <b>symmetrical line frequency tolerance</b>                                    | 5 Hz   |
| <b>control current at minimum control supply voltage</b>                       |  |
| • at AC  | 2 mA   |
| control current at AC rated value  | 15 mA  |
| <b>ON-delay time</b>   | 40 ms; additionally max. one half-wave   |
| <b>OFF-delay time</b>  | 40 ms; additionally max. one half-wave   |
| <b>Auxiliary circuit</b>   |  |
| <b>number of NC contacts for auxiliary contacts</b>                            | 0  |
| <b>number of NO contacts for auxiliary contacts</b>                            | 0  |
| <b>number of CO contacts for auxiliary contacts</b>                            | 0  |
| <b>Installation/ mounting/ dimensions</b>                                      |  |
| <b>fastening method</b>  | screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 |
| • side-by-side mounting  | Yes  |
| <b>design of the thread of the screw for securing the equipment</b>            | M4   |
| <b>height</b>  | 95 mm  |
| <b>width</b>   | 22.5 mm  |
| <b>depth</b>   | 120 mm   |
| <b>Connections/ Terminals</b>  |  |
| <b>type of electrical connection</b>   |  |
| • for main current circuit   | screw-type terminals   |
| • for auxiliary and control circuit  | screw-type terminals   |
| <b>type of connectable conductor cross-sections</b>                            |  |
| • for main contacts  |  |
| — solid  | 2x (1.5 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> )                       |
| — finely stranded with core end processing                                     | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>  |
| • at AWG cables for main contacts  | 2x (14 ... 10)   |
| <b>connectable conductor cross-section for main contacts</b>                   |  |
| • solid or stranded  | 1.5 ... 6 mm <sup>2</sup>  |
| • finely stranded with core end processing                                     | 1 ... 10 mm <sup>2</sup>   |
| <b>type of connectable conductor cross-sections</b>                            |  |
| • for auxiliary and control contacts   |  |
| — solid  | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )                     |
| — finely stranded with core end processing                                     | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )                     |
| — finely stranded without core end processing                                  | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )                     |
| • at AWG cables for auxiliary and control contacts                             | 1x (AWG 20 ... 12)   |
| AWG number as coded connectable conductor cross section for main contacts      | 10 ... 14  |
| <b>tightening torque</b>   |  |
| • for main contacts with screw-type terminals                                  | 2 ... 2.5 N·m  |
| • for auxiliary and control contacts with screw-type terminals                 | 0.5 ... 0.6 N·m  |
| <b>tightening torque [lbf·in]</b>  |  |

|  |   |                                  |
|--|---|----------------------------------|
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul>  | 18 ... 22 lbf-in<br>4.5 ... 5.3 lbf-in  |                                  |
| <b>design of the thread of the connection screw</b>  |   |                                  |
| <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• of the auxiliary and control contacts</li> </ul>   | M4<br>M3  |                                  |
| <b>stripped length of the cable</b>  |   |                                  |
| <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• for auxiliary and control contacts</li> </ul>  | 7 mm<br>7 mm  |                                  |
| <b>Safety related data</b>   |   |                                  |
| <b>protection class IP on the front according to IEC 60529</b>   | IP20  |                                  |
| <b>touch protection on the front according to IEC 60529</b>  | finger-safe, for vertical contact from the front  |                                  |
| <b>Ambient conditions</b>  |   |                                  |
| installation altitude at height above sea level maximum  | 1 000 m   |                                  |
| <b>ambient temperature</b>   |   |                                  |
| <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> </ul>   | -25 ... +60 °C<br>-55 ... +80 °C  |                                  |
| <b>Electromagnetic compatibility</b>   |   |                                  |
| <b>conducted interference</b>  |   |                                  |
| <ul style="list-style-type: none"> <li>• due to burst according to IEC 61000-4-4</li> <li>• due to conductor-earth surge according to IEC 61000-4-5</li> <li>• due to conductor-conductor surge according to IEC 61000-4-5</li> <li>• due to high-frequency radiation according to IEC 61000-4-6</li> </ul>  | 2 kV / 5 kHz behavior criterion 2<br>2 kV behavior criterion 2<br>1 kV behavior criterion 2<br>140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1                    |                                  |
| <b>field-based interference according to IEC 61000-4-3</b>   | 80 MHz ... 1 GHz 10 V/m, behavior criterion 1   |                                  |
| <b>electrostatic discharge according to IEC 61000-4-2</b>  | 4 kV contact discharging / 8 kV air discharging, behavior criterion 2   |                                  |
| <b>conducted HF interference emissions according to CISPR11</b>  | Class A for industrial environment  |                                  |
| <b>field-bound HF interference emission according to CISPR11</b>   | Class B for the domestic, business and commercial environments  |                                  |
| <b>Short-circuit protection, design of the fuse link</b>   |   |                                  |
| manufacturer's article number  |   |                                  |
| <ul style="list-style-type: none"> <li>• of gS fuse for semiconductor protection at NH design usable</li> <li>• of full range R fuse link for semiconductor protection at cylindrical design usable</li> <li>• of back-up R fuse link for semiconductor protection at NH design usable</li> <li>• of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable</li> <li>• of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable</li> <li>• of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable</li> </ul> | <a href="#">3NE1814-0</a><br><a href="#">5SE1325</a><br><a href="#">3NE8015-1</a><br><a href="#">3NC1032</a><br><a href="#">3NC1450</a><br><a href="#">3NC2263</a>                      |                                  |
| manufacturer's article number of the gG fuse   |   |                                  |
| <ul style="list-style-type: none"> <li>• at NH design usable</li> <li>• at cylindrical design 10 x 38 mm usable</li> <li>• at cylindrical design 14 x 51 mm usable</li> <li>• at cylindrical design 22 x 58 mm usable</li> </ul>   | <a href="#">3NA6807</a><br><a href="#">3NW6007-1</a><br><a href="#">3NW6107-1</a><br><a href="#">3NW6207-1</a> ; These fuses have a smaller rated current than the semiconductor relays |                                  |
| manufacturer's article number  |   |                                  |
| <ul style="list-style-type: none"> <li>• of DIAZED fuse usable</li> <li>• of NEOZED fuse usable</li> </ul>   | <a href="#">5SB2711</a><br><a href="#">5SE2320</a>  |                                  |
| <b>Certificates/ approvals</b>   |   |                                  |
| <b>General Product Approval</b>  | <b>EMC</b>  | <b>Declaration of Conformity</b> |



[Confirmation](#)



|                           |                   |       |         |
|---------------------------|-------------------|-------|---------|
| Declaration of Conformity | Test Certificates | other | Railway |
|---------------------------|-------------------|-------|---------|



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)



[Vibration and Shock](#)

**Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2320-1AA22>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2320-1AA22>




Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2320-1AA22>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RF2320-1AA22&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2320-1AA22&lang=en)

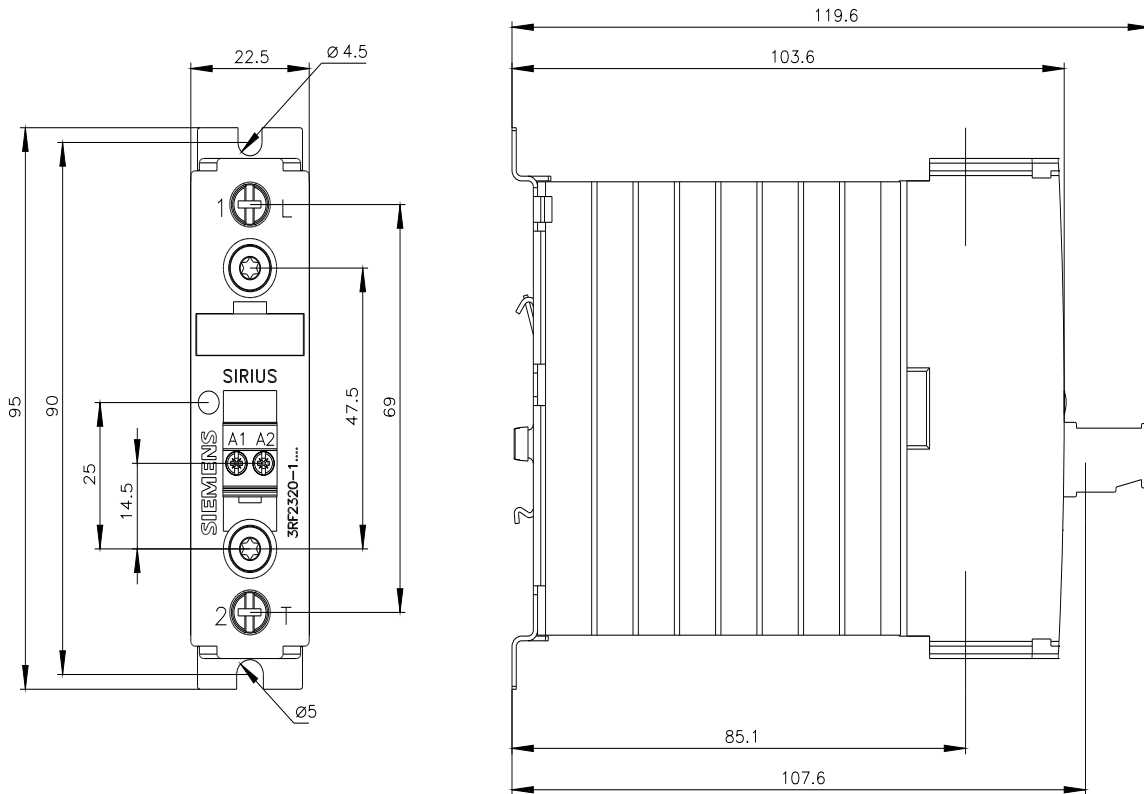

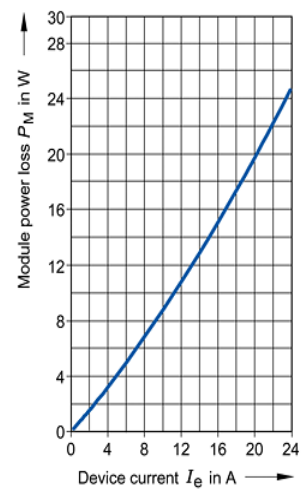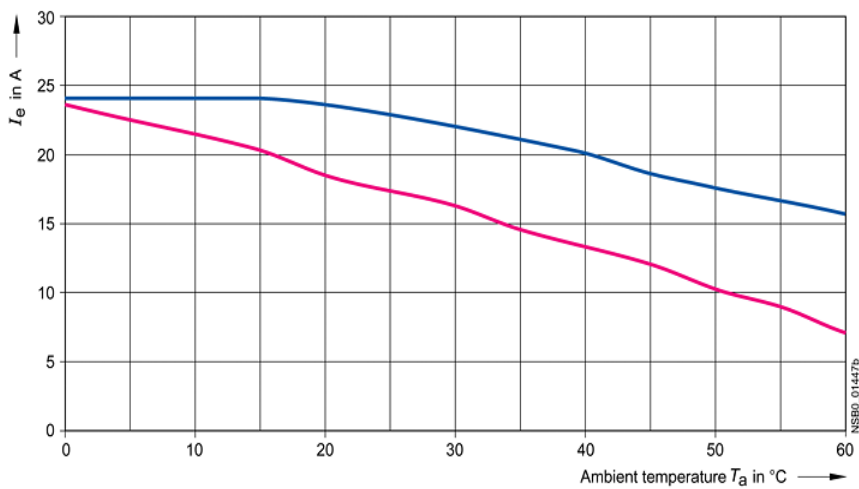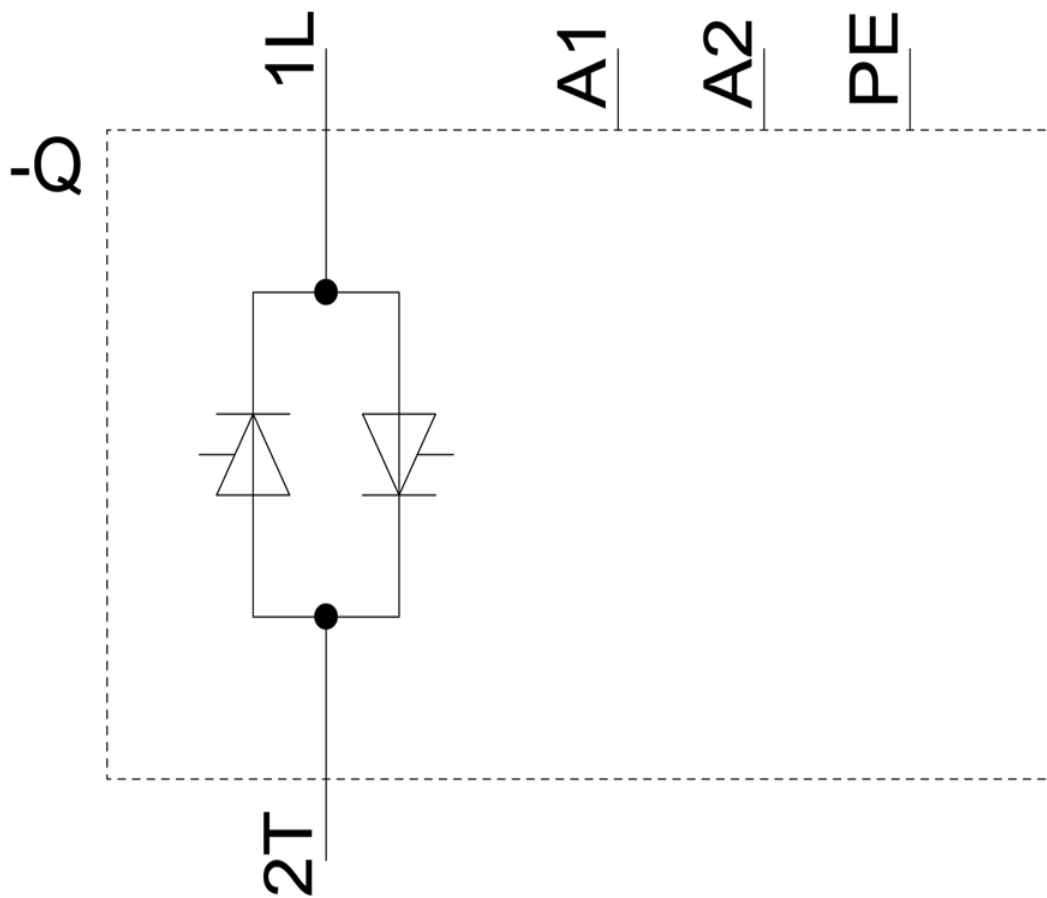

—  $I_{\max}$  Thermal limit current for side-by-side mounting  
—  $I_{IEC}$  Current according to IEC 947-4-3 for side-by-side mounting

last modified:

1/26/2022

