

LED BACKLIT PANEL




Specification:

Model No.:	Size	Wattage (W)	Efficacy (lm/W)	Color Temp (K)	CRI	Dim solution	Voltage
VO-22W40-120-3Way-B-PG	2x2 ft	40-30-20W	125	3500K-4000K-5000K changeable	Ra>80	0-10V	120-277V
VO-14W40-120-3Way-B-PG	1x4 ft	40-30-20W					
VO-24W50-120-3Way-B-PG	2x4 ft	50-40-30W					
VO-22W40-120-XX-B-PG	2x2 ft	40W	125	4000K-5000K			
VO-14W40-120-XX-B-PG	1x4 ft	40W					
VO-24W50-120-XX-B-PG	2x4 ft	50W					
VO-22W40-347-3Way-B-PG	2x2 ft	40-30-20W	125	3500K-4000K-5000K changeable		0-10V	120-347V
VO-14W40-347-3Way-B-PG	1x4 ft	40-30-20W					
VO-24W50-347-3Way-B-PG	2x4 ft	50-40-30W					
VO-22W40-347-XX-B-PG	2x2 ft	40W	125	4000K-5000K			
VO-14W40-347-XX-B-PG	1x4 ft	40W					
VO-24W50-347-XX-B-PG	2x4 ft	50W					

XX Represents 40 as 4000K and 50 as 5000K

Features:

- No LGP , never yellowing.
- High efficacy up to 125 lm/w, meet DLC 5.1 standard and premium version.
- Series: Color & Wattage tunable.
- 5 Years warranty



### Applications:

- Power Factor: >0.9
- CRI:>80
- Warranty : 5 years




PMMA LENS



SDCM < 4



UGR < 22




Flicker free




Thicker cooper foil


### Dimensions:

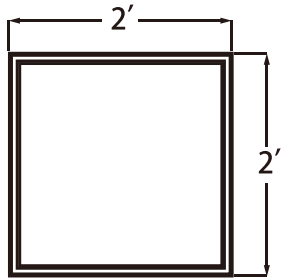

602\*602mm

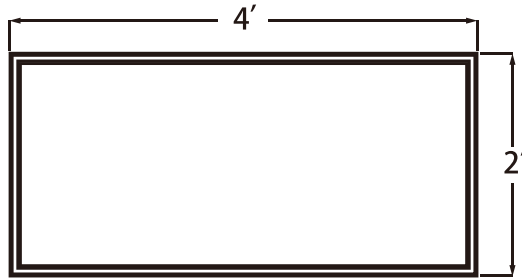

602\*1209mm

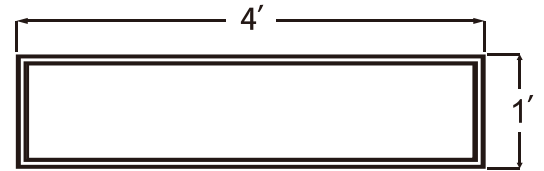

298\*1209mm


### Installation Accessories:



- Spring Clip



- Suspended Kit

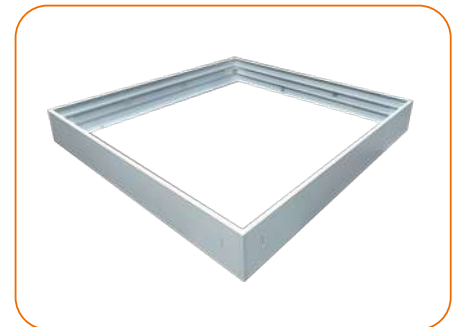

- Surface Mounted Frame