

# LED FIXTURE

**RIGID Series**



## LED Surface Discus RGD-HS

Slim design, Multi-Kelvin (CCT)



5-year limited warranty


Operating temperature range -20 °C ~ +40 °C



### Features & Benefits

- cETLus listed, Energy Star
- Mounts directly to J-box or retrofit 4", 5", 6" downlight
- TRIAC dimmable down to 10%
- Beam angle 120°
- Finish color white (interchangeable trim ring for matte black or satin nickel finish)
- L70 @ 50,000 Hrs, CRI ≥80
- Damp location rated

### Dimensional Drawing

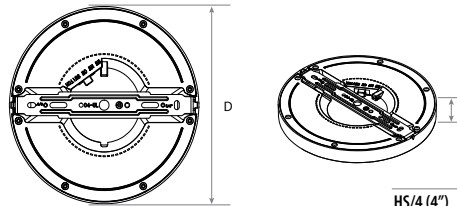

	M.O.D.	M.O.H.
HS/4 (4")	5 1/2"	0.61"
HS/6 (6")	6 1/2"	0.59"
HS/8 (8")	8 1/2"	0.59"
HS/11 (11")	11 1/2"	0.61"
HS/16 (16")	15 3/4"	0.95"
HS/24 (24")	23 5/8"	1.00"

### Ordering Information Example: RGD-HS/4/6W/MULTI-K/WH/D

Family Name	Fixture Type	Size	Wattage	CCT	Finish	Dimmable	Options
RGD (Rigid)	HS (Surface discus)	4 (4"), 6 (6"), 8 (8"), 11 (11"), 16 (16"), 24 (24")	6W, 12W, 18W, 24W, 30W, 48W	MULTI-K (Multi-Kelvin) 30K (3000K)	WH (White)	D (Dimmable)	Matte black trim ring Satin nickel trim ring (Sold separately)

### Product Specification

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Beam Angle	Damp Location	Dimmable	Dimension D×H (inch)	Case QTY.
3662144	Yes	RGD-HS/4/6W/MULTI-K/WH/D	6	120	50,000	420	30/40/50	≥80	120°	Yes	Y	5 1/2" × 0.61"	60
3662161	-	RGD-HS/4/6W/30K/WH/D	6	120	50,000	420	3000	≥80	120°	Yes	Y	5 1/2" × 0.61"	60
3662145	Yes	RGD-HS/6/12W/MULTI-K/WH/D	12	120	50,000	840	30/40/50	≥80	120°	Yes	Y	6 1/2" × 0.59"	40
3662162	-	RGD-HS/6/12W/30K/WH/D	12	120	50,000	840	3000	≥80	120°	Yes	Y	6 1/2" × 0.59"	40
3663130	-	RGD-HS/8/18W/30K/WH/D	18	120	50,000	1260	3000	≥80	120°	Yes	Y	8 1/2" × 0.59"	20
3663127	Yes	RGD-HS/8/18W/MULTI-K/WH/D	18	120	50,000	1260	30/40/50	≥80	120°	Yes	Y	8 1/2" × 0.59"	20
3664134	Yes	RGD-HS/11/24W/MULTI-K/WH/D	24	120	50,000	1920	30/40/50	≥80	120°	Yes	Y	11 1/2" × 0.61"	10
3664151	Yes	RGD-HS/11/24W/30K/WH/D	24	120	50,000	1920	3000	≥80	120°	Yes	Y	11 1/2" × 0.61"	10
3664159	Yes	RGD-HS/16/30W/30K/WH/D*	30	120	50,000	2200	3000	≥80	120°	Yes	Y	15 3/4" × 0.95"	10
3665174	Yes	RGD-HS/24/48W/30K/WH/D*	48	120	50,000	3290	3000	≥80	120°	Yes	Y	23 5/8" × 1.00"	5

Fixture types 4", 6", 8" & 11" come with embedded magnets to allow for optional trim selection mounting.  
\* Types 16" & 24" optional trim selection not available.

# LED Surface Discus RGD-HS

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Beam Angle	Damp Location	Dimmable	Dimension D×H (inch)	Case QTY.
3660112	-	RGD-HS/4/SN											
3660113	-	RGD-HS/4/MB											
3660114	-	RGD-HS/6/SN											
3660115	-	RGD-HS/6/MB											
3660116	-	RGD-HS/8/SN											
3660117	-	RGD-HS/8/MB											
3660118	-	RGD-HS/11/SN											
3660119	-	RGD-HS/11/MB											
3660120	-	RGD-HS/4/TC/KIT											
3660121	-	RGD-HS/5/6/TC/KIT											

