# OHY Convection and Fan Heater



Surface





€₽

Training available online www.ouellet.com

Colt S

# **Features**

#### Color

- Standard: white, almond.
- Optional (upcharge applicable): metallic silver, bronze,
- metallic charcoal, aluminum, semi-gloss black, sand. Custom colors available upon request.

# Finish

• Standard: epoxy/polyester powder paint.

# Voltage

• 240V, 1-phase.

### Construction

- Cast aluminum front cover.
- Steel bar grilles prevent the insertion of foreign objects; smooth-finish paint is washable and anti-yellowing.
- Automatic reset safety device. • Built-in white LED night light. 1

- Fan
- Whisper-quiet squirrel-cage fan.
- Factory-lubricated motor.

# Model

Watts	Volts	Product #	Price	Weight	
				lb	kg
2000 <sup>1</sup>	240	OHY2000-TH <sup>1</sup>	743.00	22.75	10.3

# Option

Product # Kit	Product # Factory installed*	Price	Description
KIT-OHY-DIS <sup>2</sup>	DIS <sup>2</sup>	108.00	Disconnect switch, 20A at 250V

\* For factory installed options, add the option number to the product number. See the Product Code section inside the front cover.

BEWARE: Not available for 208V.

<sup>2</sup> For the U.S. only: The nominal current of the unit must not exceed 80% of the capacity

of the disconnect.

Add"BL" for white, "AM" for almond.

Upcharge available for optional colors shown in the color chart section. Electronic thermostat available in grey only.

#### Heating element

- Helical coil nickel-chromium alloy wire protected by ceramic insulators.
- Heating element provides instant heat.

SP

# Control

- Built-in electronic digital thermostat/timer. 2
- Thermostat mode: pulse modulation: automatic convection to fan-forced switch-over at 1000W.
- Timer mode: 5-30 minutes full power fan-forced boost. 3

# Installation

- 4 in. (102 mm) minimum clearance to floor.
- May be surface-mounted or recessed in 2 in. X 3 in. stud partitions.
- Mounting holes for ease of installation.
- Large wiring compartment.

## Warranty

• 5-year warranty against defects.


550 mm

21 5/8

Recessed

#### Application

• Bathroom, kitchen, family room, entrance way.

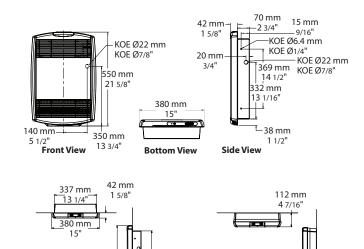

470 mm

18 1/2"

Wall-Mounted