



# LS2-SERIES 9" LINEAR STRIP



Catalog #	
Project	
Date	
Prepared by	
Model #	<b>LS2-93-4</b>

## OVERVIEW

The LS2-Series Linear Strip is a dimmable, low profile solution for any cove or undercabinet project. Available in a variety of lengths with the ability to connect up to 10 strips on one pass, they are the most versatile way to give your project a custom look.

## PRODUCT HIGHLIGHTS

- Up to 450 lumen per foot
- Direct AC 120V Input
- T5 shape for retrofit applications
- Polycarbonate lens cover
- High strength aluminum for durability and optimum heat dissipation
- Available in 9", 14", 23" 35" and 47" lengths


### OPTICAL SPECIFICATIONS

Lumen Output (lm) <sub>1</sub>	240 lm	Efficacy (lm/W) <sub>1</sub>	>70 lm/W
CCT (K) <sub>1</sub>	4000K	Beam Angle (°) <sub>1</sub>	160°
CRI (Ra) <sub>1</sub>	>80	Projected Lifetime (L <sub>70</sub> )	>30,000 hrs

### ELECTRICAL SPECIFICATIONS

Power	4W	Input Voltage <sub>2</sub>	100-120VAC
Apparent Power (VA)	4VA	Current Draw at 120V <sub>AC</sub> (A) <sub>2</sub>	40mA
System Wattage (W)	3.2W		

### PRODUCT DIMENSIONS

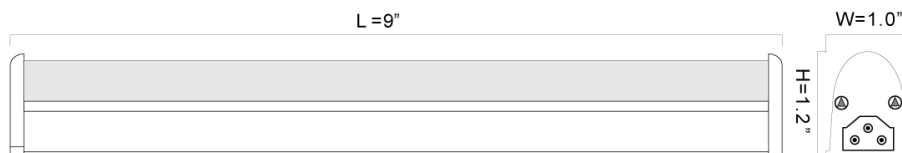

## LED & DRIVER SPECIFICATIONS

<b>LED Design Origin</b>	China	<b>Power Factor</b>	>0.8
<b>LED Type</b>	SMD 2835	<b>THD</b>	<20%
<b>Dimmable <sub>3</sub></b>	Yes (Triac or Single Phase)		

CONSTRUCTION	APPROVALS & LISTINGS
--------------	----------------------

<b>Housing Material</b>	Aluminum	<b>UL/ETL Listed</b>	cULus
<b>Housing Color</b>	White	<b>UL/ETL File Number</b>	E498668

ILLUMINANCE AT A DISTANCE
---------------------------

<b>Lens Material</b>	Polycarbonate		
<b>Dimensions (inch/mm)</b>	9" x 1" x 1.2" (228mm x 25mm x 30mm)		
<b>Weight (kg/lbs)</b>	140g / 5 oz		
<b>Installation Method</b>	Bracket Mount (included) Double-ended connector (included)  Must also use (not included): Junction Box (LS2-JBx) or Power Cord (LS2-PC6) to connect to electrical source		
<b>Operation Range (°C/°F)</b>	-4°F to 104°F -20°C to 40°C		
<b>Warranty <sub>4</sub></b>	5 Years		
		<b>6.6ft / 2M</b>	<b>1.52 fc / 16.33 LUX</b>
		<b>9.8ft / 3M</b>	<b>0.67 fc / 7.26 LUX</b>
		<b>13.1ft / 4M</b>	<b>0.38 fc / 4.08 LUX</b>
		<b>16.4ft / 5M</b>	<b>0.24 fc / 2.61 LUX</b>
		<b>19.7ft / 6M</b>	<b>0.17 fc / 1.81 LUX</b>

OPTIONAL ACCESSORIES
----------------------

<b>LS2-PC6</b>	72" AC Power Cord for LS2	<b>LS2-JB</b>	Junction Box for LS2, 120VAC
<b>LS2-CON12</b>	12" Interconnecting Wire for LS2	<b>LS2-JBS</b>	Junction Box with Switch for LS2, 120VAC
<b>LS2-CON36</b>	36" Interconnecting Wire for LS2		

1. Due to the special conditions of manufacturing, the typical data of optical specifications can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.  
 2. Exceeding maximum ratings for input voltage and current will cause hazardous overload and will likely destroy the LED fixture.  
 3. Refer to the list of recommended dimmers for details.  
 4. Refer to Warranty Terms & Conditions available at [premiseled.com/warranty](http://premiseled.com/warranty)