

| | |
|-------------|---------------|
| Project | |
| Date | |
| Prepared By | |
| Model # | HBU240WSCCTB5 |

Specifications

ELECTRICAL

Watts: 150, 200, 240
 Voltage: 120/277V, 347V
 Power Factor: ≥ 0.9 THD:
 $\leq 20\%$
 Operating Temp. Range:
 -40°C (-40°F) to 50°C (122°F)

LIGHT

Initial Lumens: 32400
 Lumens per Watt: 135
 Color Temperature:
 3500K, 4000K, 5000K
 CRI: 84
 Dimming: 0-10V

AGENCY APPROVALS

UL: Yes
 IP65: Yes
 DLC® Premium: Yes
 ETL Sanitation: Listed to
 NSF STD. 2

PRODUCT DETAILS

Housing:
 Die-cast Aluminum Alloy
Warranty: 5 years
Fixture Warranty Life:
 50,000 hours
Weight: 5.51 lbs
Dimensions:
 7.3" Height, 12.8" Diameter

UFO LED Highbay

Color & Wattage Selectable



ORDER CODE:
 11788

MODEL NUMBER:
 HBU240WSCCTB5

COLOR SELECTABLE:
 3500K, 4000K, 5000K

LUMEN LEVELS:
 20250 lumens - 150 watts
 27000 lumens - 200 watts
 32400 lumens - 240 watts

DLC PRODUCT ID:
 S-SC413E

REBATE AVAILABILITY*

PRODUCT DESCRIPTION


EarthTronics LED Highbay delivers excellent energy savings then replacing up to a 1000 watt HID fixtures. This UFO high bay fixture has a 12.8" diameter design and produces up to 32400 lumens. It features color selection options of 3500K, 4000K or 5000K with a high 80+ CRI providing excellent visual acuity for accuracy when working in manufacturing and warehousing applications. This fixture has a unique open center ventilated LED array afford excellent heat dissipation providing high lumen maintenance over its service life. This UFO Highbay is IP65 rated for wet locations and the housing is corrosion resistant die-cast aluminum. This fixture is also ETL Sanitation Listed (conforms to NSF STD.2) for use in food processing and other clean room applications. 0-10V dimming standard and compatible with several controls. High quality LED chips provide for excellent lumen maintenance. This UFO High Bay ships with a standard 6' 18/3 SJT whip, 0-10v dimming wires and mounting hooks.

PRODUCT FEATURES

- + 120/277V, 347V
- + Feature 3-stage color temperature adjustment, 3-stage brightness adjustment
- + Operating at 135 lumens per watt
- + DLC® 5.1 Technical Requirement
- + ETL Sanitation Listed (conforms to NSF STD.2)
- + Ships with standard 6' 18/3 SJT whip, 1-10v dimming wires and mounting hooks
- + IP65 wet location rated
- + Polycarbonate lens
- + Corrosion resistant die-cast aluminum housing
- + Driver standard with 0-10V dimming (prewired)

Please consult installation instructions for proper application and use of this fixture.
 *Rebate availability access it here: www.earthtronics.com/rebate-finder

PRODUCT DIMENSIONS

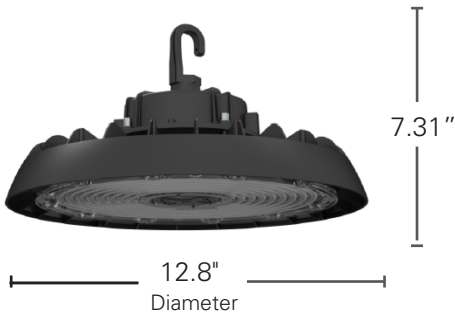

PACKAGE DETAILS


Dimensions: 15.43" x 15.43" x 7.09"
 Weight: 8.2 lbs
 UPC: 840791117880

COLOR & WATTAGE SELECTION OPTIONS

Step 1:
Remove the rubber pad from the driver




Step 2:
Use the slide switch to select wattage and color temperature

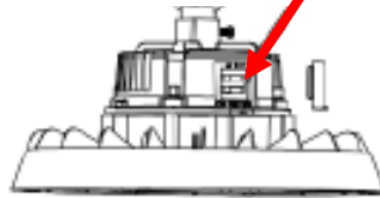


Step 3:
Attach the rubber pad to the driver




OPTIONAL ACCESSORIES



Trunion Mount Order Code: 11794




Wire Guard Order Code: 11798



12VDC Microwave Sensor
Order Code: 11795

*Remote Control Order Code: 11796



PC Reflector
Order Code: 11792



Emergency Battery Pack
Order Code: 11499

* **Note:** One remote control (11796) for multiple microwave sensors.

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Rebate Finder - Highbay UFO](#)

www.earthtronics.com/rebate-finder/catalog/

