

## CAT5E – FT-4


### CAT-5E 350MHZ – UTP CABLE – UNSHIELDED – CSA – FT-4 – UL



Solid Bare Copper Conductors  
Twisted Pairs  
Polyolefin Insulation - Ripcord  
PVC FT-4 Jacket

Provo Part #	Description	Overall Dia.	Put-Up	Weight	Colour Code
24104L5E-350BL	4p 24awg Solid Cat-5E-350MHz <b>Blue</b>	0.200"	300	26	5
24104L5E-350BK	4p 24awg Solid Cat-5E-350MHz <b>Black</b>	0.200"	300	26	5
24104L5E-350GN	4p 24awg Solid Cat-5E-350MHz <b>Green</b>	0.200"	300	26	5
24104L5E-350GY	4p 24awg Solid Cat-5E-350MHz <b>Grey</b>	0.200"	300	26	5
24104L5E-350OR	4p 24awg Solid Cat-5E-350MHz <b>Orange</b>	0.200"	300	26	5
24104L5E-350RD	4p 24awg Solid Cat-5E-350MHz <b>Red</b>	0.200"	300	26	5
24104L5E-350VL	4p 24awg Solid Cat-5E-350MHz <b>Violet</b>	0.200"	300	26	5
24104L5E-350W	4p 24awg Solid Cat-5E-350MHz <b>White</b>	0.200"	300	26	5
24104L5E-350YL	4p 24awg Solid Cat-5E-350MHz <b>Yellow</b>	0.200"	300	26	5
24125L5E-350BL	<b>25p</b> 24awg Solid Cat-5E-350MHz <b>Blue</b>	0.410"	300/150	84/42	5

### DUAL – CAT-5E 350MHZ – UTP CABLE – UNSHIELDED – CSA – FT-4 – UL

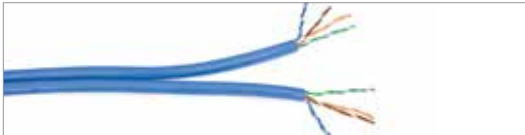

Solid Bare Copper Conductors  
Twisted Pairs  
Polyolefin Insulation - Ripcord  
PVC FT-4 Jacket - **Blue**

Provo Part #	Description	Overall Dia.	Put-Up	Weight	Colour Code
24104L5E-350/2	2x4p 24awg Solid Cat-5E 350 MHz	2x 0.235"	300	50	5

### SHIELDED – CAT-5E 350MHZ – STP CABLE – CSA – FT-4 – UL



Solid Bare Copper Conductors  
Twisted Pairs  
Polyolefin Insulation - Ripcord  
100% Aluminum Foil Shield  
24awg Tinned Copper Drain Wire  
PVC FT-4 Jacket

Provo Part #	Description	Overall Dia.	Put-Up	Weight	Colour Code
24404L5E-350BL	4p 24awg Solid Cat-5E 350Mhz <b>Blue</b>	0.275"	300	30	5
24404L5E-350BK	4p 24awg Solid Cat-5E 350Mhz <b>Black</b>	0.275"	300	30	5
24404L5E-350WH	4p 24awg Solid Cat-5E 350Mhz <b>White</b>	0.275"	300	30	5
24404L5E-350YL	4p 24awg Solid Cat-5E 350Mhz <b>Yellow</b>	0.275"	300	30	5

### STRANDED – CAT-5E 350MHZ – UTP CABLE – UNSHIELDED – CSA – FT-4 – UL



Stranded Bare Copper Conductors  
Twisted Pairs  
Polyolefin Insulation - Ripcord  
PVC FT-4 Jacket

Provo Part #	Description	Overall Dia.	Put-Up	Weight	Colour Code
24744L5E-350BL	4p 24awg 7x32 Stranded 350MHz Cat-5E 350 <b>Blue</b>	0.240"	300	28	5
24744L5E-350GY	4p 24awg 7x32 Stranded 350MHz Cat-5E 350 <b>Grey</b>	0.240"	300	28	5
24744L5E-350WH	4p 24awg 7x32 Stranded 350MHz Cat-5E 350 <b>White</b>	0.240"	300	28	5
24744L5E-350YL	4p 24awg 7x32 Stranded 350MHz Cat-5E 350 <b>Yellow</b>	0.240"	300	28	5

## CAT-6 – FT-4

### CAT-6 550MHZ – UTP CABLE – UNSHIELDED – CSA – FT-4 – UL

Solid Bare Copper Conductors  
Twisted Pairs  
Polyolefin Insulation  
PVC FT-4 Jacket



Provo Part #	Description	Overall Dia.	Put-Up	Weight	Colour Code
<b>24104L6-BL</b>	4p 23awg Solid 550MHz Cat-6 <b>Blue</b>	0.235"	300	28	5
<b>24104L6-BK</b>	4p 23awg Solid 550MHz Cat-6 <b>Black</b>	0.235"	300	28	5
<b>24104L6-BR</b>	4p 23awg Solid 550MHz Cat-6 <b>Brown</b>	0.235"	300	28	5
<b>24104L6-GN</b>	4p 23awg Solid 550MHz Cat-6 <b>Green</b>	0.235"	300	28	5
<b>24104L6-GY</b>	4p 23awg Solid 550MHz Cat-6 <b>Grey</b>	0.235"	300	28	5
<b>24104L6-OR</b>	4p 23awg Solid 550MHz Cat-6 <b>Orange</b>	0.235"	300	28	5
<b>24104L6-RD</b>	4p 23awg Solid 550MHz Cat-6 <b>Red</b>	0.235"	300	28	5
<b>24104L6-VL</b>	4p 23awg Solid 550MHz Cat-6 <b>Violet</b>	0.235"	300	28	5
<b>24104L6-WH</b>	4p 23awg Solid 550MHz Cat-6 <b>White</b>	0.235"	300	28	5
<b>24104L6-YL</b>	4p 23awg Solid 550MHz Cat-6 <b>Yellow</b>	0.235"	300	28	5
<b>24104L6-SA</b>	4pr 23awg Solid Cat-6 550Mhz <b>Aluminum Interlocked Armour</b>	0.360"	300/150	55/28	5
<b>24104L6-SAJ</b>	4pr 23awg Solid Cat-6 550Mhz <b>Aluminum Interlocked Armour w/ Overall Blue Jacket</b>	0.395"	300/150	60/30	5

### DUAL – CAT-6 550MHZ – UTP CABLE – UNSHIELDED – CSA – FT-4 – UL

Solid Bare Copper Conductors  
Twisted Pairs  
Polyolefin Insulation - Ripcord  
PVC FT-4 Jacket



Provo Part #	Description	Overall Dia.	Put-Up	Weight	Colour Code
<b>24104L6/2</b>	2x4p 23awg Solid Cat-6 550MHz	2x 0.250"	300	56	5

### SHIELDED – CAT-6 500MHZ – STP CABLE – CSA – FT-4 – UL

Solid Bare Copper Conductors  
Twisted Pairs  
Polyolefin Insulation  
100% Aluminum Foil Shield  
24awg Tinned Copper Drain Wire  
PVC FT-4 Jacket



Provo Part #	Description	Overall Dia.	Put-Up	Weight	Rating	Colour Code
<b>24404L6-BL</b>	4p 23awg Solid Cat-6 <b>Blue</b>	0.260"	300	28	FT-4	5
<b>24404L6-BK</b>	4p 23awg Solid Cat-6 <b>Black</b>	0.260"	300	28	FT-4	5
<b>24404L6-WH</b>	4p 23awg Solid Cat-6 <b>White</b>	0.260"	300	28	FT-4	5
<b>24404L6-YL</b>	4p 23awg Solid Cat-6 <b>Yellow</b>	0.260"	300	28	FT-4	5

## IN-WALL SPEAKER CABLE – FT-4

### IN-WALL SPEAKER CABLE – CSA – CMG FT-4 – UL – OXYGEN FREE COPPER

Good Quality



Stranded Bare Copper  
Twisted Conductors

PVC Insulation  
PVC Jacket: -20° C + 105° C

Provo Part #	Description	Overall Dia.	Voltage	Put-Up	Weight	Colour Code
<b>18 AWG IN-WALL</b>						
9182B	2c 18awg 16x30 Stranded <b>Light Brown</b>	0.212"	300	305	26	2
9182B-BK	2c 18awg 16x30 Stranded <b>Black</b>	0.212"	300	305	26	2
9182B-W	2c 18awg 16x30 Stranded <b>White</b>	0.212"	300	305	26	2
9184B	4c 18awg 16x30 Stranded <b>Dark Brown</b>	0.244"	300	152	22	2
9184B-W	4c 18awg 16x30 Stranded <b>White</b>	0.244"	300	152	22	2
<b>16 AWG IN-WALL</b>						
9162B	2c 16awg 26x30 Stranded <b>Light Green</b>	0.228"	300	305/152	36/18	2
9162B-BK	2c 16awg 26x30 Stranded <b>Black</b>	0.228"	300	305/152	36/18	2
9162B-W	2c 16awg 26x30 Stranded <b>White</b>	0.228"	300	305/152	36/18	2
9162B-YL	2c 16awg 26x30 Stranded <b>Yellow</b>	0.228"	300	305/152	36/18	2
9164B	4c 16awg 26x30 Stranded <b>Dark Green</b>	0.263"	300	305/152	54/27	2
9164B-BK	4c 16awg 26x30 Stranded <b>Black</b>	0.263"	300	305/152	54/27	2
9164B-W	4c 16awg 26x30 Stranded <b>White</b>	0.263"	300	305/152	54/27	2
<b>14 AWG IN-WALL</b>						
9142B	2c 14awg 41x30 Stranded <b>Light Blue</b>	0.276"	300	305/152	50/25	2
9142B-BK	2c 14awg 41x30 Stranded <b>Black</b>	0.276"	300	305/152	50/25	2
9142B-W	2c 14awg 41x30 Stranded <b>White</b>	0.276"	300	305/152	50/25	2
9144B	4c 14awg 41x30 Stranded <b>Dark Blue</b>	0.319"	300	305/152/76	88/44/22	2
9144B-BK	4c 14awg 41x30 Stranded <b>Black</b>	0.319"	300	305/152/76	88/44/22	2
9144B-W	4c 14awg 41x30 Stranded <b>White</b>	0.319"	300	305/152/76	88/44/22	2
<b>12 AWG IN-WALL</b>						
9122B	2c 12awg 65x30 Stranded <b>Yellow</b>	0.318"	300	305/152/76	18/9/5	2
9122B-BK	2c 12awg 65x30 Stranded <b>Black</b>	0.318"	300	305/152/76	18/9/5	2
9122B-W	2c 12awg 65x30 Stranded <b>White</b>	0.318"	300	305/152/76	18/9/5	2
9124B	4c 12awg 65x30 Stranded <b>Yellow</b>	0.370"	300	76	31	2
9124B-W	4c 12awg 65x30 Stranded <b>White</b>	0.370"	300	76	31	2
<b>10 AWG IN-WALL</b>						
9102B-BK	2c 10awg 105x30 Stranded <b>Black</b>	0.380"	300	76	25	2

### X-FLEX IN-WALL SPEAKER CABLE – CSA – CMG FT-4 – OXYGEN FREE COPPER – HIGH STRAND COUNT

Best Quality



Stranded Bare Copper Twisted Conductors  
PVC Insulation

Extra Flexible PVC Jkt: -20° C + 105° C

Provo Part #	Description	Overall Dia.	Voltage	Put-Up	Weight	Colour Code
<b>16 AWG X-FLEX IN-WALL</b>						
XFL2-16	2c 16awg 65x34 Stranded <b>Beige</b>	0.255"	300	152	25	2
XFL2-16-P	2c 16awg 65x34 Stranded <b>Pink</b>	0.255"	300	152	25	2
XFL4-16	4c 16awg 65x34 Stranded <b>Orange</b>	0.305"	300	152	27	2
XFL4-16-T	4c 16awg 65x34 Stranded <b>Green</b>	0.305"	300	152	27	2
<b>14 AWG X-FLEX IN-WALL</b>						
XFL2-14	2c 14awg 105x34 Stranded <b>Brown</b>	0.300"	300	152	22	2
XFL2-14-YL	2c 14awg 105x34 Stranded <b>Yellow</b>	0.300"	300	152	22	2
XFL4-14	4c 14awg 105x34 Stranded <b>Purple</b>	0.343"	300	76	18	2
XFL4-14-GOLD	4c 14awg 105x34 Stranded <b>Gold</b>	0.343"	300	76	18	2
<b>12 AWG X-FLEX IN-WALL</b>						
XFL2-12	2c 12awg 265x34 Stranded <b>Burgundy</b>	0.464"	300	76	36	2
XFL4-12	4c 12awg 265x34 Stranded <b>Burgundy</b>	0.510"	300	76	48	2