

THIS COPY IS PROVIDED ON	A RESTRICTED BASIS AND IS NOT TO BE USI	D IN ANY WAY DI	ETRIMENTA	AL TO THE INT	TERESTS OF	PANDUIT CO	DRP.
Material	High Conductivity Seamless Copper Tube						
Plating	Electro-Tin						
Wire Size	14 - 10 AWG STR, 12 - 10 AWG SOL					/	
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric						$\overline{}$
Wire Strip Length	9/16 in.			$\uparrow \uparrow $	0		1
Stud Size	1/4 in.	.42±.04			4 <u>-</u>	ij	
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.25±.04 -		.63	±.02		
UL Temperature Rating	90°C		•		1.9	93±.06 ——	
C.S.A Certified Wire Connector	Yes						
Panduit Color Code on Barrel	N/A						
Panduit Die Index No. on Barrel	N/A						
Alternate Industry Die Index No. ( ) on Barrel	N/A		W	ire inspection	on windov	w	





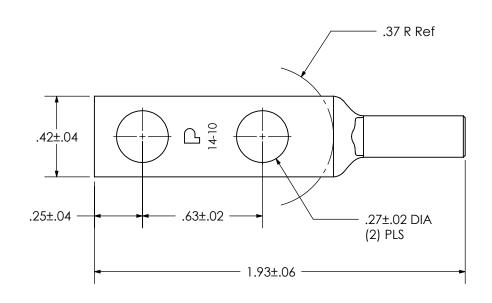

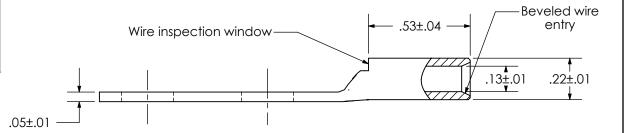

						PANDUIT CORP. TINLEY PARK, ILLINOIS
02	12/04	JHNU	JHNU	REVISED WIRE SIZE	12305	LCC10-14AW-L Copper Lug - Two-Hole, Long Barrel with Window
REV	DATE	ВҮ	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCC10-14AW-CUST