Satisfy Professional's Needs







High pressure inflation upto 1,100 kPa.

Air Discharge Amount (at High speed mode) **MP001G DMP181** [200kPa] [200kPa] L/min L/min





Θ

Thakita.

SX SILE



photo: MP001G



makita

Ideal for infla



DMP181



MP001G

AOV Lision

MP001G

DMP181 24 [200kPa] L/min 22 [200kPa] L/min


tile



Digital pressure gauge with backlight

• Easier to read, larger display

• Both current and target pressure values can be simultaneously displayed. Overheat warning lamp blinks, and the machine automatically turns off.

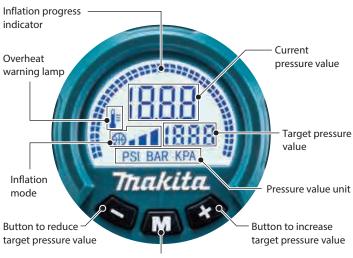

3 Inflation modes

Mode	Display	Purpose	Adjustable pressure range	
High speed		To inflate objects in high speed	35 to 1,100 kPa	
Low speed		To inflate objects in low speed	(5 to 160 PSI)	
Ball		To inflate balls	35 to 110 kPa (5 to 16 PSI)	

Air release function


In case of over-inflation, or if user wants to reduce the air pressure of road bike tires according to road conditions, press and hold the air release button to release air.




Air release button

Inflation mode change button

ating tires of trucks and large vehicles etc.

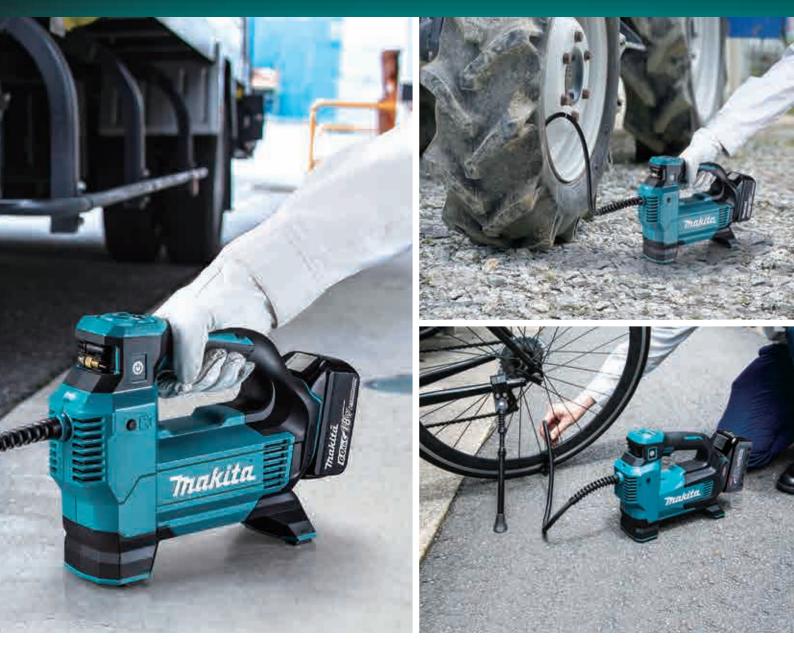



LED job light for easy operation at dark places.



Storing hose The hose can be attached to the hose holder of the tool.



Adapter holder



Backlight



XPT

eXtreme Protection Technology

Inflating from partially full to full

Objects Conditions	Regular car tire size: 215/60R16, 150→250kPa, High speed mode		Light truck tire size: 205/70R16, 500→600kPa, High speed mode		Medium truck tire size: 225/80R17.5, 700→800kPa, High speed mode	
Model (Battery)	MP001G (BL4040)	DMP181 (BL1860B)	MP001G (BL4040)	DMP181 (BL1860B)	MP001G (BL4040)	DMP181 (BL1860B)
Work speed	1.1 min	1.3 min	1.8 min	1.9 min	3 min	3.7 min
Work amount on a full battery charge	50 times	35 times	22 times	18 times	13 times	9 times