


UltraLite® Equipment Pads

Product 2" / 3" Equipment Pads

Application Designed for use as external/internal ground support for HVAC equipment. Where local codes supersede the national code and require a pad thicker than 2", use a 3" thick pad.

- Advantages**
- The lightest weight cement pad for durability and ease of handling
 - Domestic - Made in the USA!
 - Freeze/thaw, UV, chemical & flame resistant for long-term life outdoors
 - A textured surface helps prevent unit slide and presents an attractive appearance

- General Specifications**
- **Gray Cement Color**
 - Composed of Type I expanded polystyrene foam (EPS) and a cement slurry
 - Successfully tested per ASTM D2299 and does not crack, flake, or warp when tested with the following:
 - o R-22 and R-134a
 - o Synthetic canine urine
 - o Compressor oil
 - o Salt solution, 20% by volume
 - Successfully tested to ASTM C67 under 25-cycle regimen specified
 - Vibration absorbing
 - DiversiTech Limited Lifetime Warranty

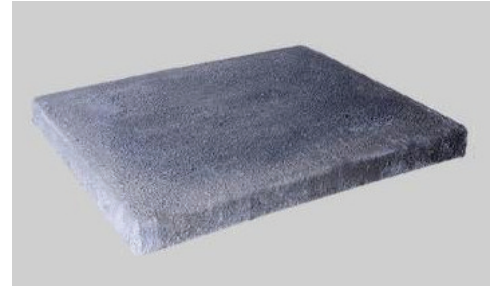

General Characteristics

Catalog Number	Size	Estimated Allowable Load	Quantity Per Pallet	Pad Weight
UC1636-2	16x36x2	173 LBS	20	11 LBS
UC2424-2	24x24x2	173 LBS	20	15 LBS
UC2430-2	24x30x2	216 LBS	20	17 LBS
UC2436-2	24x36x2	259 LBS	20	22 LBS
UC2448-2	24x48x2	346 LBS	20	18 LBS
UC2626-2	26x26x2	203 LBS	20	17 LBS
UC2628-2	26x28x2	218 LBS	20	19 LBS
UC2636-2	26x36x2	281 LBS	20	21 LBS
UC3030-2	30x30x2	270 LBS	20	21 LBS
UC3036-2	30x36x2	324 LBS	20	27 LBS
UC3040-2	30x40x2	360 LBS	20	30 LBS
UC3143-2	31x43x2	400 LBS	20	26 LBS
UC3232-2	32x32x2	307 LBS	20	24 LBS
UC3234-2	32x34x2	326 LBS	20	23 LBS
UC3237-2	32x37x2	355 LBS	20	28 LBS
UC3434-2	34x34x2	347 LBS	20	23 LBS
UC3445-2	34x45x2	459 LBS	20	45 LBS
UC3636-2	36x36x2	389 LBS	20	27 LBS
UC3640-2	36x40x2	432 LBS	20	29 LBS
UC3648-2	36x48x2	518 LBS	20	35 LBS
UC3842-2	38x42x2	479 LBS	20	30 LBS
UC4040-2	40x40x2	480 LBS	20	32 LBS
UC4147-2	41x47x2	578 LBS	20	39 LBS

To utilize maximum load rating the weight should be evenly distributed across the pad surface



UltraLite® Equipment Pads

Catalog Number	Size	Estimated Allowable Load	Quantity Per Pallet	Pad Weight
UC1636-3	16x36x3	173 LBS	15	18 LBS
UC2424-3	24x24x3	173 LBS	15	18 LBS
UC2430-3	24x30x3	216 LBS	15	21 LBS
UC2436-3	24x36x3	259 LBS	15	26 LBS
UC2442-3	24x42x3	302 LBS	15	28 LBS
UC2448-3	24x48x3	346 LBS	15	28 LBS
UC2626-3	26x26x3	203 LBS	15	17 LBS
UC2636-3	26x36x3	281 LBS	15	29 LBS
UC2660-3	26x60x3	468 LBS	15	55 LBS
UC2838-3	28x38x3	319 LBS	15	30 LBS
UC3030-3	30x30x3	270 LBS	15	23 LBS
UC3036-3	30x36x3	324 LBS	15	30 LBS
UC3040-3	30x40x3	360 LBS	15	33 LBS
UC3048-3	30x48x3	432 LBS	15	40 LBS
UC3060-3	30x60x3	540 LBS	15	63 LBS
UC3232-3	32x32x3	307 LBS	15	26 LBS
UC3237-3	32x37x3	355 LBS	15	27 LBS
UC3353-3	33x53x3	525 LBS	15	68 LBS
UC3434-3	34x34x3	326 LBS	15	27 LBS
UC3445-3	34x45x3	459 LBS	15	39 LBS
UC3465-3	34x65x3	663 LBS	15	71 LBS
UC3636-3	36x36x3	389 LBS	15	34 LBS
UC3642-3	36x42x3	454 LBS	15	32 LBS
UC3648-3	36x48x3	518 LBS	15	37 LBS
UC3650-3	36x50x3	540 LBS	15	38 LBS
UC3654-3	36x54x3	583 LBS	15	71 LBS
UC3660-3	36x60x3	648 LBS	15	49 LBS
UC3678-3	36x78x3	842 LBS	15	99 LBS
UC3842-3	38x42x3	479 LBS	15	35 LBS
UC3865-3	38x65x3	741 LBS	15	85 LBS
UC3870-3	38x70x3	798 LBS	15	113 LBS
UC4040-3	40x40x3	480 LBS	15	34 LBS
UC4042-3	40x42x3	504 LBS	15	36 LBS
UC4054-3	40x54x3	648 LBS	15	81 LBS
UC4347-3	43x47x3	606 LBS	15	60 LBS
UC4550-3	45x50x3	675 LBS	15	81 LBS
UC4558-3	45x58x3	783 LBS	15	93 LBS
UC4848-3	48x48x3	691 LBS	15	85 LBS
UC4854-3	48x54x3	778 LBS	15	91 LBS
UC4866-3	48x66x3	950 LBS	15	108 LBS
UC5053-3	50x53x3	795 LBS	15	92 LBS
UC5056-3	50x56x3	840 LBS	15	97 LBS
UC5075-3	50x75x3	1125 LBS	15	130 LBS
UC5079-3	50x79x3	1185 LBS	15	145 LBS
UC5252-3	52x52x3	811 LBS	15	94 LBS
UC5260-3	52x60x3	936 LBS	15	109 LBS
UC5557-3	55x57x3	941 LBS	15	109 LBS
UC6067-3	60x67x3	1206 LBS	15	134 LBS

To utilize maximum load rating the weight should be evenly distributed across the pad surface