

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

WCI-L GEN 2

MINI WALL PACK

CCT Selectable and Integrated Photocell

ORDERING INFORMATION

Order code: 68988
Model number: WCI-LS2B-W-3C-BR-P
UPC: 069549023130
Case quantity: 1
DLC unique ID: PDEZ4M7J

PHYSICAL DATA

Dimensions in. (mm): 5 5/8" x 8 5/8" x 3 1/8" (147 x 218 x 78 mm)
Lens material: Polycarbonate Frosted Lens
Finish: Bronze
Housing material: Aluminum Die Cast
Mounting: Surface mount to a junction box or use with surface conduit

PERFORMANCE DATA

Watts (W): 20
Volts (VAC): 120-277
Color temperature (K)¹: 3 000/4 000/5 000
Lumen output (lm)²: 2 560
Efficacy (lm/W): 135
CRI: 80
Life L70 (h)³: 54 000
Tested LM-80 (h)³: 9 000
Dimming (Yes/No): Yes
Power factor: ≥0.90
THD (%): <20
Frequency (Hz): 50/60
Surge protection (kV): 2
Operating temp. range: -40 to 50°C

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations



3 000/4 000/5 000 K



LED
fixture



dimmable
fixture



wet
location




ICES
005



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.

DIMENSIONS AND WEIGHTS

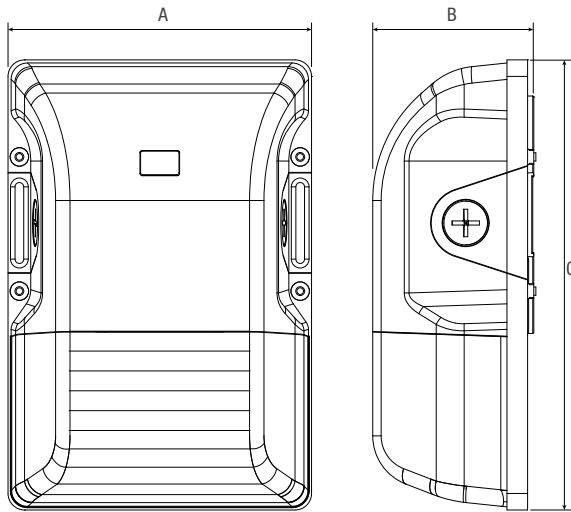

	20 W
A in. (cm)	5 3/4 (14.7)
B in. (cm)	3 1/8 (7.8)
C in. (cm)	8 5/8 (21.8)
Weight (lbs)	2.2

LUMEN SPECIFICATION TABLE

Order code	Model number	Watts (W)	3 000 K			4 000 K			5 000 K		
			Lumen output (lm)	Efficacy (lm/W)	LED Current (mA)	Lumen output (lm)	Efficacy (lm/W)	LED Current (mA)	Lumen output (lm)	Efficacy (lm/W)	LED Current (mA)
68988	WCI-LS2B-W-3C-BR-P	20	2 560	135	0.18	2 921	147	0.18	2 703	137	0.18


DEFAULT PROGRAMMING

68988: 4 000 K

PHOTOMETRIC DATA¹

68988 • 4 000 K • 2 921 lm

Polar candela distribution

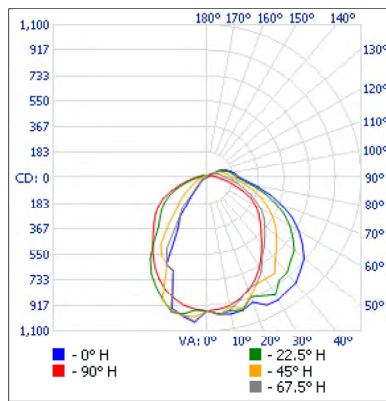

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	734.1	25.2
0-40	1 156.5	39.6
0-60	1 941.1	66.5
60-90	692.0	23.7
70-100	469.4	16.1
90-120	223.4	7.7
0-90	2 633.1	90.2
90-180	284.5	9.8
0-180	2 917.6	100

Illuminance at a distance

Center beam fc	Beam width
8.3'	13.9
16.7'	3.43
25'	1.53
33.3'	0.86
41.7'	0.55
50'	0.38

Beam width	Beam width
20'	17.2'
40.1'	34.6'
60.1'	51.8'
80.1'	69.1'
100.3'	86.5'
120.2'	103.7'

■ Vert. spread: 100.5°
■ Horiz. spread: 92.1°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.