



Simply Brilliant



Product information

FEATURES

- 15w 1800LM, 30w 3600LM, 50w 5500LM
- One (1) meter cable included
- DLC, cUL listed
- 60,000 hour life (L70@25°C)
- 120LmW High Lumens Efficacy
- NEMA 6x5 distribution
- Die cast aluminum housing
- Integrated thermal management
- Suitable for wet locations
- Rated for IP65
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

APPLICATION

- Advertising signage
- Entrances and Walkways
- Buildings
- Pathway & Perimeter Lighting
- Commercial
- Playground


INSTALLATION

- U-Bracket mount
- 1m cable included

ADDITIONAL INFO

- Dark Bronze Finish
- Operating Temp. -40°C ~+45°C
- Optional: Photocell Sensor

DIAGRAM

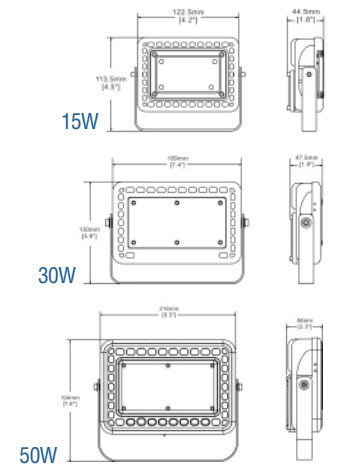

ORDER CODE	DLC ID	DESCRIPTION	WATTS	LUMENS	VOLT	CCT (K)	BEAM ANGLE	PF	MOL (IN)	CASE QTY.
L6320-2130	PJOS8L8J	LED FLOOD 15W 120V YOKE MT.	15W	1800	100-277V	4000K	120°	0.95	6.42x4.8x2.64	28
L6320-2150	PR3IDX8F	LED FLOOD 15W 120V YOKE MT.	15W	1800	100-277V	5000K	120°	0.95	6.42x4.8x2.64	28
L6320-2230	PSBDQ7UU	LED FLOOD 30W 120V YOKE MT.	30W	3600	100-277V	4000K	120°	0.95	8.98x6.1x2.56	20
L6320-2250	PPMIRU0A	LED FLOOD 30W 120V YOKE MT.	30W	3600	100-277V	5000K	120°	0.95	8.98x6.1x2.56	20
L6320-2330	PYQOCBZ2	LED FLOOD 50W 120V YOKE MT.	50W	5500	100-277V	4000K	120°	0.95	10.16x7.72x3.03	14
L6320-2350	PY2YOPUF	LED FLOOD 50W 120V YOKE MT.	50W	5500	100-277V	5000K	120°	0.95	10.16x7.72x3.03	14