





Simply Brilliant

### Product information

#### FEATURES

Attaches easily and seamlessly to most 4" slim panels with diameter 120-125mm  
6 Pack Blister Packaging

DIAGRAM

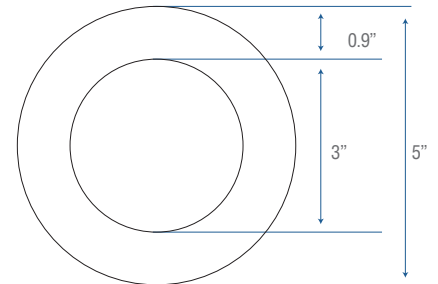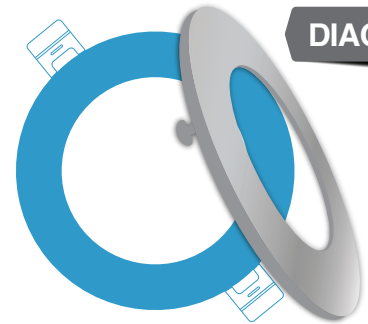

ORDER CODE	MODEL NO.	DESCRIPTION	CASE QTY.
L3799-1104-BX6	ILX-SP4-BN	SNAP-ON TRIM 4" R BN 6PK ROUND 4 INCH BRUSHED NICKEL FITS MOST 120-125MM 4 INCH ROUND SLIMS	576
L3799-1204-BX6	ILX-SP4-BK	SNAP-ON TRIM 4" R BK 6PK ROUND 4 INCH BLACK FITS MOST 120-125MM 4 INCH ROUND SLIMS	576



**The freedom of Color Changing Temperature (CCT)!**

Selectable Color Temperatures of 3000K/4000K/5000K



### Product information

#### FEATURES

- 6" 12W 1000lm
- Selectable color temperatures of 3000K/4000K/5000K
- Fire rated 2H FT4 cable
- Suitable for wet locations
- Energy Star, cETLus listed
- Type IC rated (direct contact with insulation)
- Dimmable
- Less than 0.1% defective rate
- 50,000 hour life
- Acrylic PMMA light guide
- Air-tight aluminum housing
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

#### APPLICATION

- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom


#### INSTALLATION

- Recessed
- Insulated/drop ceilings
- Fits under studs and in narrow plenums


#### ADDITIONAL INFO

- White Finish
- Operating Temperature -10°C ~+40°C

#### DIAGRAM

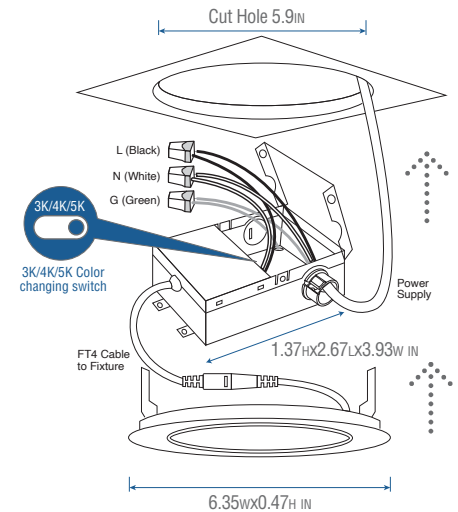

ORDER CODE	ENERGY STAR LISTING CODE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	PF	MOL (IN)	MOUNT SIZE (IN)	CASE QTY.
L3506-5193	ILX-SP-12W-3CCT-WL	SP PRO 6"R 12W 3CCT 1000LM FT4 WET	12	120 V	1000	3000K/4000K/5000K	50,000	110°	82	54	0.94	6.35	5.9	40

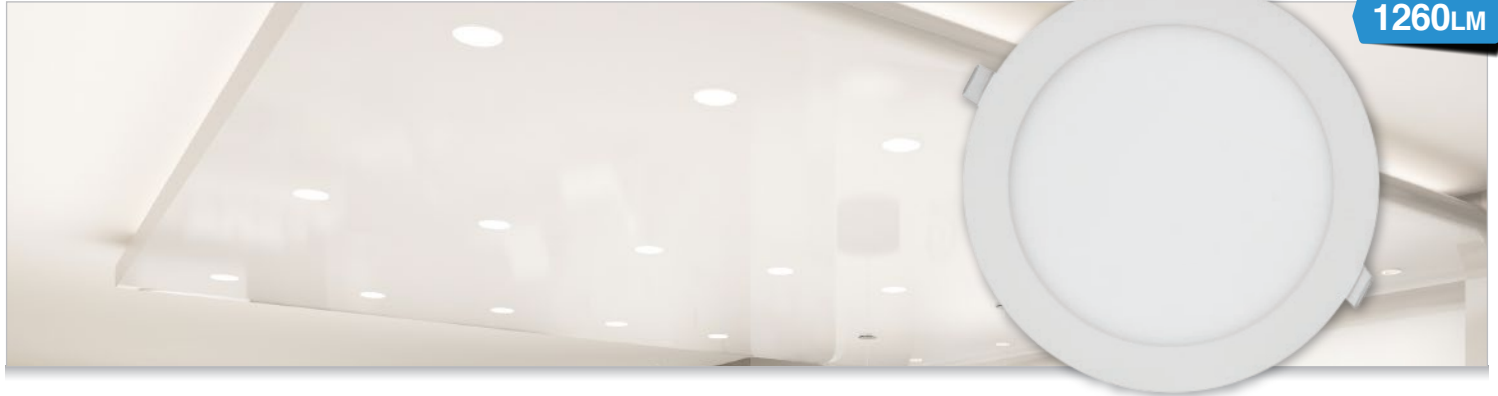

1260LM

# Simply Bright!



High CRI



Dimmable



## Product information

### FEATURES

- 8" 18W 1260lm
- **Type IC rated** (direct contact with insulation)
- **Energy Star, cETLus listed**
- Dimmable
- 50,000 hour life
- 18W replaces 120W halogen
- Acrylic PMMA light guide
- Air-tight aluminum housing
- Suitable for damp locations
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

### APPLICATION

- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom


### INSTALLATION

- Recessed
- Insulated/drop ceilings
- Fits under studs and in narrow plenums

### ADDITIONAL INFO

- White Finish/Nicklet Trim Avail.
- Operating Temperature -10°C ~+40°C

### DIAGRAM

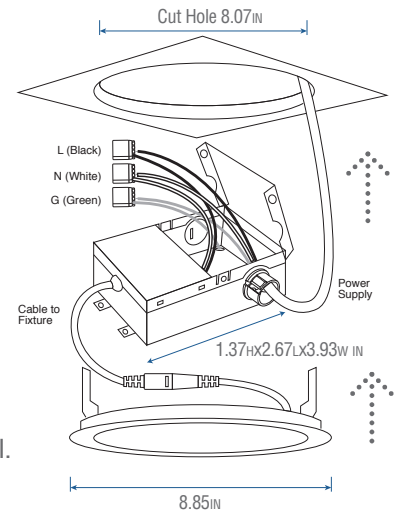

ORDER CODE	ENERGY STAR LISTING CODE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	PF	MOL (IN)	MOUNT SIZE	CASE QTY.
L3508-181R	YG-YGCL-18X-ETL(3000K)	ILLX SLMP 8"R 18W 3K 1260L WH	18	120 V	1260	3000	50,000	180°	80+	44	0.98	8.85	8.07	10
L3508-182R	YG-YGCL-18X-ETL(4000K)	ILLX SLMP 8"R 18W 4K 1260L WH	18	120 V	1260	4000	50,000	180°	80+	44	0.98	8.85	8.07	10
L3508-183R	YG-YGCL-18X-ETL(5000K)	ILLX SLMP 8"R 18W 5K 1260L WH	18	120 V	1260	5000	50,000	180°	80+	44	0.98	8.85	8.07	10

Exclusive National Distributor



Toronto | Calgary | Halifax

Tel: 1-905-264-1125 Toll Free: 1-800-361-7820 Fax: 1-905-264-1175

Email: [information@interadwes.com](mailto:information@interadwes.com) | Website: [www.interadwes.com](http://www.interadwes.com)

Head Office: 1-180 New Huntington Road, Vaughan, ON L4H 0P5