



load monitoring basis current range 20 A / 40 °C control voltage 24 V DC output NO for semiconductor relay / contactor

<b>product brand name</b>	SIRIUS
<b>product designation</b>	load monitoring, basis
<b>manufacturer's article number</b>	
• _1 of the accessories that can be ordered	<a href="#">3RF2900-0RA88</a>
<b>product designation</b>	
• _1 of the accessories that can be ordered	sealable end cover
<b>General technical data</b>	
<b>product function</b>	solid-state relay / solid-state contactor 3RF2
<b>power loss [W] for rated value of the current</b>	
• without load current share typical	0.6 W
<b>insulation voltage rated value</b>	600 V
<b>degree of pollution</b>	3
<b>shock resistance according to IEC 60068-2-27</b>	15g / 11 ms
<b>vibration resistance according to IEC 60068-2-6</b>	2g
<b>design of the switching function</b>	transistor
<b>reference code according to EN 61346-2</b>	B
<b>reference code according to IEC 81346-2</b>	B
<b>Substance Prohibitance (Date)</b>	05/01/2012
<b>Main circuit</b>	
<b>number of poles for main current circuit</b>	0
<b>number of NO contacts for main contacts</b>	0
<b>number of NC contacts for main contacts</b>	0
<b>type of voltage</b>	DC
<b>operating frequency rated value</b>	50 ... 60 Hz
<b>relative symmetrical tolerance of the operating frequency</b>	10 %
<b>operational current</b>	
• at AC-51 rated value	20 A
<b>derating temperature</b>	40 °C
<b>Control circuit/ Control</b>	
<b>type of voltage</b>	DC
<b>control supply voltage at DC rated value</b>	18 ... 30 V
<b>control supply voltage 1</b>	
• at DC rated value	24 V
• at DC	24 V
<b>control supply voltage at DC full-scale value for signal&lt;0&gt; recognition</b>	5 V
<b>control current at minimum control supply voltage</b>	
• at DC	2 mA
<b>control current at DC rated value</b>	25 mA
<b>Auxiliary circuit</b>	

number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0

Installation/ mounting/ dimensions	
<b>fastening method</b>	clip-on
• side-by-side mounting	Yes
<b>height</b>	101.5 mm
<b>width</b>	22.5 mm
<b>depth</b>	67 mm

Connections/ Terminals	
<b>type of electrical connection</b>	
• for auxiliary and control circuit	screw-type terminals
<b>type of connectable conductor cross-sections</b>	
• for auxiliary and control contacts	
— solid	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )
— finely stranded with core end processing	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )
— finely stranded without core end processing	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )
• for AWG cables for auxiliary and control contacts	1x (AWG 20 ... 12)
tightening torque for auxiliary and control contacts with screw-type terminals	0.5 ... 0.6 N·m
tightening torque [lbf·in] for auxiliary and control contacts with screw-type terminals	4.5 ... 5.3 lbf·in
design of the thread of the connection screw of the auxiliary and control contacts	M3
stripped length of the cable for auxiliary and control contacts	7 mm

Safety related data	
<b>protection class IP on the front according to IEC 60529</b>	IP20
<b>touch protection on the front according to IEC 60529</b>	finger-safe, for vertical contact from the front

Ambient conditions	
installation altitude at height above sea level maximum	1 000 m
<b>ambient temperature</b>	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C

Electromagnetic compatibility	
<b>conducted interference</b>	
• due to burst according to IEC 61000-4-4	2 kV / 5 kHz behavior criterion 2
• due to conductor-earth surge according to IEC 61000-4-5	2 kV behavior criterion 2
• due to conductor-conductor surge according to IEC 61000-4-5	1 kV behavior criterion 2
• due to high-frequency radiation according to IEC 61000-4-6	140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1
<b>electrostatic discharge according to IEC 61000-4-2</b>	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
<b>conducted HF interference emissions according to CISPR11</b>	Class A for industrial environment
<b>field-bound HF interference emission according to CISPR11</b>	Class B for the domestic, business and commercial environments

#### Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



[Confirmation](#)



Declaration of Conformity	Test Certificates	other
---------------------------	-------------------	-------



[Type Test Certificates/Test Report](#)

[Confirmation](#)

## Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2920-0FA08>

Cax online generator


<http://support.automation.siemens.com/WWW/CAXorder/default.aspx?lang=en&mlfb=3RF2920-0FA08>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2920-0FA08>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RF2920-0FA08&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2920-0FA08&lang=en)

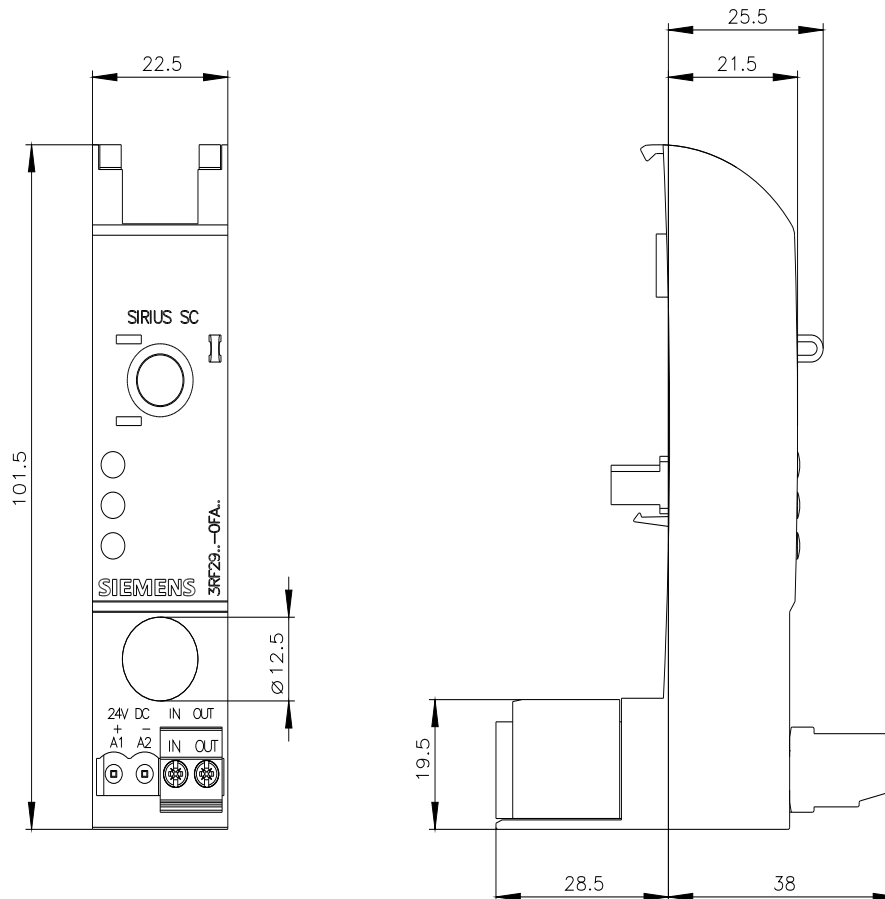

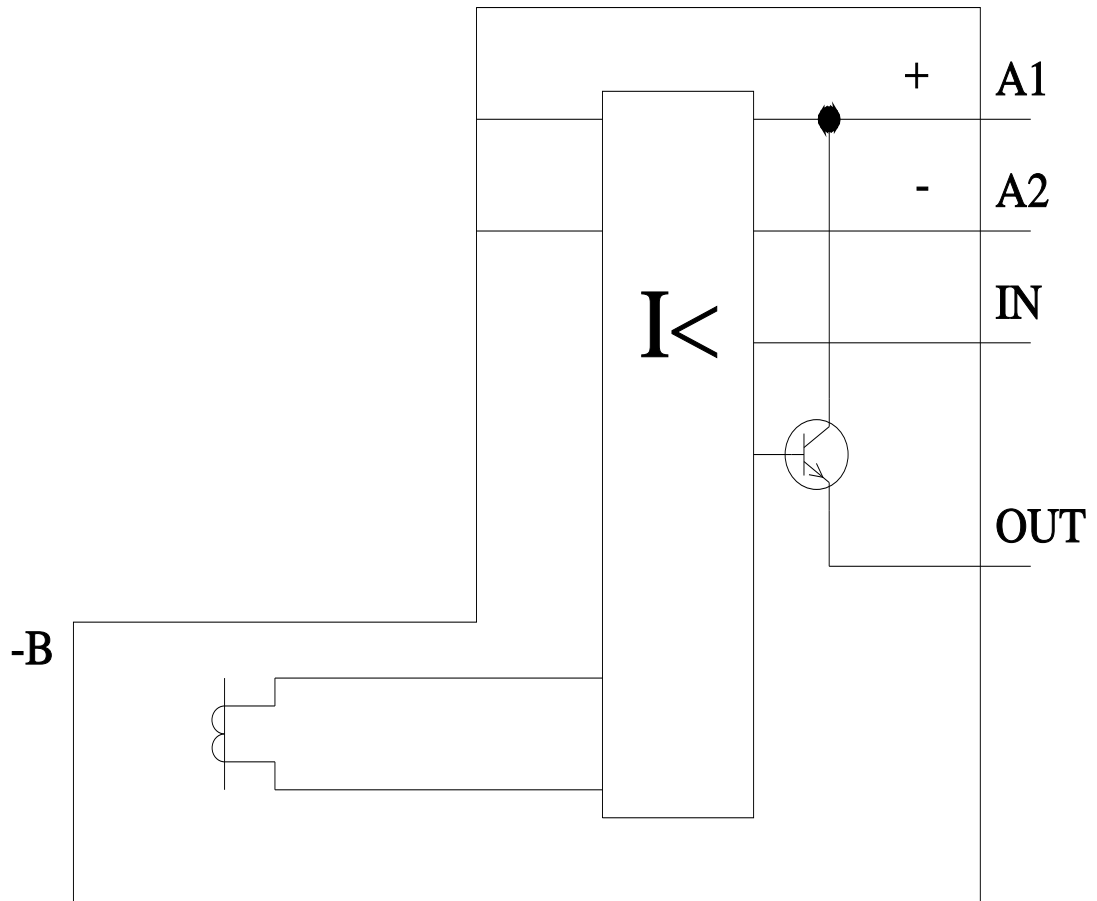

last modified:

3/17/2021 