## SIEMENS

## Data sheet

## 3SU1000-0AB40-0AA0



Pushbutton, 22 mm, round, plastic, green, pushbutton, flat momentary contact type

product brand name	SIRIUS ACT		
product designation	Pushbuttons		
design of the product	Actuating/signaling element		
product type designation	3SU1		
product line	Plastic, black, 22 mm		
Enclosure	,		
number of command points	1		
Actuator			
design of the actuating element	Flat button		
principle of operation of the actuating element	momentary contact type		
product extension optional			
light source	No		
contact module	Yes		
color of the actuating element	green		
material of the actuating element	plastic		
shape of the actuating element	round		
outer diameter of the actuating element	29.5 mm		
Front ring			
product component front ring	Yes		
design of the front ring	Standard		
material of the front ring	plastic		
color of the front ring	black		
General technical data			
protection class IP	IP66, IP67, IP69(IP69K)		
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13		
shock resistance			
<ul> <li>according to IEC 60068-2-27</li> </ul>	sinusoidal half-wave 15g / 11 ms		
<ul> <li>for railway applications according to EN 61373</li> </ul>	Category 1, Class B		
vibration resistance			
<ul> <li>according to IEC 60068-2-6</li> </ul>	10 500 Hz: 5g		
<ul> <li>for railway applications according to EN 61373</li> </ul>	Category 1, Class B		
operating frequency maximum	3 600 1/h		
mechanical service life (operating cycles) typical	10 000 000		
reference code according to IEC 81346-2	S		
Substance Prohibitance (Date)	10/01/2014		
Ambient conditions			
ambient temperature			
<ul> <li>during operation</li> </ul>	-25 +70 °C		
during storage	-40 +80 °C		
environmental category during operation according to IEC	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)		

60721		
Installation/ mounting/ dimensions		
height	29.5 mm	
width	29.5 mm	
shape of the installation opening	round	
mounting diameter	22.3 mm	
positive tolerance of installation diameter	0.4 mm	
mounting height	11 mm	
installation width	29.5 mm	
installation depth	24.3 mm	
Certificates/ approvals		


General Product Approval

**Declaration of Conformity** 

(SP)	<u>Confirmation</u>		EHC	CE EG-Konf.	UK CA
Test Certificates		Marine / Shipping			
<u>Special Test Certific-</u> <u>ate</u>	<u>Type Test Certific-</u> ates/Test Report	ABS	Lloyd's Register urs	PRS	RINA
other	Environment				
<u>Confirmation</u>	Environmental Con- firmations				

iemens has decided to exit the Russian market (see here). ttps://press.siemens.com/global/en/pressrelease/siemens-wind-down-russia	
	an-business
<b>Siemens is working on the renewal of the current EAC certificates.</b> Please contact your local Siemens office on the status of validity of the EAC EAC relevant market (other than the sanctioned EAEU member states Russi	
nformation on the packaging	
ttps://support.industry.siemens.com/cs/ww/en/view/109813875	
nformation- and Downloadcenter (Catalogs, Brochures,)	
ttps://www.siemens.com/ic10	
ndustry Mall (Online ordering system)	
ttps://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1000	D-0AB40-0AA0
ax online generator	
ttp://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en	<u>&amp;mlfb=3SU1000-0AB40-0AA0</u>
ervice&Support (Manuals, Certificates, Characteristics, FAQs,)	
ttps://support.industry.siemens.com/cs/ww/en/ps/3SU1000-0AB40-0AA0	

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3SU1000-0AB40-0AA0&lang=en

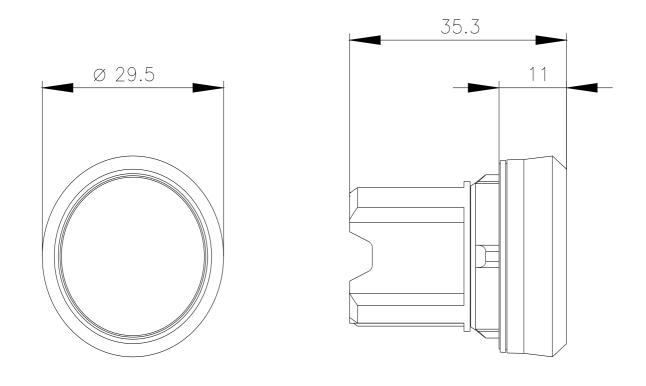

last modified:

1/26/2022 🖸