

SOA | OASIS™

WALL FAN HEATER

oasis®



GRANDS
PRIX
DU DESIGN



MAKE YOUR BATHROOM AN OASIS OF PEACE AND TRANQUILITY

The quiet and discreet Oasis bathroom fan heater provides all the comfort you need. It features a highly accurate electronic thermostat and optimal heat output, so you can easily and rapidly control the comfort-level of your rooms. Also offered without a thermostat, it's the perfect little device to heat small rooms like vestibules or hallways. In addition, its refined look and high-performance polymer finish blend in with any decor.

- **ULTRA-QUIET FAN HEATER**
- **HEAT "BOOST" MODE**
FAST TEMPERATURE INCREASE
(1000 W TO 2000 W)†
- **FEATURING HIGH-PERFORMANCE
POLYMER AND SATIN-FINISH
PAINTED STEEL**
- **OPTIONAL BUILT-IN
ELECTRONIC THERMOSTAT**

COLOUR

- white

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- high performance polymer cabinet and front edges, 20-gauge satin-finish steel front
- centrifugal fan that ensures a quiet and efficient airflow
- thermal protections with manual reset
- top front air intake and bottom front air discharge
- 6 ft (2 m) 16 gage molded cable with 3-prong grounded, 120 V plug (SOA1501PW model)

ELEMENT

- high-quality nichrome element that generates instant heat

CONTROL

MODEL WITHOUT A THERMOSTAT:

- an electronic wall thermostat is recommended

MODEL WITH A BUILT-IN THERMOSTAT:

- built-in electronic thermostat
- 1000 W to maintain temperature setpoint
- 2000 W when "boost" mode is activated (with a timer)
- drastic temperature drop detection (open window function)

INSTALLATION

- recessed or surface mounted – surface adapter not required
- on the wall, a minimum of 6 in. from the floor
- front easy to install with only one mounting screw
- power switch selector – 1000 W or 2000 W (model without a thermostat only)

WARRANTY

- five years, *three years on electronic components

† 5°C (9°F) temperature rise within five minutes. (Tests performed with the 2000 W model in a 70 ft² room.)



ALSO AVAILABLE

**EASY INSTALLATION
WITH 120 V PLUG**

IDEAL FOR:

bathroom, entrance, vestibule, hallway, living space

°STELPRO

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-colour products. For all the latest models and prices, please refer to our website at www.stelpro.com.



FC_SOA_EN_150623




TECHNICAL SPECIFICATIONS

PRODUCT	WITH THERMOSTAT		WITHOUT THERMOSTAT	VOLTAGE	HEIGHT		LENGTH		WEIGHT	
	HEATING	HEAT "BOOST" MODE			MM	IN.	MM	IN.	KG	LB
CODE	WATTS	WATTS	WATTS	VOLTS						
SOA2002W	1000/750	2000/1500	---	240/208	402	15 13/16	305	12	3.6	7.9
SOA2002WCW	---	---	2000/1500 or 1000/750*	240/208	402	15 13/16	305	12	3.6	7.9
MODEL WITH 120 V PLUG (RESIDENTIAL OUTLET)										
SOA1501PW	1000	1500	---	120	402	15 13/16	305	12	3.6	7.9

* Select when installing with a power switch

TECHNICAL DRAWINGS

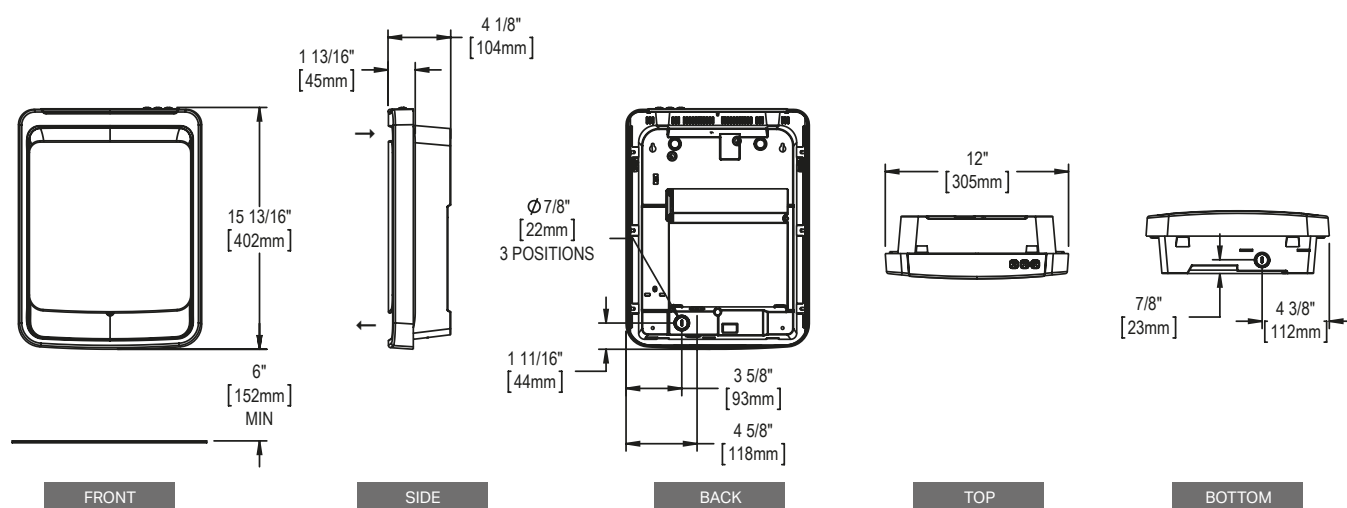

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-colour products. For all the latest models and prices, please refer to our website at www.stelpro.com.